




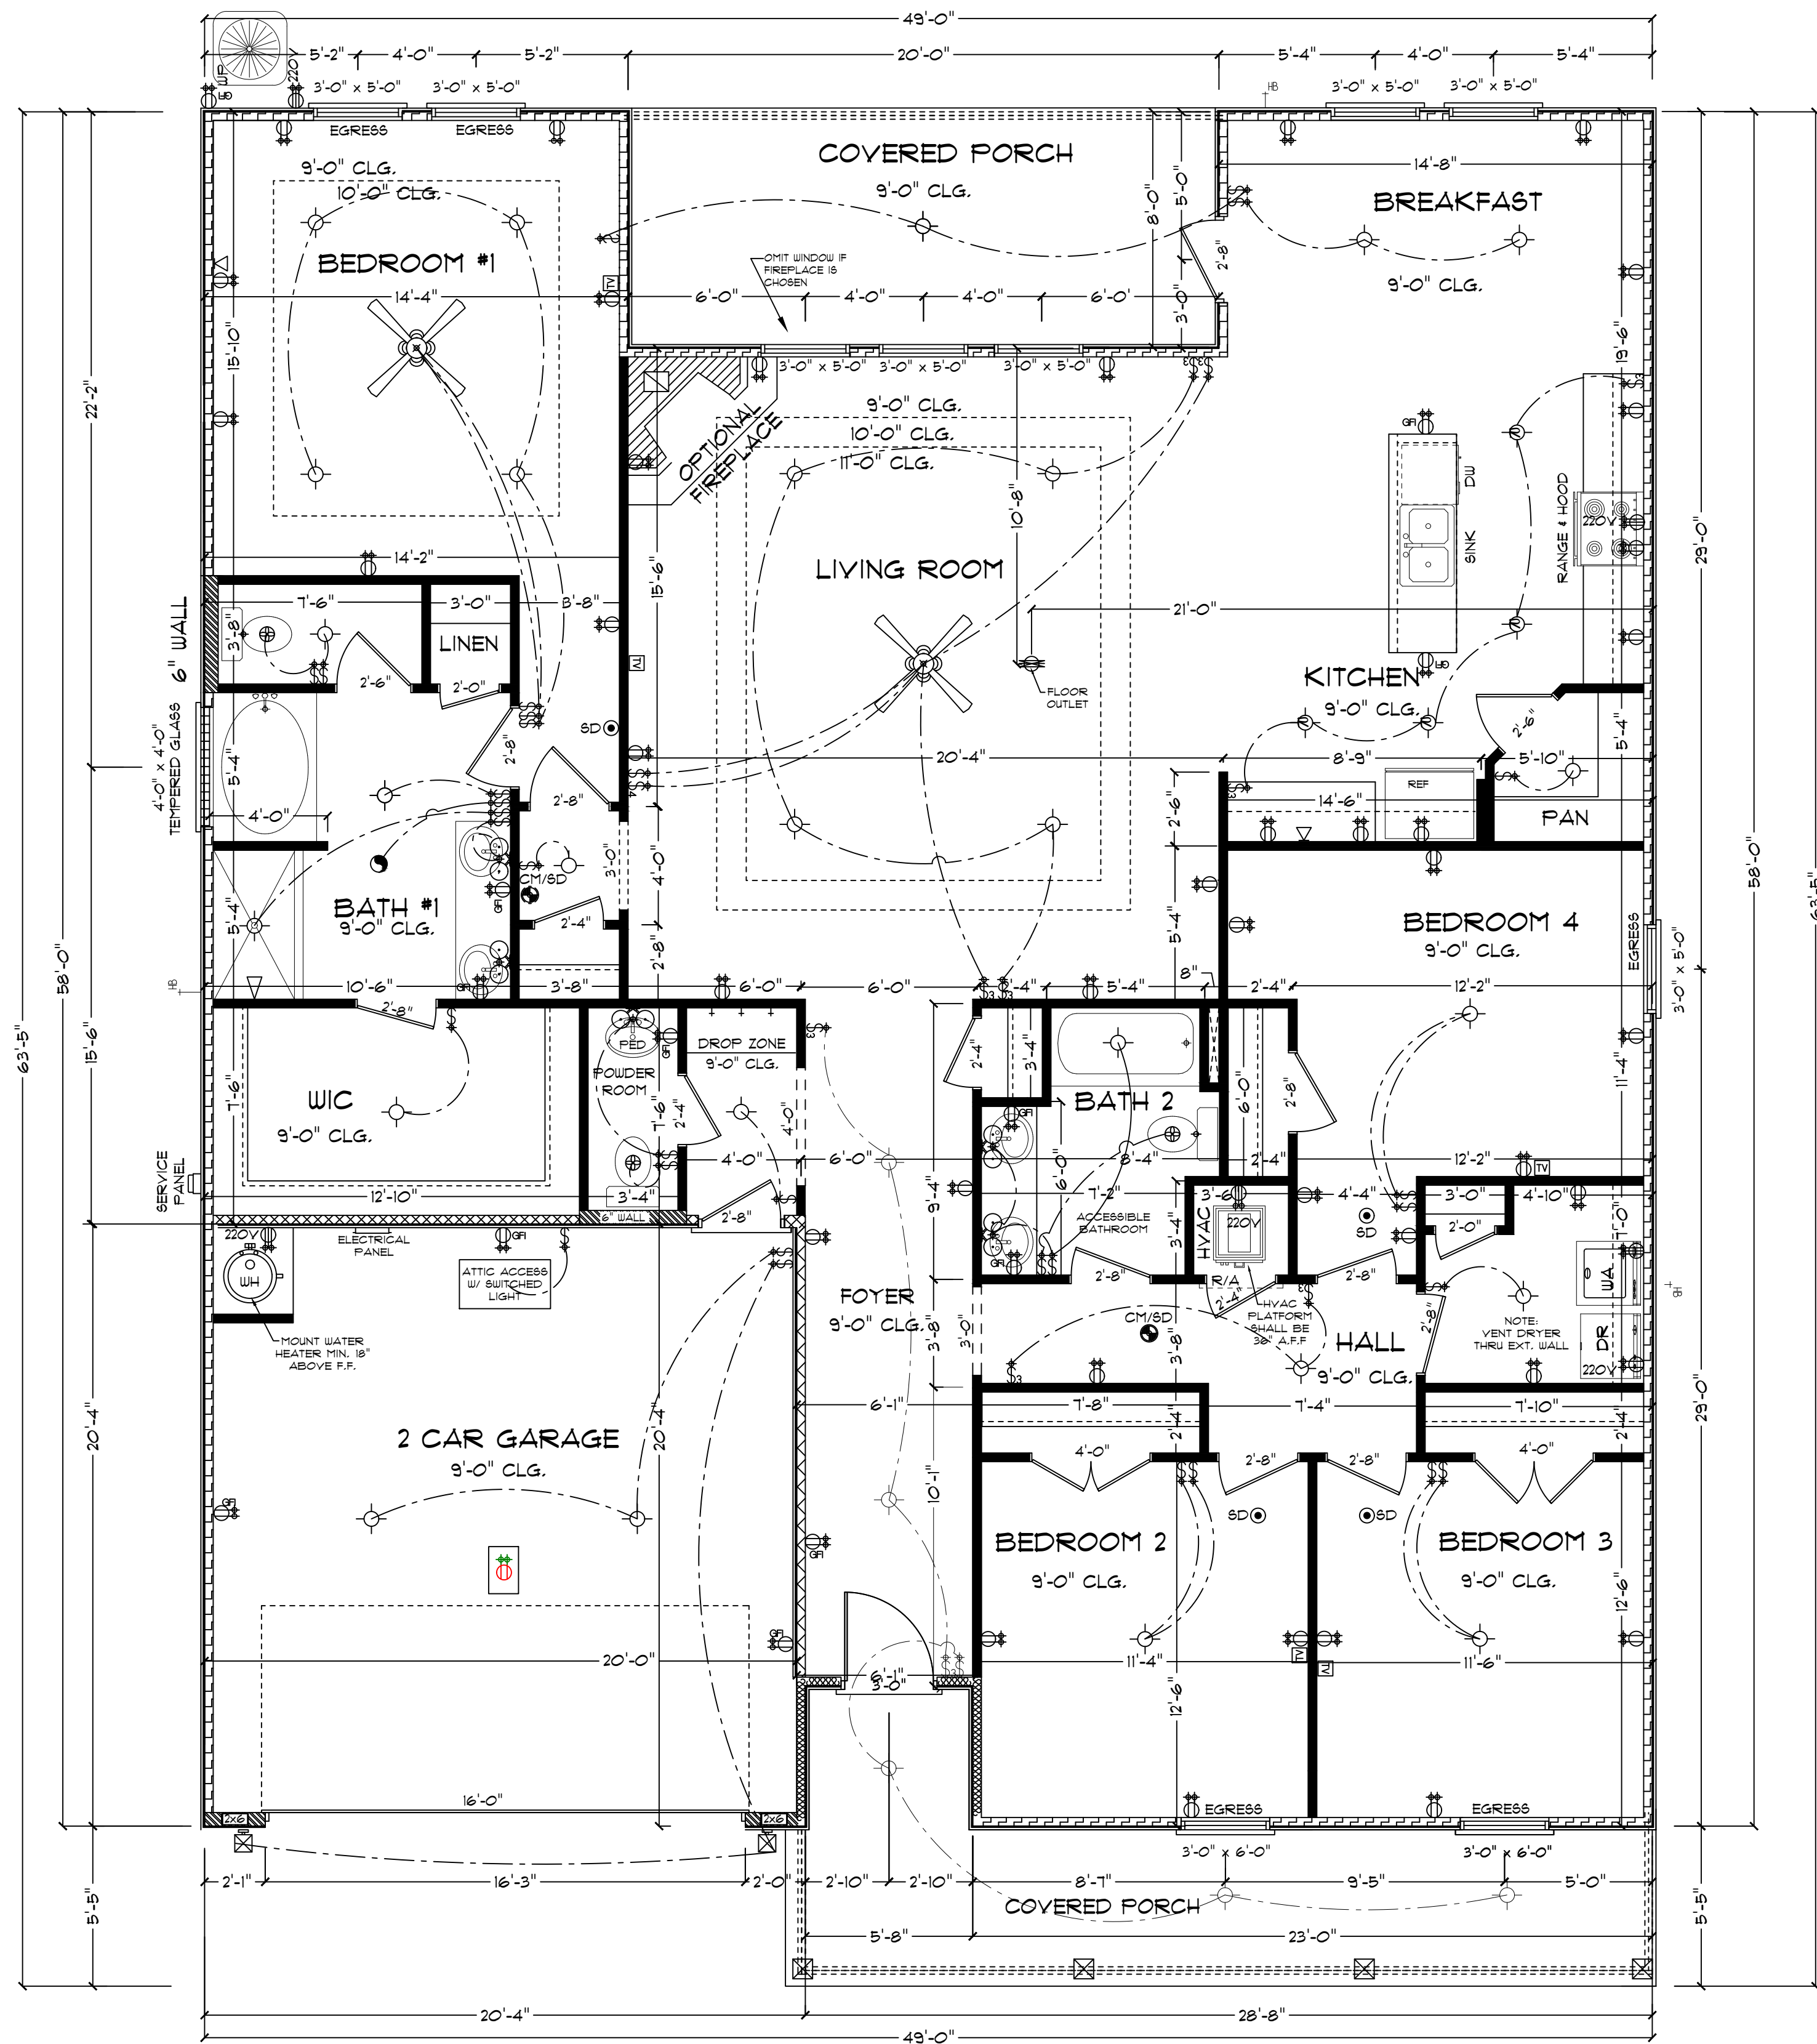
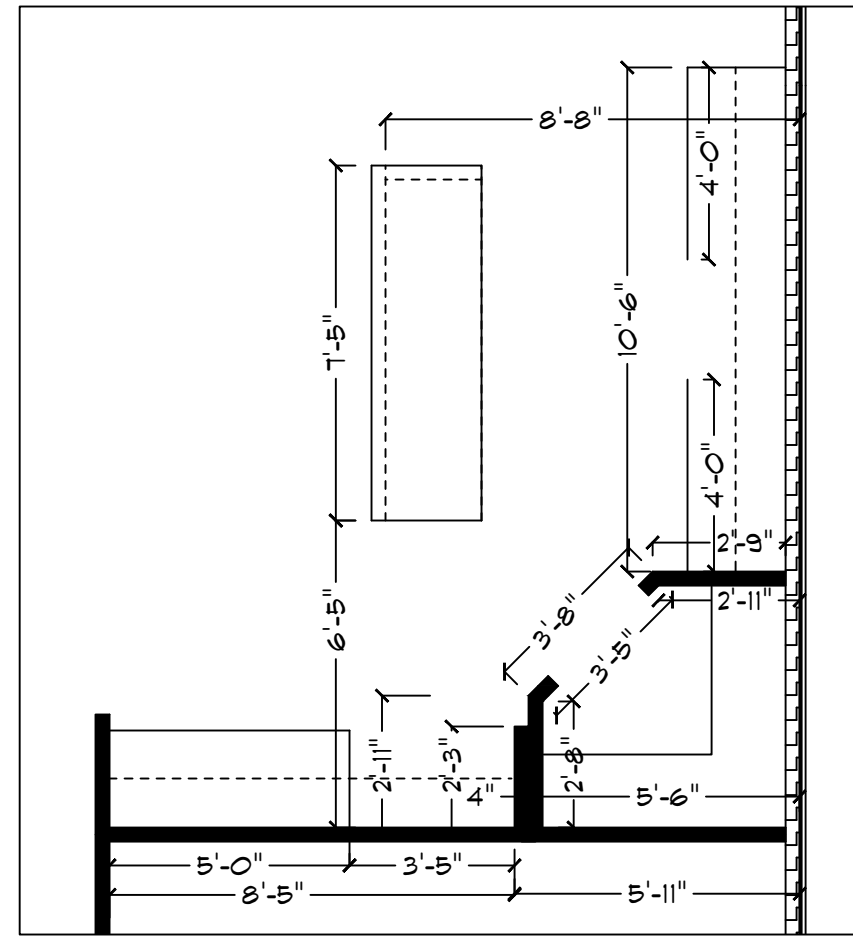


ELECTRICAL LEGEND		
ELECTRICAL	COUNT	SYMBOL
ceiling fan spotlights 02	2	
exterior light 08	2	
1x4 fluorescent fixture	2	
electrical meter	1	
electrical panel	1	
Carbon Monoxide Detector/ Smoke Detector	2	CH/SC 
Floor outlet 4 plex	1	
cable tv outlet	6	
fan	3	
garage door	1	
light	18	
outlet	36	
outlet 220v	5	
outlet gfi	17	
recessed light	4	
smoke detector2	5	SC 
switch	30	
switch 3 way	8	
switch 4 way	1	
telephone	2	
wall mounted 01 2 lights	5	

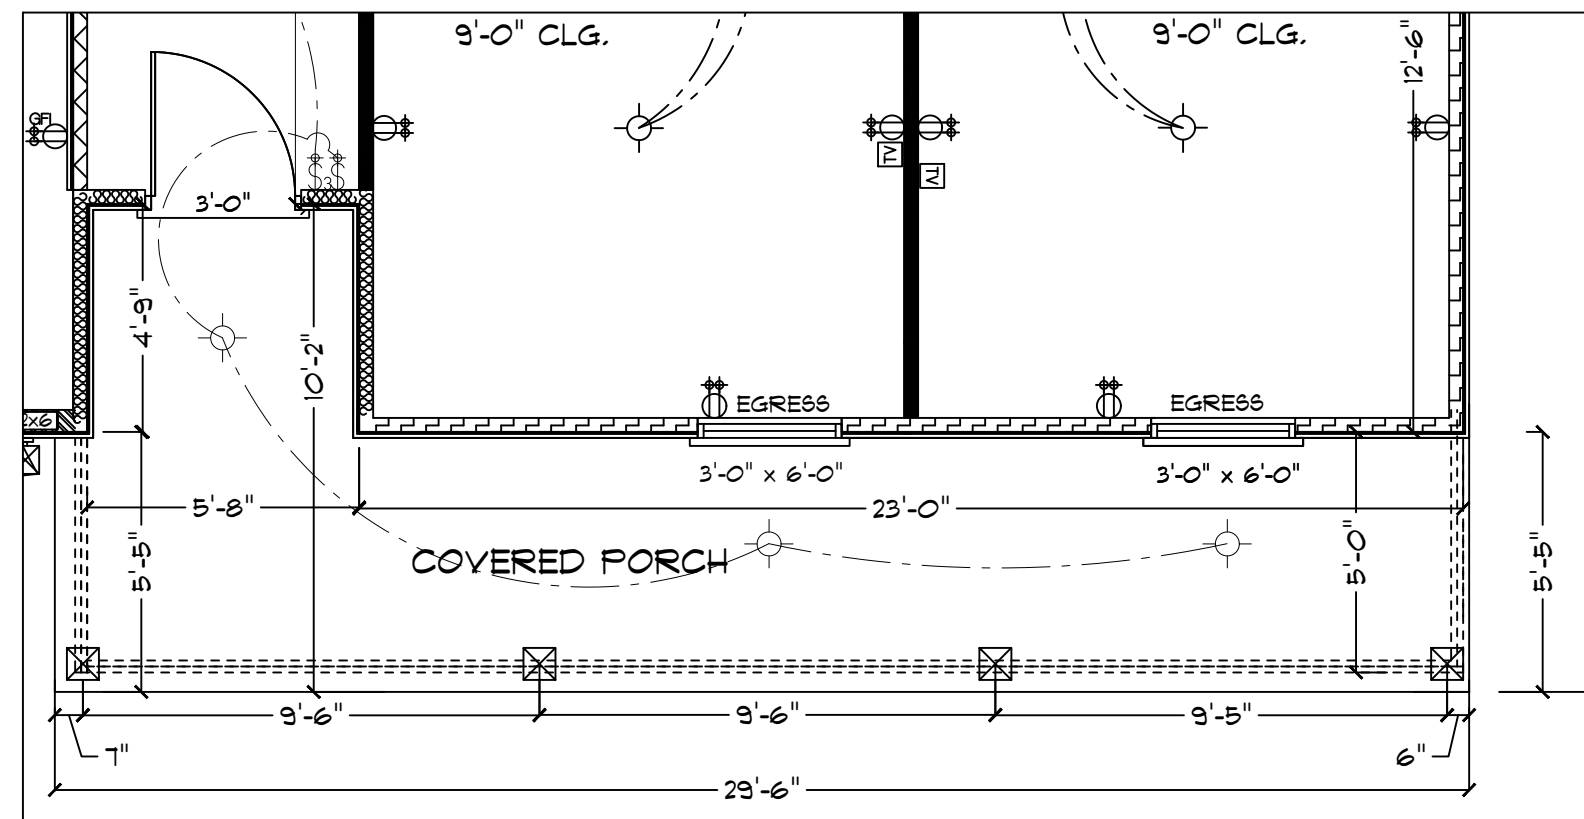


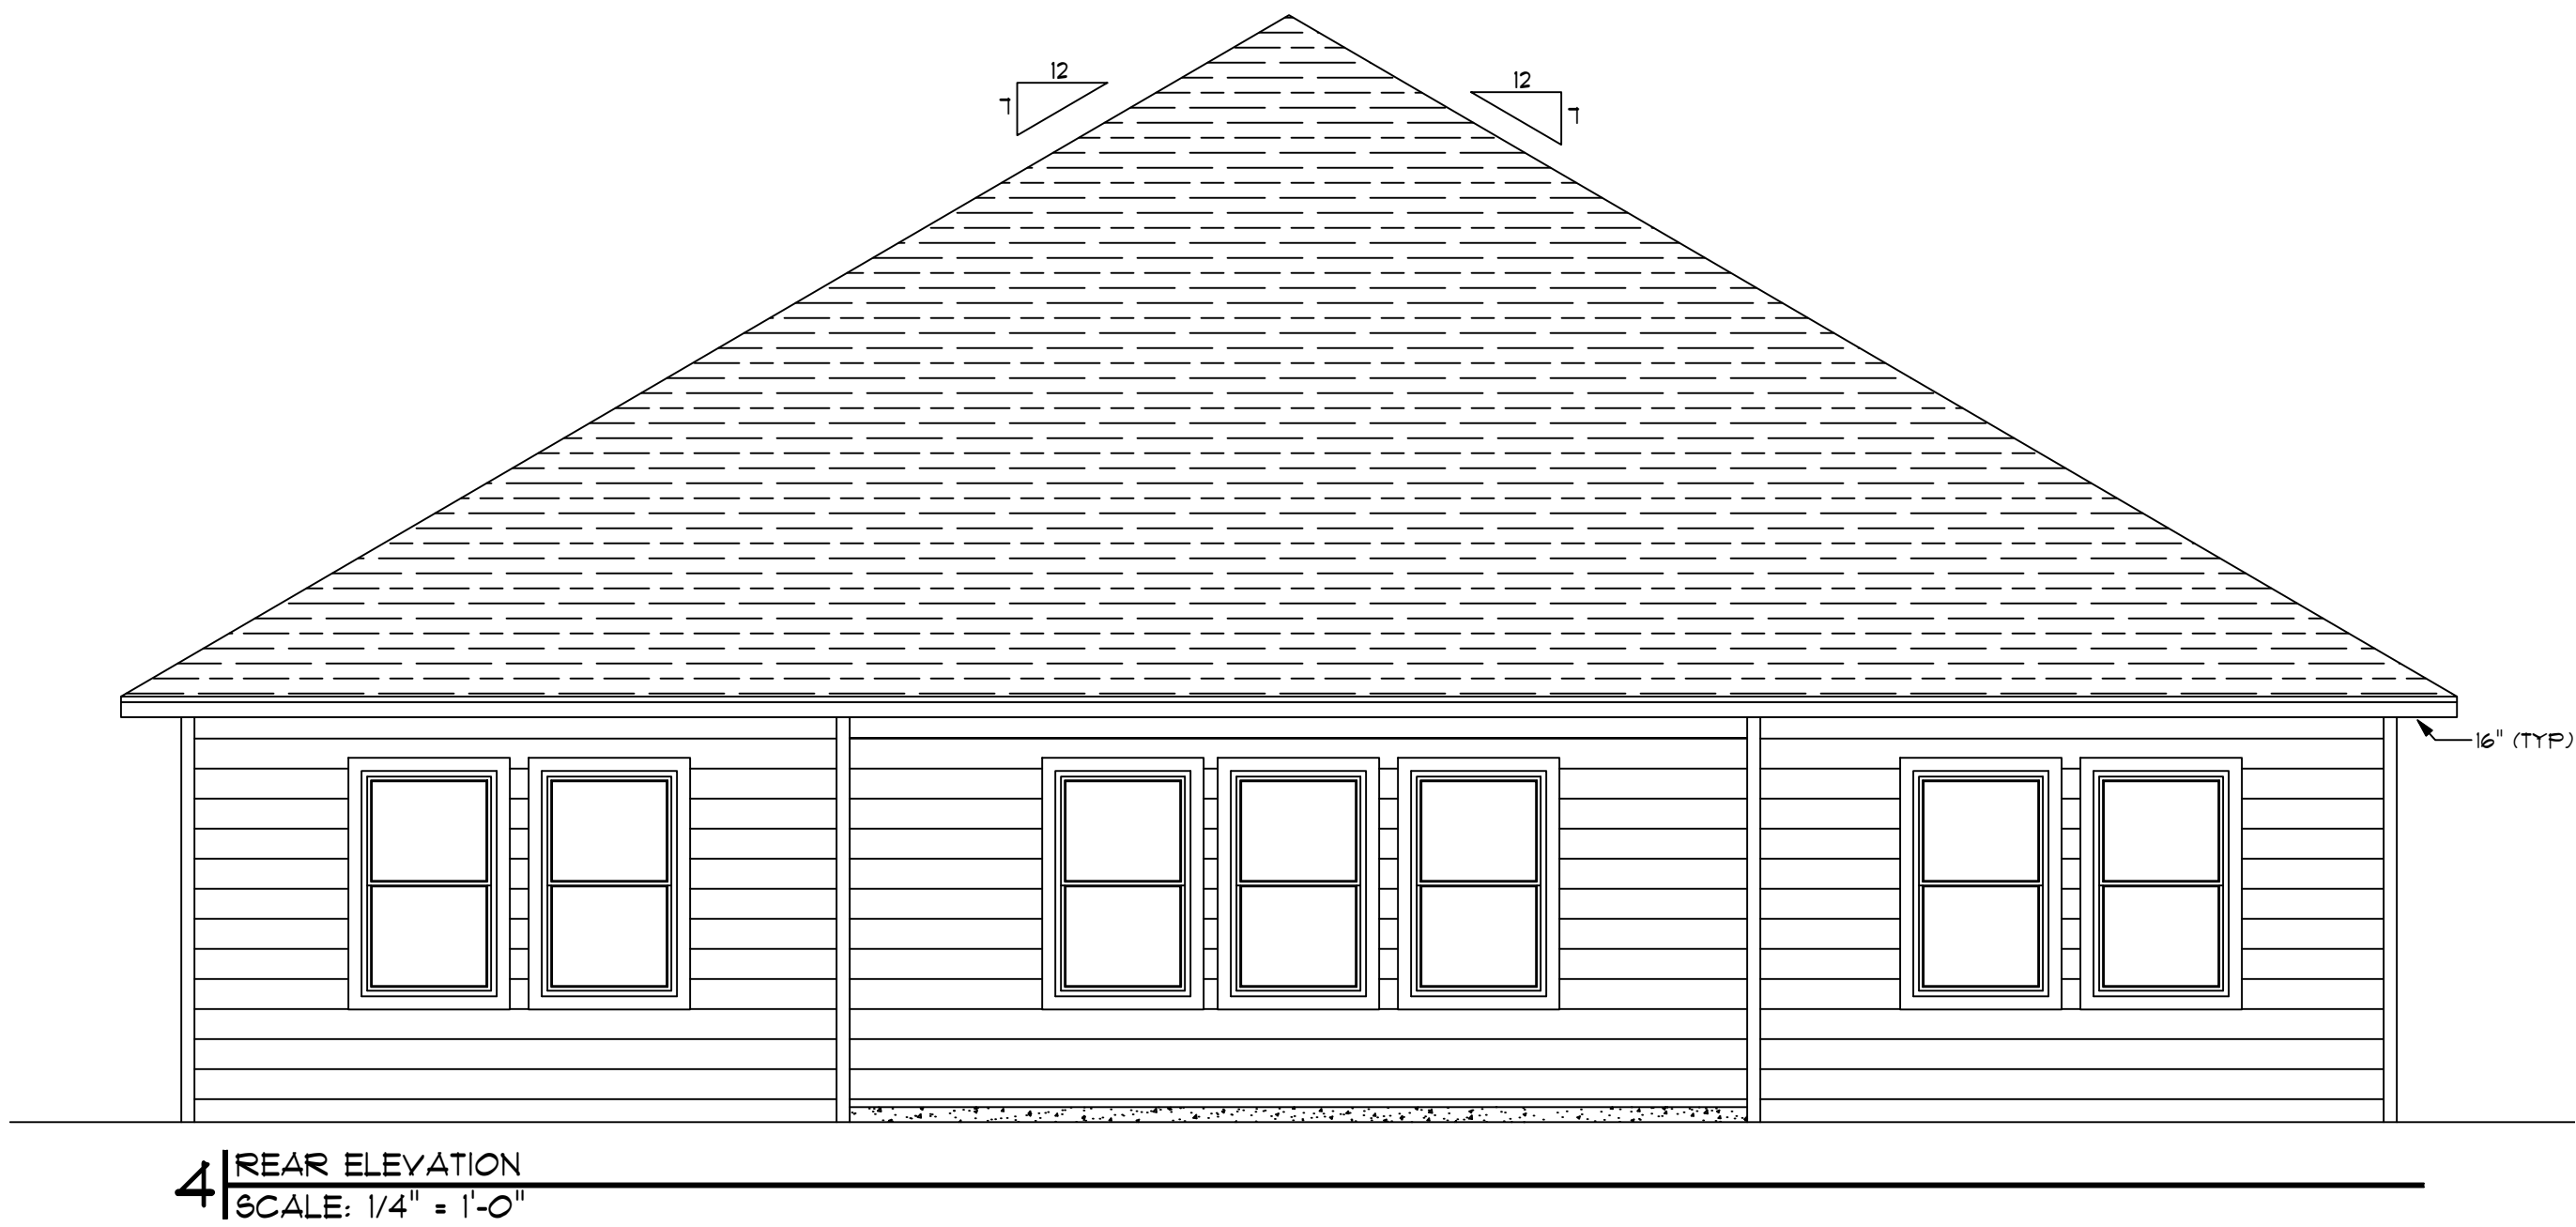


4 | REAR ELEVATION
SCALE: 1/4" = 1'-0"

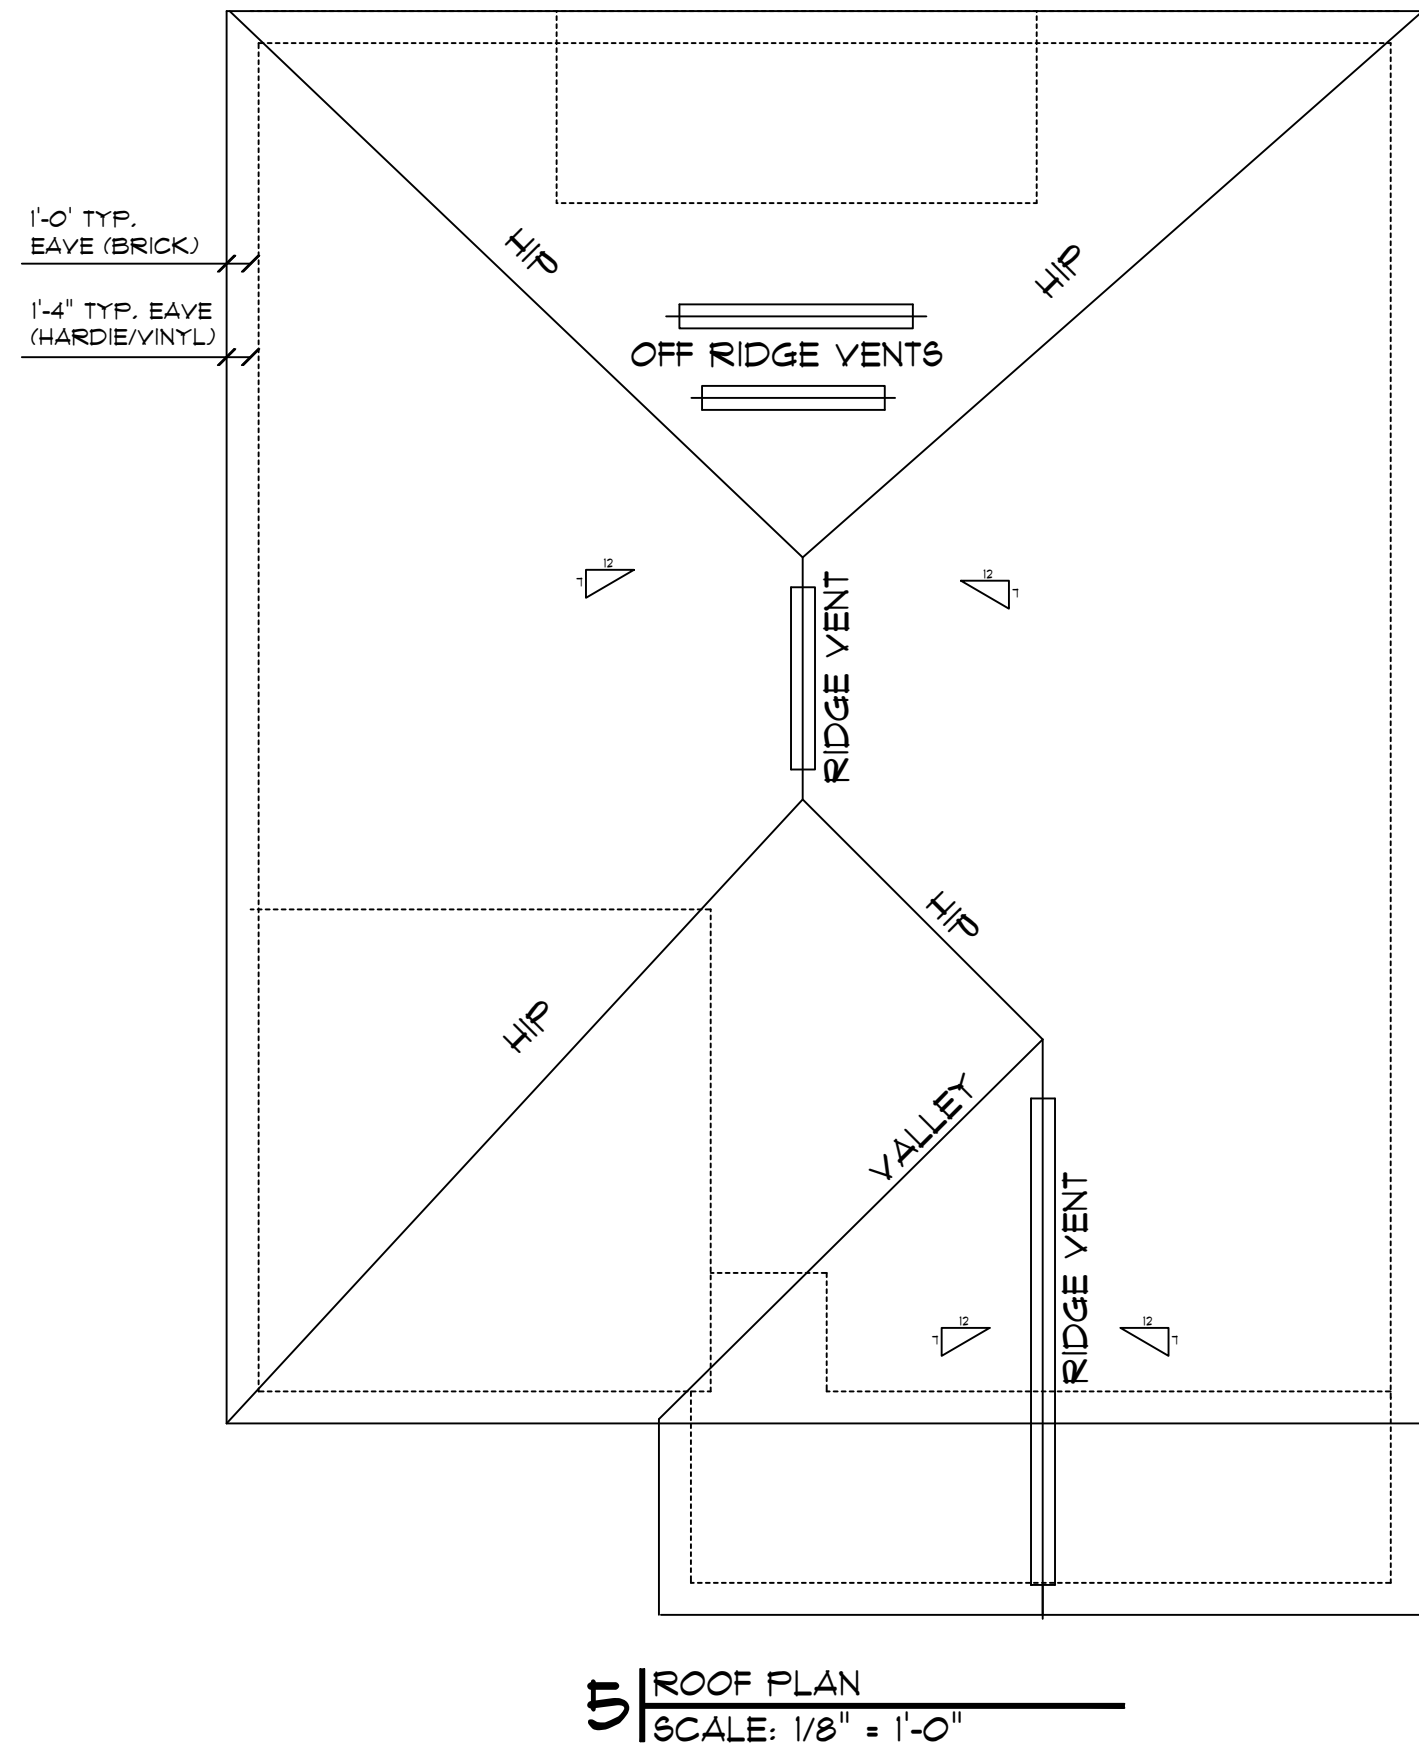


5 | ROOF PLAN
SCALE: 1/8" = 1'-0"

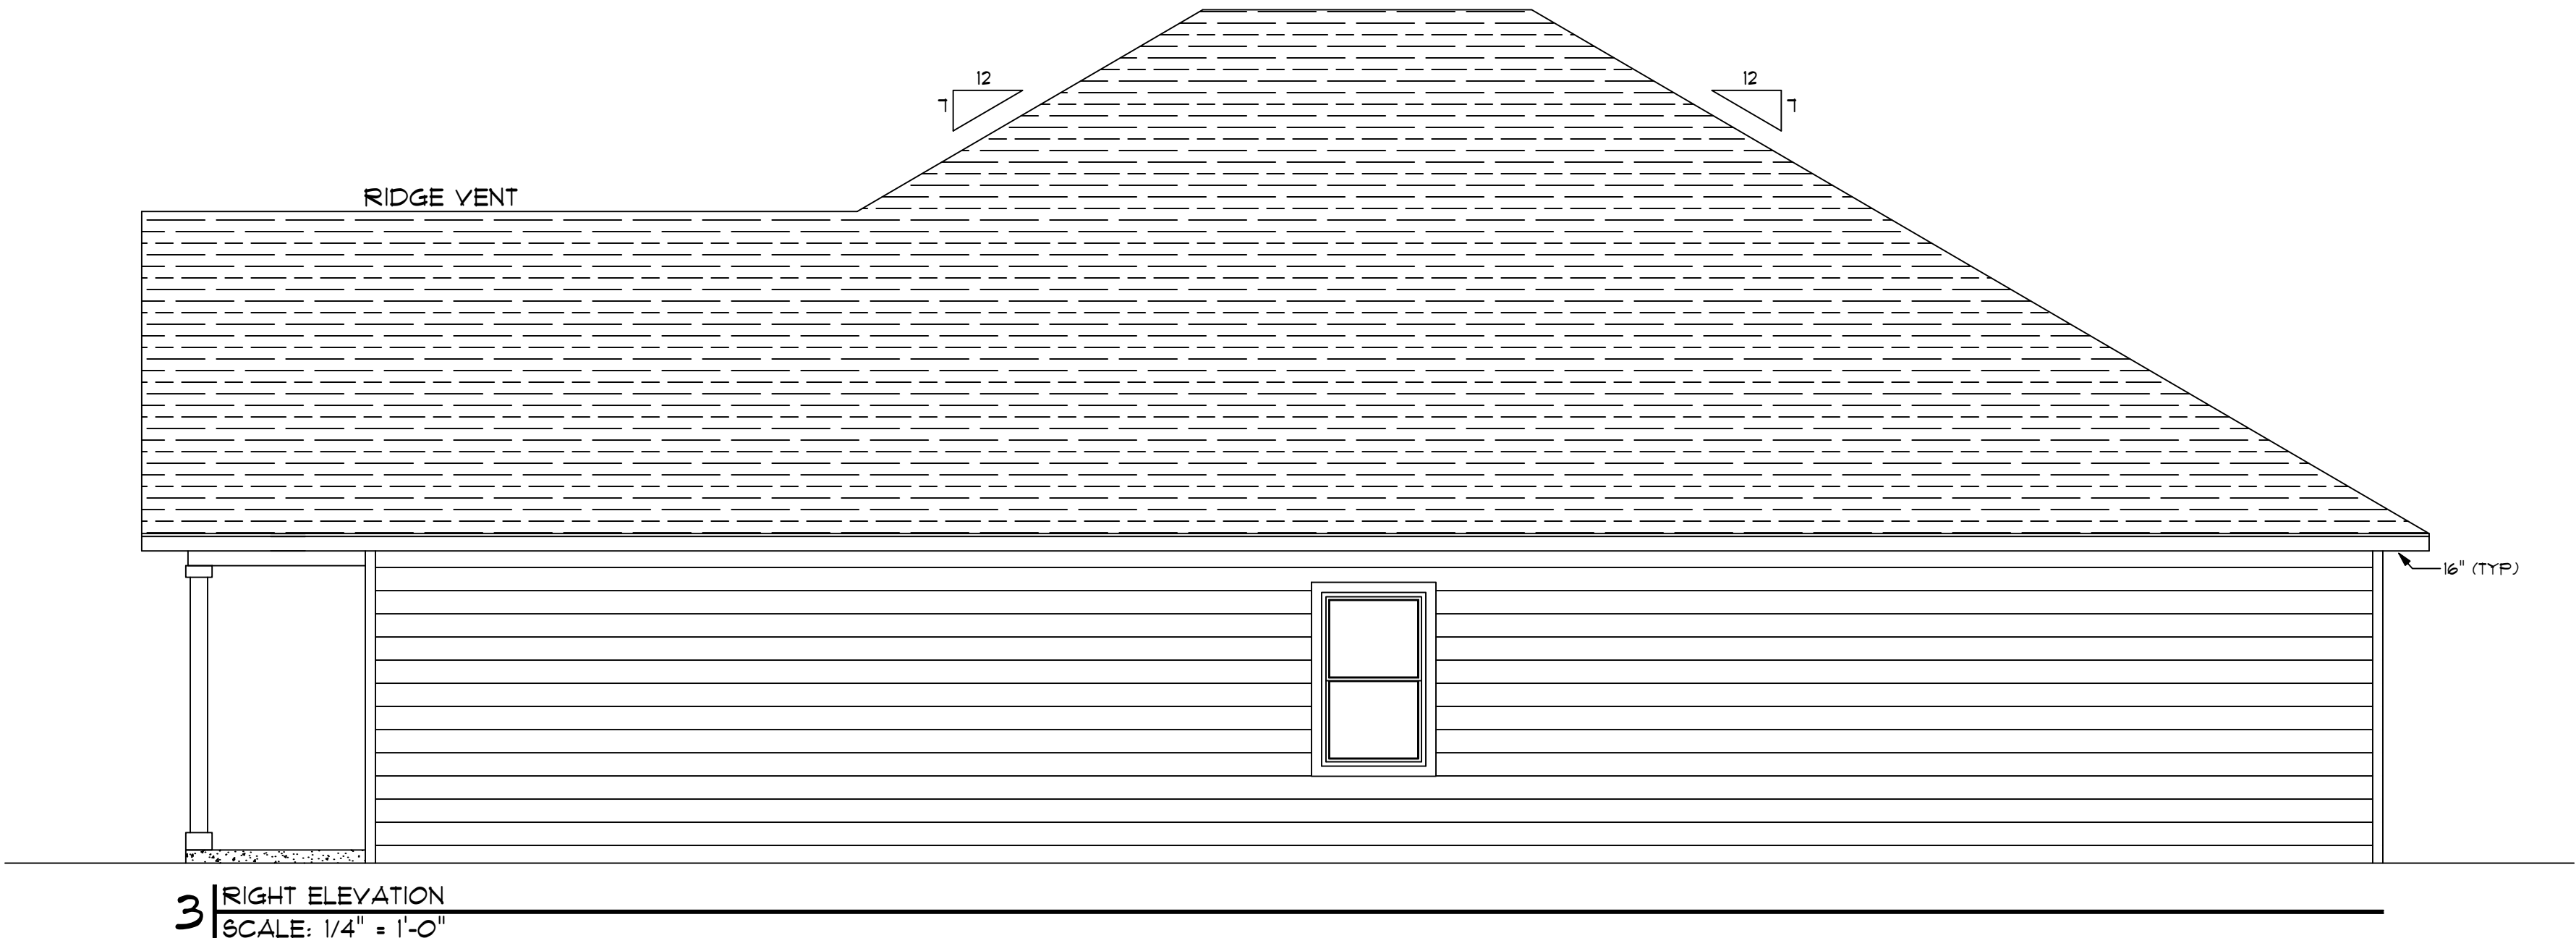

3 | RIGHT ELEVATION
SCALE: 1/4" = 1'-0"

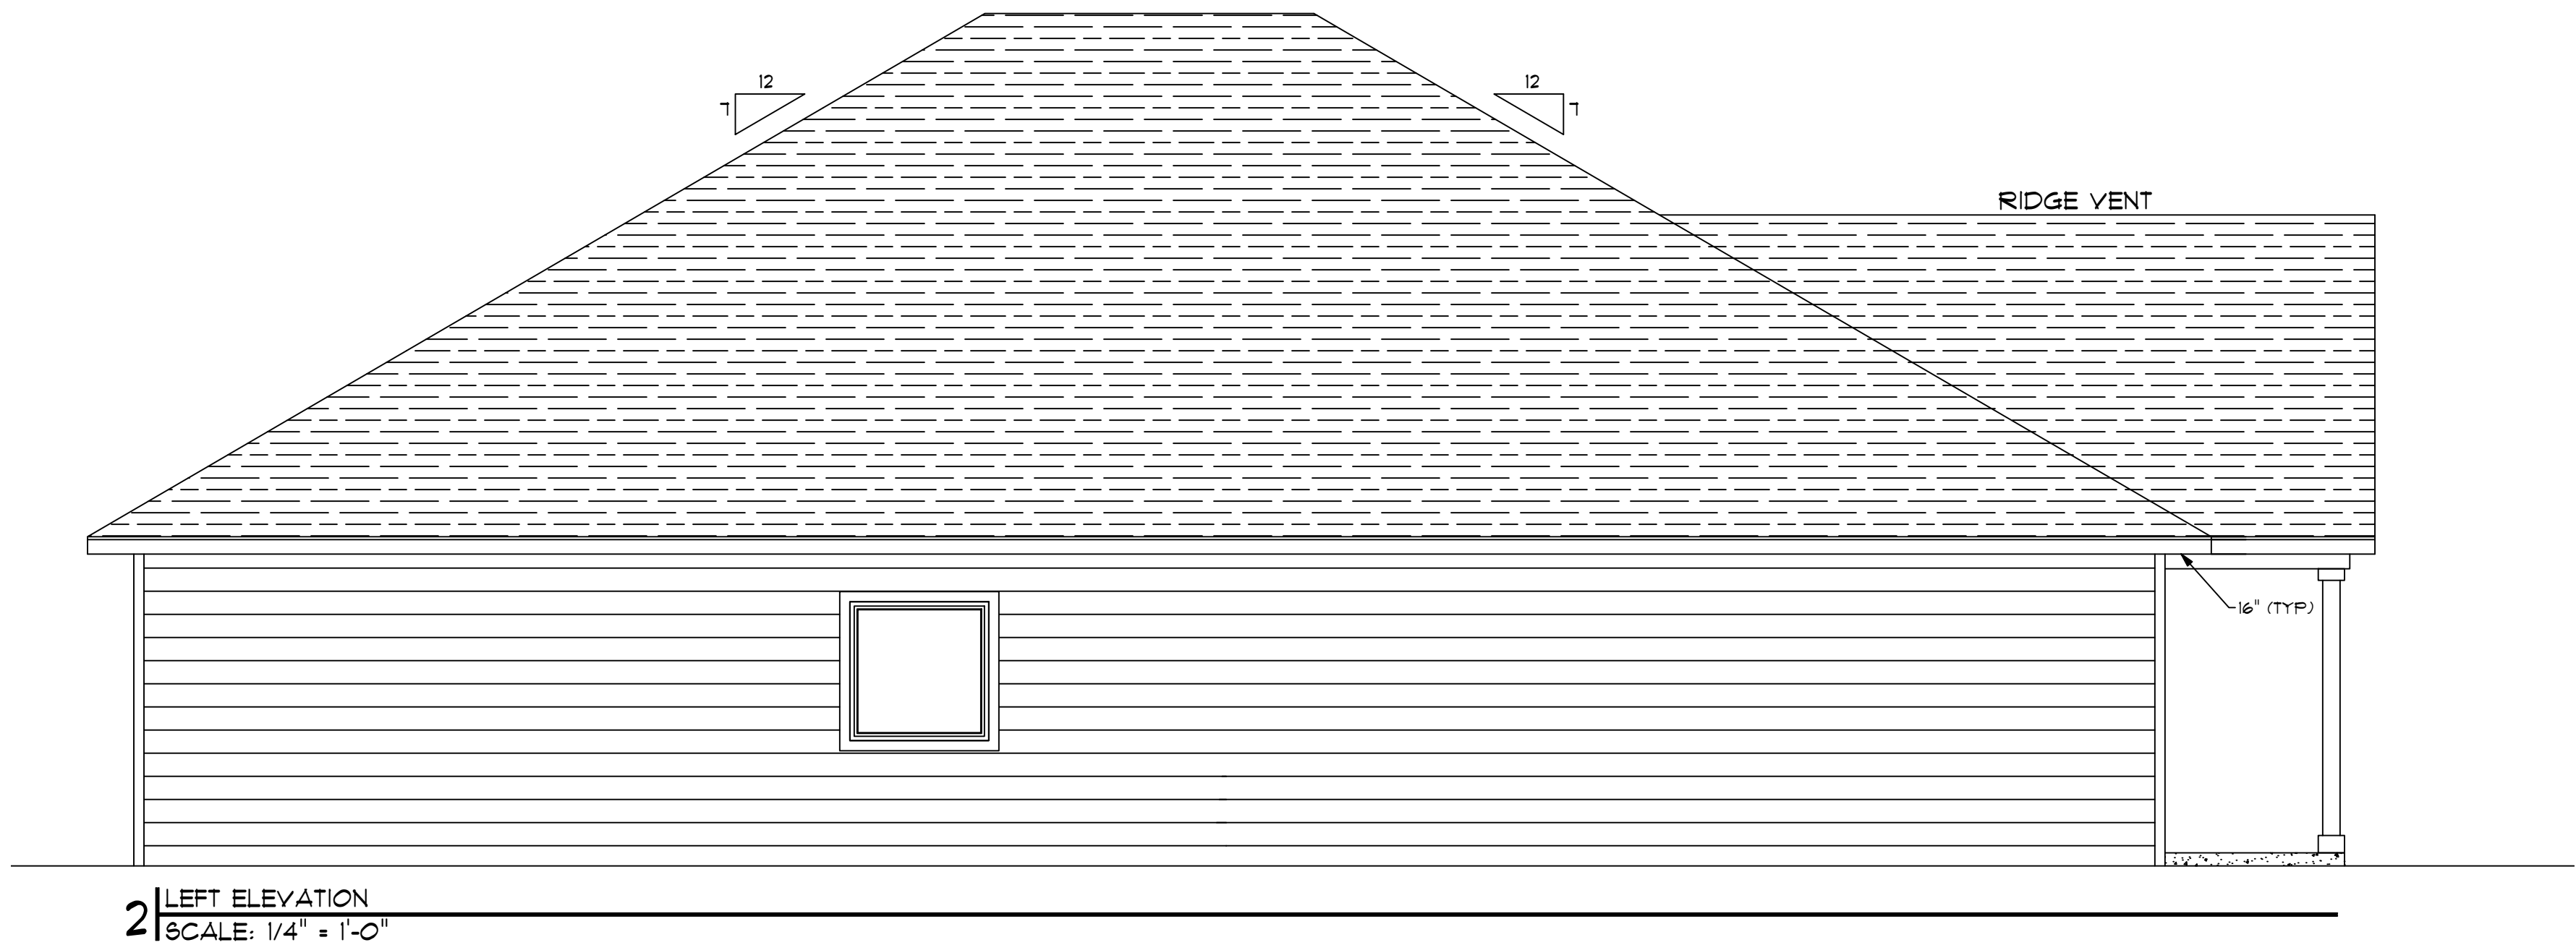

2 | LEFT ELEVATION
SCALE: 1/4" = 1'-0"

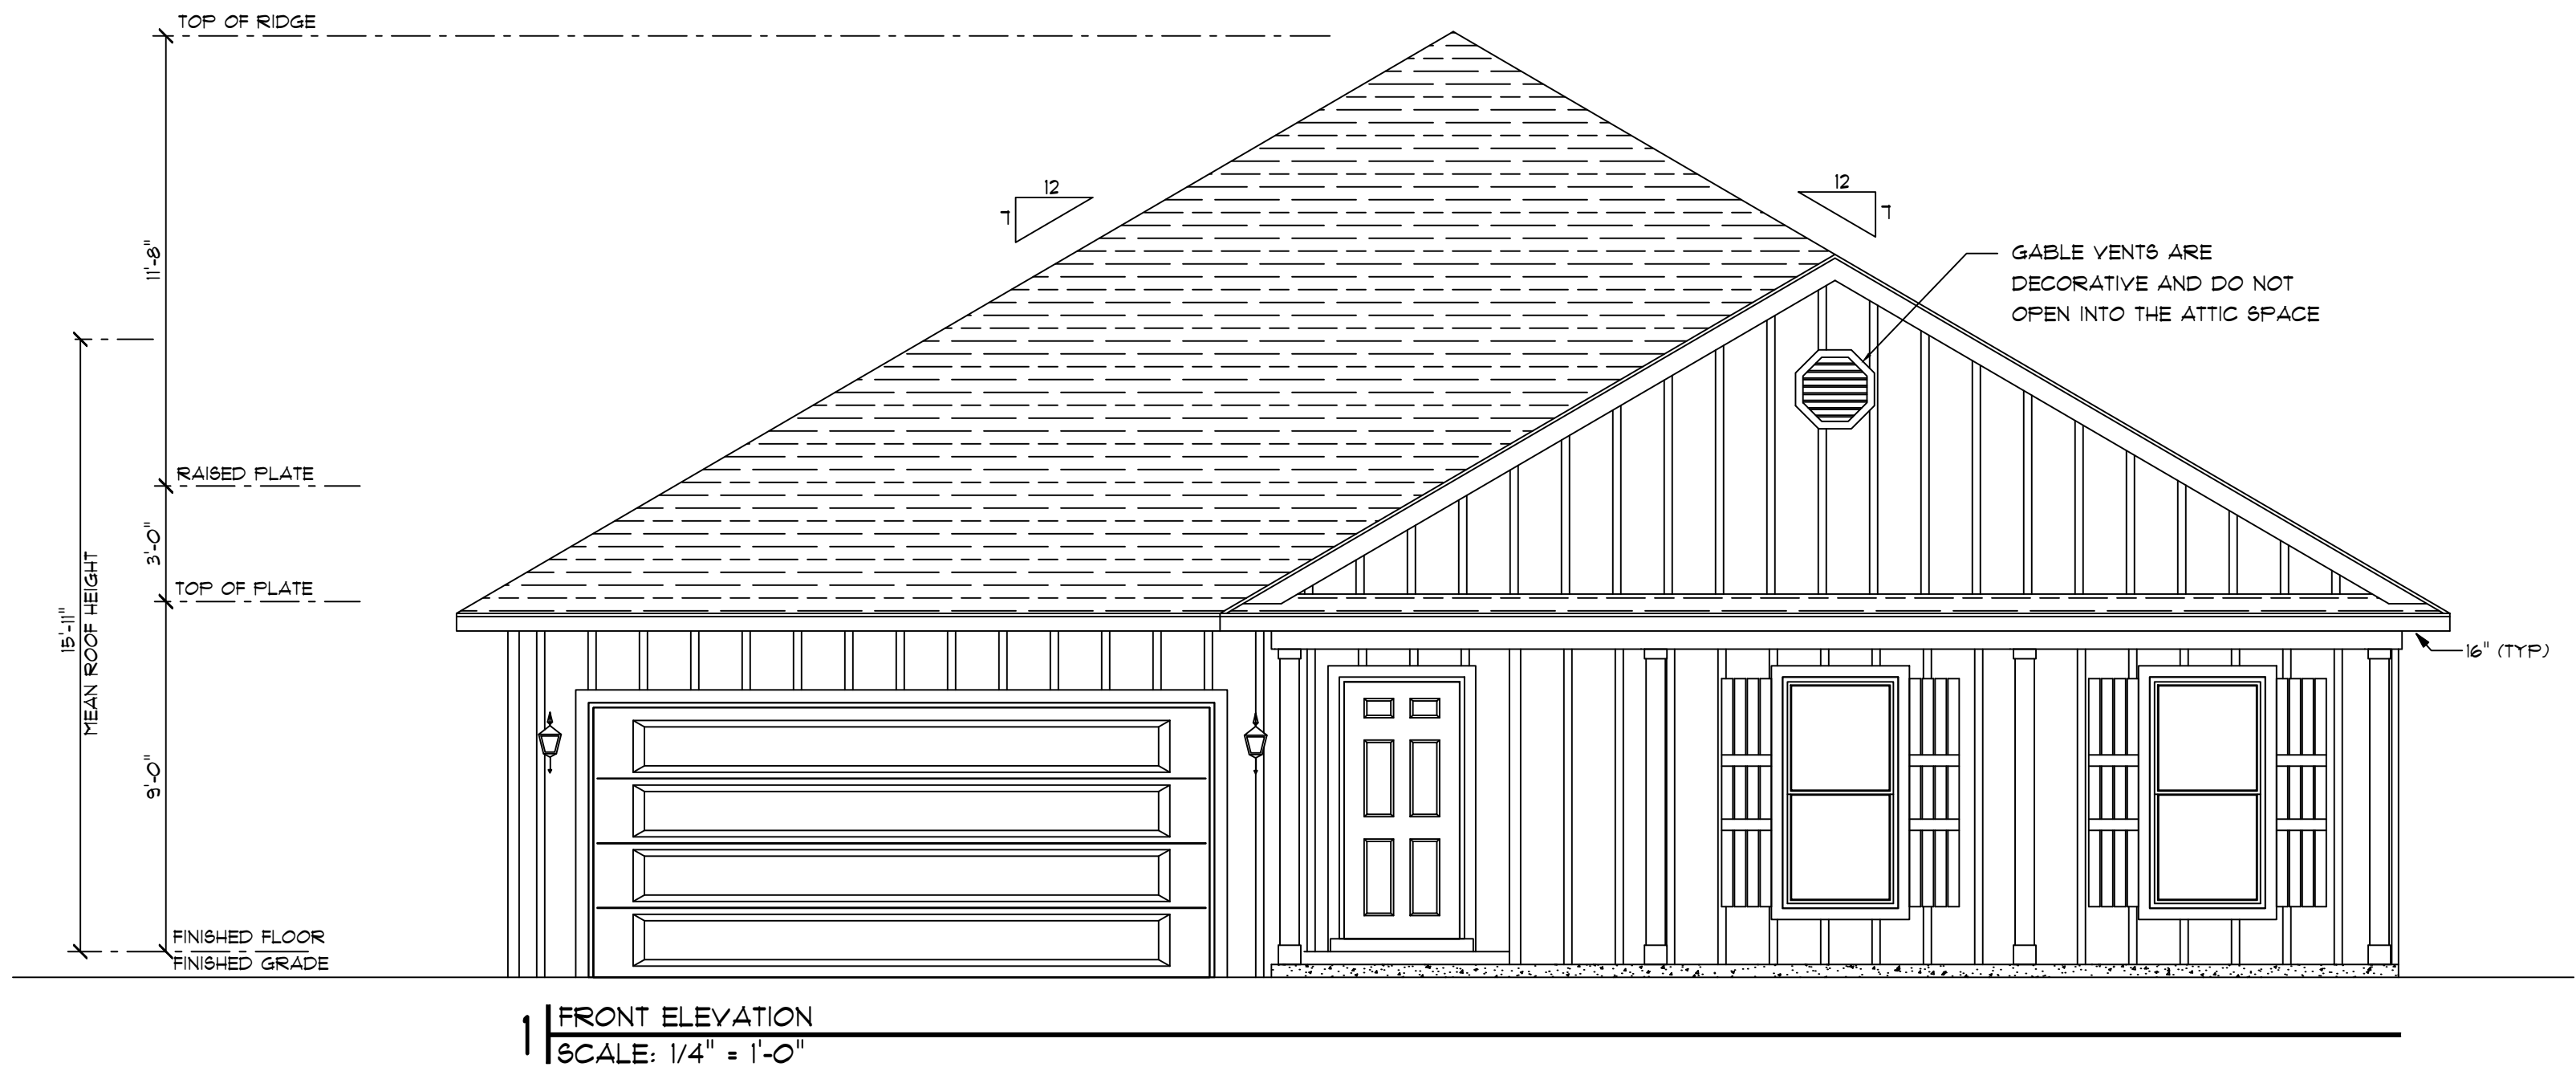

1 | FRONT ELEVATION
SCALE: 1/4" = 1'-0"

25366 Profit Drive
Daphne, AL
1-877-788-0329
251-447-3029

D.R. HORTON
America's Builder

CHRISTOPHER OSHEA, P.E.
DPA, C-105
BROOKLYN, NY
NO. 42908
PROFESSIONAL
LOCATION: LOWDES COUNTY, GA
Reason: Certification
Contact Info: Christopher
OShea, P.E.
Date: 2024-04-23
01:57:23-0500

LOT #61
BALLANTYNE
LOWDES COUNTY, GA
ELEVATIONS & ROOF PLAN

PLAN NAME:
VICTORIA G15 LFE
BB FRONT W/ LAP SIDES

DATE ISSUED:	APRIL 22, 2024
DATE PLOTTED:	APRIL 22, 2024
MASTER PERMIT #:	CURRENT PERMIT #:
DRAWN BY:	CHECKED BY:
KARLIE CUNILL	KARLIE CUNILL
SHEET No.:	A-2
SHEET 2 OF 2	

1. ALL STRUCTURES DEFINED ON THIS DRAWING SHALL CONFORM TO THE LOCAL BUILDING CODES AND/OR THE LATEST RESIDENTIAL BUILDING CODE AS APPLICABLE.
2. THE CONTRACTOR SHALL REPORT TO THE ARCHITECT AND THE ENGINEER ANY DISCREPANCIES BETWEEN THE STRUCTURAL DRAWINGS AND THE ARCHITECTURAL, CIVIL, MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS, AS WELL AS WITH EXISTING SITE CONDITIONS BEFORE BEGINNING CONSTRUCTION.
3. THE CONTRACTOR SHALL WORK TO THE DIMENSIONS SHOWN ON THE DRAWINGS - DO NOT SCALE.
4. THE CONTRACTOR SHALL NOTIFY THE ENGINEER IF THERE ARE ANY QUESTIONS REGARDING THE STRUCTURAL COMPONENTS, OR IF THERE ARE ANY REQUIRED DIMENSIONS THAT ARE NOT SHOWN ON THESE DRAWINGS.
5. PROVIDE DETAILS SIMILAR TO THOSE SHOWN ON THESE DRAWINGS WHERE NO SPECIFIC DETAIL IS GIVEN, AND NOTIFY THE ENGINEER WHERE THESE SIMILAR DETAILS OCCUR.
6. THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS OF PRE-ENGINEERED WOOD TRUSSES TO ENGINEER FOR REVIEW AND CORRECTION NO LESS THAN (10) BUSINESS DAYS PRIOR TO BEGINNING FABRICATION.
7. THE CONTRACTOR SHALL REVIEW AND CORRECT SHOP DRAWING SUBMITTALS FOR COMPLIANCE WITH CONTRACT DOCUMENT REQUIREMENTS PRIOR TO SUBMITTING THESE DRAWINGS FOR STRUCTURAL ENGINEER REVIEW.
8. TRUSS SHOP DRAWINGS SHOW FINAL DESIGN HOLD-DOWN REQUIREMENTS WHICH ARE UNAVAILABLE TO ENGINEER DURING CONTRACT DOCUMENT PREPARATION. STRAPPING AND HOLD-DOWNS SHOWN ON THESE DRAWINGS MAY NEED TO BE MODIFIED AND/OR ADDITIONAL STRAPPING MAY BE REQUIRED AFTER ENGINEER REVIEW OF THESE TRUSS SHOP DRAWINGS. TIMELY SUBMITTAL OF SHOP DRAWINGS TO THE ENGINEER, THEREFORE, IS CRITICAL TO THE PROJECT SCHEDULE.
9. THE METHOD, MEANS, PROCEDURES, TECHNIQUES, AND SEQUENCING OF SHORING, BRACING, FORMWORK, AND SUPPORTING STRUCTURES DURING CONSTRUCTION ARE NOT DEFINED IN THESE DRAWINGS, AND ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
10. DEVELOPMENT AND IMPLEMENTATION OF JOBSITE SAFETY AND CONSTRUCTION PROCEDURES ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.

1. CONSTRUCTION INSPECTIONS SHALL BE MADE BY THE OFFICE OF THE ENGINEER OF RECORD AS SHOWN ON THE SCHEDULE BELOW:
 - 1.1. FOOTING STEEL INSPECTION PRIOR TO CONCRETE PLACEMENT
 - 1.2. SLAB REINFORCEMENT INSPECTION PRIOR TO CONCRETE PLACEMENT
 - 1.3. EXTERIOR FRAMING INSPECTION PRIOR TO SHEATHING INSTALLATION
 - 1.4. EXTERIOR SHEATHING AND SHEAR WALL INSPECTION PRIOR TO EXTERIOR FRAMING AND HOLD DOWN INSPECTION PRIOR TO INSTALLATION OF INSULATION
2. CONTRACTOR SHALL NOTIFY THE OFFICE OF THE ENGINEER OF RECORD FOR THE INSPECTIONS NOTED ABOVE AT LEAST 24 HOURS IN ADVANCE OF COVERING INSPECTED ITEMS.

1. SOIL TESTING SHALL BE PROVIDED BY LICENSED PROFESSIONAL TO IDENTIFY SOIL COMPOSITION, DRAINAGE PROPERTIES, ALLOWABLE STRESS AND OTHER PROPERTIES AS DEEMED NECESSARY BY THE DESIGN PROFESSIONAL. THE LOCAL BUILDING OFFICIAL OR ENGINEER OF RECORD MAY WAIVE THIS REQUIREMENT WITH APPROPRIATE DATA AS PER THE LOCAL BUILDING CODES.

2. SOIL TESTING IS REQUIRED WHERE EXPANSIVE SOIL OR SOIL ESTIMATED TO EXCEED THE MINIMUMS DESCRIBED IN CHAPTER 18 OF THE LATEST EDITION OF THE FLORIDA BUILDING CODE.

3. SOIL TESTING SHALL BE DEEP FOUNDATION IS PROPOSED FOR SUPPORTING THE STRUCTURE. TESTING SHALL INCLUDE AT A MINIMUM: PILING TYPE, SPACING, DRIVING METHOD, INSTALLATION, INSPECTIONS, TESTING, SUITABILITY, BEARING DESIGNATION AND BEARING CAPACITIES.

4. GROUND ADJACENT TO FOUNDATION SHALL BE SLOPED AWAY FROM STRUCTURE MIN. 5% FOR 10FT AWAY FROM STRUCTURE.

5. THE FOUNDATION AND THE AREA ENCOMPASSED WITHIN 1 FOOT THEREIN SHALL HAVE ALL VEGETATION, STUMPS, DEAD ROOTS, CARDBOARD, TRASH, AND FOREIGN MATERIAL REMOVED AND THE FILL MATERIAL SHALL BE FREE OF VEGETATION AND FOREIGN MATERIAL.

6. AFTER ALL WORK IS COMPLETED, LOOSE WOOD AND DEBRIS SHALL BE COMPLETELY REMOVED FROM UNDER THE BUILDING AND WITHIN 1 FOOT (305 MM) THEREOF. ALL WOOD FORMS AND FORMWORK SHALL BE COMPLETELY REMOVED TO UNWOUND GRADE STAKES, FORMS, CONTRACTION SPACERS, TIE TRAP BARS, PLUMBING SUPPORTS, BRACING, SHORING, FORMS OR OTHER CELLULOSE-CONTAINING MATERIAL PLACED IN ANY LOCATION WHERE SUCH MATERIALS ARE NOT CLEARLY VISIBLE AND READILY REMOVABLE PRIOR TO COMPLETION OF THE WORK. WOOD SHALL NOT BE STORED IN CONTACT WITH THE GROUND UNDER ANY BUILDING.

CONCRETE

1. DESIGN OF THE STRUCTURES DEFINED ON THESE DRAWINGS IS BASED UPON AN ASSUMED SOIL BEARING PRESSURE OF 2,000 PSF MINIMUM.
2. FOOTINGS AND SLABS SHALL BEAR ON SOLID, UNDISTURBED EARTH, OR CONTROLLED AND COMPACTED STRUCTURAL FILL WITH A SOIL BEARING CAPACITY OF 2,000 PSF.
3. CONTRACTOR SHALL BACKFILL BEHIND ALL RETAINING WALLS WITH FREE-DRAINING GRANULAR FILL.
4. CONCRETE FOR ALL FOUNDATIONS AND SLAB SHALL BE OF NORMAL WEIGHT, AND HAVE A COMPRESSIVE STRENGTH OF NO LESS THAN 2,500 PSI AT 28 DAYS UNLESS OTHERWISE SPECIFIED.
5. FOOTING AND SLAB REINFORCING STEEL SHALL BE GRADE 60 (60,000 PSI YIELD STRENGTH) AND CONFORM TO ASTM #61. WELDED WIRE FABRIC, IF USED, SHALL CONFORM TO ASTM A-185, AND SHALL BE PROVIDED IN FLAT SHEETS, NOT ROLLS.
6. PROVIDE 3" COVER MINIMUM ON ALL REINFORCING STEEL WHERE FOUNDATION CONCRETE IS POURED DIRECTLY AGAINST EARTH. PROVIDE 1.5" COVER MINIMUM WHERE FOUNDATION CONCRETE IS POURED AGAINST FORMWORK FOR #5 BARS AND SMALLER, 2" FOR GREATER. IN NO CASE SHALL REINFORCING STEEL HAVE LESS THAN 3/4" COVERAGE IN ANY CURVATURE.
7. FOUNDATION WALLS SHALL BE NOT LESS THAN THE WIDTH OF THE WALL SUPPORTING ABOVE.
8. FOR GRADED LOTS, THE FINISH SLAB ELEVATION SHALL BE A MINIMUM OF 12 INCHES ABOVE THE GUTTER OF THE ACCESSING ROAD, UNLESS NOTED OTHERWISE.
9. FOOTINGS SHALL BE STEPPED WHERE NECESSARY. BOTTOM SURFACE SLOPE SHALL BE 10% MAX.
10. GLASS FIBRE-REINFORCED CONCRETE (GFRF) AND THE MATERIALS USED IN SUCH SHALL BE IN ACCORDANCE WITH THE PCI MNL 128 STANDARD.
11. INSULATING CONCRETE FORM (ICF) MATERIAL USED FOR FORMING FLAT CONCRETE WALLS SHALL CONFORM TO ASTM E2835.
12. FIBER MESH REINFORCING: FIBER LENGTH SHALL BE 1/2-INCH TO 2.25 INCHES IN LENGTH. DOSAGE AMOUNTS SHALL BE FROM 0.75 TO 3.0 POUNDS PER CUBIC YARD IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. SYNTHETIC FIBERS SHALL COMPLY WITH ASTM C1116.
13. W/M REINFORCING: 6x6-W14 XW14 WELDED WIRE FABRIC IN THE MIDDLE TO THE UPPER ONE-THIRD OF THE SLAB. SUPPORT WITH APPROVED SUPPORTS AT SPACING OF 3 FEET OR LESS. W/M SHALL CONFORM TO ASTM A1064/A1064M CARBON-STEEL WIRE AND WELDED WIRE REINFORCEMENT, PLAIN AND DEFORMED, FOR CONCRETE.

STUDS SHALL BE NOT LESS THAN NOMINAL 2 x4 FOR EXTERIOR WALLS OR 2 x 4 FOR INTERIOR BEARING OR LOAD RESISTING WALLS UNLESS NOTED OTHERWISE. SPACING SHALL BE NO LESS THAN 16" ON CENTER.

2. BASE PLATE OF BEARING WALL OVER JOISTS PERPENDICULAR TO THE WALL SHALL BE DOUBLED.

3. TOP PLATE OF BEARING WALL SHALL BE DOUBLED AND LAPPED AT EACH INTERSECTION OF WALLS, PARTITIONS; 48" MIN. LAP LENGTH.

4. FRAMING LUMBER USED FOR JOISTS, RAFTERS, TRUSSES, COLUMNS, BEAMS AND/OR OTHER STRUCTURAL MEMBERS SHALL BE OF NO LESS STRENGTH THAN NO. 2 GRADE OF SOUTHERN PINE, DOUGLAS FIR-LARCH, HEM-FIR OR SPRUCE-PINE-FIR.

5. LUMBER USED FOR STUDS IN EXTERIOR WALLS AND INTERIOR BEARING WALLS SHALL BE OF NO LESS STRENGTH THAN STUD GRADE OF THE FOLLOWING: SOUTHERN PINE, DOUGLAS FIR-LARCH, HEM-FIR OR SPRUCE-PINE-FIR.

6. STUDS SHALL NOT BE NOTCHED, WHERE VERTICAL PIPE POSITIONS REQUIRE, NOTCHES SHALL INCLUDE A METAL TE NOT LESS THAN 1" BY 18" ON EACH SIDE OF PLATE ACROSS OPENING WITH TWO 160 NAILS AT EACH END.

7. ALL STRUCTURAL LVL AND PARALLAM BEAMS SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES:

	2,900 PSI
BENDING STRENGTH	
SHEAR STRENGTH	285 PSI
COMP. STRENGTH PARALLEL TO GRAIN	2,600 PSI
MODULUS OF ELASTICITY	2,000,000 PSI

8. PANEL SHEATHING SHALL BE APA RATED SHEATHING BEARING THE TRADEMARK AS SHOWN IN THIS SECTION. SHEATHING PERMANENTLY EXPOSED TO WEATHER OR CONCRETE SHALL BE EXTERIOR GRADE. PROVIDE MIN. SHEATHING THICKNESS AS FOLLOWS:

ROOF	7/16" NOMINAL
WALLS & CEILING	7/16" NOMINAL
SUBFLOORS	3/4" NOMINAL

9. ROOF PANELS SHALL BE NAILED WITH 80 CORN NAIL PLACED AT 6" O.C. AT PANEL EDGES, AND 8" O.C. AT INTERMEDIATE SUPPORTS, TONGUES FACED UP ALONG SLOPED ROOFS AND ACROSS THREE SPANS.

10. WALL PANELS SHALL BE NAILED WITH 80 COMMON NAILS PLACED AT 6" O.C. AT PANEL EDGES, 6" O.C. AT INTERMEDIATE SUPPORTS, AND 4" AT EDGE SUPPORTS.

11. EXTERIOR WOOD FRAMING MEMBERS IN CONTACT WITH GROUND SHALL BE 0.25 CCA PRESSURE TREATED.

12. WOOD FRAMING MEMBERS EXPOSED TO WEATHER OR IN DIRECT CONTACT WITH CONCRETE OR MASONRY SHALL BE ACP PRESSURE TREATED.

13. USP OR QUICKTIE CONNECTORS MAY BE SUBSTITUTED FOR SIMPSON CONNECTORS WHERE SPECIFIED OR APPROVED ARE EQUAL OR GREATER.

14. ALL ROOF TRUSSES SHALL BE STRAPPED TO TOP PLATE AT BEARING LOCATIONS. REFER TO DRAWING DETAILS FOR SPECIFIC OR TYPICAL STRAPPING REQUIREMENTS.

1. FRAME STRAPPING SHALL BE EQUIVALENT OR EQUAL TO AS SHOWN IN DETAILS. SUBSTITUTIONS SHALL BE COORDINATED WITH ENGINEER.
2. STRAPS SHALL BE APPROVED UNDER THE CRITERIA SET BY THE CERTIFICATION AGENCY AND/ OR MANUFACTURER PRODUCT INFORMATION.

***Framing at adjoining panel edges shall be 3 inches nominal or wider, and nails at panel edges shall be staggered where panel edge nailing is specified at 2 inches on center or less.
***Framing at adjoining panel edges shall be 3 inches nominal or wider, and nails at all panel edges shall be staggered where both of the following conditions are met: (1) 10d (3" x 0.148") nails having penetration into framing of more than 1-1/2" and (2) panel edge nailing is specified at 3 inches on center or less.
***Shear wall shall be anchored to foundation @ 32" o.c. w/ embedded anchor bolts in concrete footing, or thru bolts in wood girder as applicable.

MASONRY

1. ALL CONCRETE MASONRY UNIT (CMU) STRUCTURES SHALL HAVE A COMPRESSIVE STRENGTH OF 1,500 PSI, AND CONFORM TO ASTM C90.
2. MORTAR FOR CMU STRUCTURES SHALL CONFORM TO ASTM C270, TYPE M OR TYPE S.
3. CONCRETE SHALL CONFORM TO ASTM C476 AND HAVE A MINIMUM STRENGTH OF 2,500 PSI AT 28 DAYS, SLUMP SHALL BE BETWEEN 7 AND 10 INCHES.
4. ALL CONCRETE FILL SHALL HAVE COARSE AGGREGATE OF A MAXIMUM SIZE OF 3/8". VERTICAL ALIGNMENT OF CELLS TO BE CLEAR, UNOBSTRUCTED, CONTINUOUS AND VERTICAL VOID SHALL BE 3" x 3" MIN. CONCRETE IN CELLS SHALL BE MECHANICALLY VIBRATED UPON BEING POURED TO PREVENT VOIDS. CELLS SHALL BE FILLED AT A MAXIMUM LIFT HEIGHT OF 4 FEET.
5. GROUT ALL CELLS UNLESS OTHERWISE SPECIFIED. STOP POUR AT 1'-1 1/2" BELOW THE TOP OF THE CELLS AT EACH LIFT TO FORM A KEY AT FOUR POINTS, KEY TO TERMINATE MIN. 1.5" BELOW MORTAR JOINT, AVOID KEYS WITHIN BOND BEAM COURSES.
6. LADDER TYPE HORIZONTAL JOINT REINFORCEMENT AT 16" O.C. SHALL BE PROVIDED FOR ALL CMU STRUCTURES OR AS NOTED OTHERWISE AND SHALL BE NO. 9-GAUGE LADDER-TYPE STAINLESS STEEL, HOT DIPPED GALVANIZED, OR EPOXY COATED IN ACCORDANCE WITH TMS 602 SECTION 2.4E1, 2.4F1B, OR 2.4F2A AS APPROPRIATE.
7. UNLESS OTHERWISE SPECIFIED, PLACE CONTROL JOINTS IN CMU WALLS AT A DISTANCE OF NO GREATER THAN 24'-0". CONTROL JOINTS SHALL NOT OCCUR AT WALL ENDS, INTERSECTIONS, CORNERS, JAMBS, OR OVER OPENINGS UNLESS SHOWN ON THE DRAWINGS.
8. PLACE #5 GRD. 60 BAR VERTICALLY IN CENTER OF CELLS AT ALL CORNERS, INTER-SECTIONS, WALL ENDS, JAMBS, ON EITHER SIDE OF CONTROL JOINTS, AND AT INTERVALS NOT TO EXCEED 40' O.C. UNLESS OTHERWISE SPECIFIED.


PRESSURE TREATED LUMBER & CONNECTORS

1. LUMBER EXPOSED TO WEATHER OR IN DIRECT CONTACT WITH CONCRETE OR MASONRY SHALL BE ACQ PRESSURE TREATED.
2. CONNECTORS, NAILS, SCREWS, BOLTS, TRUSS PLATES, AND ANCHOR PLATES IN CONTACT WITH ACQ PRESSURE TREATED LUMBER SHALL BE STAINLESS STEEL OR HOT-DIPPED GALVANIZED (PER CLASS G-185).

1. PRE-ENGINEERED FLOOR AND ROOF TRUSSES SHALL BE DESIGNED AND FABRICATED TO MEET ALL STRUCTURAL DESIGN CRITERIA AND WIND DESIGN PRESSURES SHOWN ON THIS SHEET.
2. TRUSS SUPPLIER SHALL SUBMIT SHOP DRAWINGS SIGNED AND SEALED BY A REGISTERED PROFESSIONAL ENGINEER FOR PROJECT ENGINEER REVIEW NO LESS THAN (10) BUSINESS DAYS BEFORE TRUSS FABRICATION IS SCHEDULED TO BEGIN.
3. TRUSS SUPPLIER SHALL MAKE NECESSARY CORRECTIONS TO THE TRUSS DESIGN AS DIRECTED BY THE CONTRACTOR AND THE ENGINEER OF RECORD PRIOR TO COMMENCING WITH FABRICATION.
4. TRUSS DESIGN SHALL COMPLY WITH ALL REQUIREMENTS OF THE ARCHITECT ALL CEILING AND BOTTOM CHORD REQUIREMENTS, AS WELL AS ALL PROVISIONS FOR MECHANICAL CHASES AND DUCTWORK, ELECTRICAL, AND PLUMBING REQUIREMENTS PRIOR TO FABRICATING TRUSSES.
5. PRE-ENGINEERED TRUSS MANUFACTURE SHALL PROVIDE SHOP DRAWINGS INCLUDING BUT NOT LIMITED TO:
 - 5.1. SLOPE OR DEPTH, SPAN AND SPACING.
 - 5.2. LOCATION OF ALL JOINTS AND SUPPORT LOCATIONS.
 - 5.3. NUMBER OF PILES IF GREATER THAN ONE.
 - 5.4. REQUIRED BEARING WIDTHS.
 - 5.5. DESIGN LOADS AS APPLICABLE, INCLUDING:
 - 5.5.1. TOP CHORD LIVE LOAD.
 - 5.5.2. TOP CHORD DEAD LOAD.
 - 5.5.3. BOTTOM CHORD LIVE LOAD.
 - 5.5.4. BOTTOM CHORD DEAD LOAD.
 - 5.5.5. ADDITIONAL LOADS AND LOCATIONS.
 - 5.5.6. ENVIRONMENTAL DESIGN CRITERIA AND SIGNED CONNECTIONS TO STRUCTURE.
 6. ADDITIONAL PRE-ENGINEERED WOOD TRUSS STRUCTURAL DESIGN MINIMUM CRITERIA:

ROOF TRUSS TOP CHORD LIVE LOAD	30 PSF
ROOF TRUSS TOP CHORD DEAD LOAD	15 PSF
ROOF TRUSS BOTTOM CHORD DEAD LOAD	10 PSF
FLOOR TRUSS TOP CHORD LIVE LOAD	40 PSF
FLOOR TRUSS TOP CHORD DEAD LOAD	15 PSF
FLOOR TRUSS BOTTOM CHORD DEAD LOAD	10 PSF

 FLOOR TRUSS MAX DEFLECTION = $L/960$ (TOTAL LOAD)
7. REQUIREMENTS SET FORTH IN THE LATEST EDITION OF THE LOCAL BUILDING CODE.

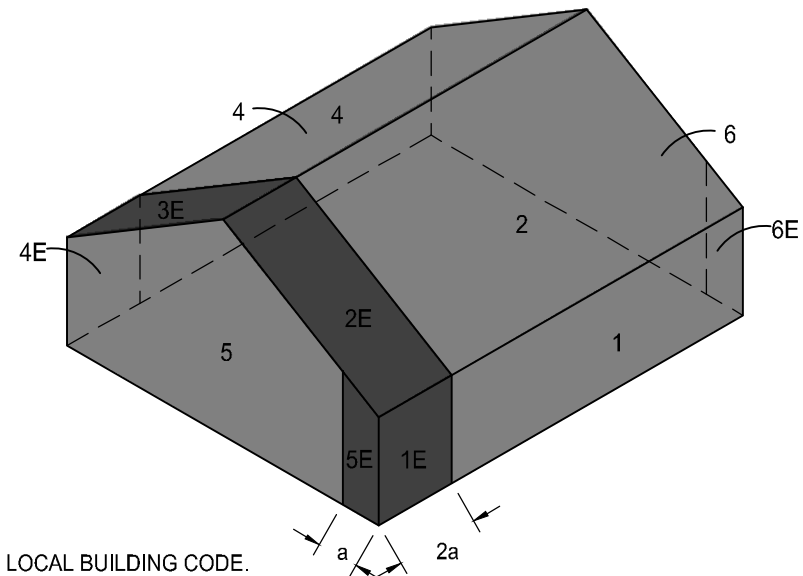

		Header schedule						
		Span of Supported Roof & Floor (ft)						
Opening Size (ft)	No. Jack Studs/King Studs	16	20	24	28	32	36	40
4	1/1	(1) 2 x 10	(1) 2 x 12	(1) 2 x 12	(1) 2 x 12	(2) 2 x 10s	(2) 2 x 10s	(2) 2 x 10s
6	2/2	(2) 2 x 10s	(2) 2 x 12s	(2) 2 x 12s	(3) 2 x 12s	(3) 2 x 10s	(3) 2 x 12s	(3) 2 x 12s
8	2/2	(3) 2 x 10s	(3) 2 x 12s	(3) 2 x 12s	(3) 2 x 12s	3-1/2 x 9-1/4	3-1/2 x 9-1/4	3-1/2 x 11-1/4
9	2/3	(3) 2 x 12s	3-1/2 x 9-1/4	3-1/2 x 9-1/4	3-1/2 x 9-1/4	3-1/2 x 11-1/4	3-1/2 x 11-1/4	3-1/2 x 11-1/4
10	3/3	3-1/2 x 9-1/4	3-1/2 x 9-1/4	3-1/2 x 11-1/4	3-1/2 x 9-1/4	3-1/2 x 11-1/4	3-1/2 x 11-1/4	3-1/2 x 11-7/8
12	3/3	3-1/2 x 11-1/4	3-1/2 x 11-1/4	3-1/2 x 11-7/8	3-1/2 x 11-1/4	3-1/2 x 11-1/4	5-1/2 x 11-7/8	5-1/2 x 11-7/8
16	3/3	3-1/2 x 14	3-1/2 x 16	5-1/2 x 14	5-1/2 x 14	5-1/2 x 16	5-1/2 x 16	5-1/2 x 16
18	3/3	3-1/2 x 16	3-1/2 x 18	5-1/2 x 16	5-1/2 x 16	5-1/2 x 18	5-1/2 x 18	5-1/2 x 18

*Header size is based on the load transferred from 1/2 the span of the supported roof framing plus a 24" overhang, plus 1/4 the span of the floor framing, plus the wall load.

**3-1/2" & 5-1/2" members shall have min. 4.5" bearing, all others min. 3" bearing

RAFTER SIZE	HORIZONTAL SPAN (24" O.C. SPACING)	HORIZONTAL SPAN (19.2" O.C. SPACING)	HORIZONTAL SPAN (16" O.C. SPACING)
2X6	0'-0" - 9'-2"	0'-0" - 10'-2"	0'-0" - 11'-2"
2X8	9'-2" - 11'-7"	10'-2" - 12'-11"	11'-2" - 14'-2"
2X10	11'-7" - 13'-9"	12'-11" - 15'-4"	14'-2" - 16'-10"
2X12	13'-9" - 16'-2"	15'-4" - 18'-1"	16'-10" - 19'-10"

A map of the state of Georgia, showing its county boundaries and names. The counties are labeled with their names, such as Spalding, DeKalb, Cobb, and others. A line points to a specific location in the southwestern part of the state, labeled 'PROJECT LOCATION'.

Standard: ASCE/SEI 7-22 **Latitude:** 30.92924
Risk Category: II **Longitude:** -83.347605
Soil Class: Default **Elevation:** 204.68801367600048 ft
 (NAVD 88)



```

DESIGN CODES:
INTERNATIONAL BUILDING CODE, 2018 EDITION, W/ GA ADMENDMENETS
INTERNATIONAL RESIDENTIAL CODE, 2018 EDITION, W/ GA ADMENDMENETS
INTERNATIONAL FIRE CODE, 2018 EDITION, W/ GA ADMENDMENETS
INTERNATIONAL PLUMBING CODE, 2018 EDITION, W/ GA ADMENDMENETS
INTERNATIONAL MECHANICAL CODE, 2018 EDITION, W/ GA ADMENDMENETS
INTERNATIONAL FUEL GAS CODE, 2018 EDITION, W/ GA ADMENDMENETS
INTERNATIONAL ELECTRICAL CODE, 2018 EDITION, W/ GA ADMENDMENETS
INTERNATIONAL ENERGY PSYR CODE, 2018 EDITION, W/ GA ADMENDMENETS
INTERNATIONAL POND AND SPA CODE, 2018 EDITION, W/ GA ADMENDMENETS
DESIGN LIVE LOADS:
LIVING AREAS          40 PSF
DECKS                  60 PSF
BALCONIES             60 PSF
ROOF                   20 PSF
DESIGN WIND LOADS:

```

Design Reference ASEC 7-22		
Address: 6000 Cuyattstone Road, Hahira, GA 31632		
Project No	130-23-004	
Design Wind Speed (rounded up to 5 mph)	120	mph
Exposure Category	B	
Building Type	Fully Enclosed	
Internal Pressure Coefficient	+/-0.18	Gcpi
Mean Roof Height	25	ft
Roof Pitch	7/12	in/ 12in
Velocity Pressure Coefficient	0.70	Kz
Ice	0.06	in
Snow	6	psf
Rain (15-min/ 60-min)	730/ 3.62	in

MAIN WIND FORCE RESISTING SYSTEM (MWFRS) ASEC 7-22														
Load Case	Roof Angle (deg)	Wind Direction	Building Pressure (PSF)											
			Location	1	2	3	4	1E	2E	3E	4E			
1	30.3	Windward	8.33	0.66	-13.38	-12.06	11.19	1.97	-15.57	-14.48				
		Leeward	16.23	8.55	-5.48	-4.17	19.08	9.87	-7.68	-6.58				
	30.3	Windward	-13.82	-11.08	-12.06	-13.82	4.83	-10.31	-14.48	-27.42	-15.57	-14.48	9.43	-13.38
		Leeward	-5.92	-19.19	-4.17	-5.92	12.72	-2.41	-6.58	-19.52	-7.68	-6.58	17.33	-5.48
3	30.3	Windward	1T	2T	3T	4T								
		Leeward	-0.88	-2.85	-6.36	-5.92								
	30.3	Windward	7.02	5.04	1.54	1.97								
		Leeward	5T	6T										
4	30.3	Windward	-1.75	-5.48										
		Leeward	6.14	2.41										

*Design wind pressure shall not be less than a net pressure of 16.00 PSF acting in either direction, where the absolute value included in this table is less than 16.00 PSF. the minimum building pressure of 16.00 PSF shall be assumed the design pressure

COMPONENTS & CLADDING (C&C) ASEC 7-22													
Load Case	Roof Angle (deg)		Building Pressure (PSF)										
			Area (SF)	1 (+)	1 (-)	2	2 (-)	3 (+)	3 (-)	1- (-)	1' (-)	All (+)	All (-)
Roof	30.3		10	-36.85	-28.95	-43.43	-35.53	-56.59	-48.69			11.41	19.30
			20	-29.17	-21.28	-32.46	-24.57	-47.82	-39.92			9.21	17.11
			50	-24.79	-16.89	-28.08	-20.18	-35.75	-27.86			5.92	13.82
			100	-19.30	-11.41	-21.50	-13.60	-25.88	-17.99			2.63	10.53
			200	-19.30	-11.41	-21.50	-13.60	-25.88	-17.99			2.63	10.53
			500	-19.30	-11.41	-21.50	-13.60	-25.88	-17.99			2.63	10.53
Overhang	15-30	Area (SF)	3 (+)	3 (-)	2	2 (-)	1 (+)	1 (-)					
			20	63.08	-35.53	39.92	-26.76	24.57	-15.79				
			100	39.92	-26.76	39.92	-26.76	24.57	-15.79				
	30-45		500	24.57	-15.79	24.57	-15.79	24.57	-15.79				
			20	44.31	-31.15	33.34	-22.37	20.18	-13.60				
			100	33.34	-22.37	33.34	-22.37	20.18	-13.60				
Walls	Vertical (45 to 90)		500	20.18	-13.60	20.18	-13.60	20.18	-13.60				
		Area (SF)	4 (+)	4 (-)	5 (+)	5 (-)	All (+)	All (-)					
			10	-28.08	-20.18	-34.66	-26.76	17.99	25.88				
			20	-26.98	-19.08	-32.46	-24.57	15.79	23.69				
			50	-24.79	-16.89	-29.17	-21.28	14.70	22.59				
			100	-23.69	-15.79	-26.98	-19.08	13.60	21.50				
		200	-22.59	-14.70	-23.69	-15.79	13.16	21.06					
		500	-21.50	-13.60	-21.50	-13.60	11.41	19.30					

*Design wind pressure shall not be less than a net pressure of 16.00 PSF acting in either direction, where the absolute value included in this table is less than 16.00 PSF; the minimum building pressure of 16.00 PSF shall be assumed the design pressure.



CLOVER-CSE LLC
FL# L21000519166
GA# 20127884
COSHEA@CLOVER-CSE.COM
(850) 750-1987

 Digitally signed by
Christopher OShwa, PE
DN: C=US,
E=coshwa@clover-cse.com,
O=Clover-CSE,
OU=Engineering, FL*,
CN=Christopher OShwa, P
Location: Lowndes County, GA
Reason: Certification
Contact: Christopher
OShwa, PE
Date: 2024.04.23
03:57:55-05'00'

OWNER AND/ OR CONTRACTOR IS
RESPONSIBLE FOR THE CONSTRUCTION PHASE
OF THIS PROJECT AND SHALL FOLLOW ALL
LOCAL AND NATIONAL BUILDING CODES AS
APPLICABLE.

D·R·HORTON
America's Builder

BALLANTYNE

RAI I ANTYPN SUBDIVISION

LAND LOT 38, DISTRICT 12
LOWNDES COUNTY
GEORGIA

ID	DATE	DESCRIPTION
0	01/30/24	PERMIT SET

--	--

PROJECT NO: 130-23-004

DESIGNED BY: CLO

DRAWN BY: JBM

CHECKED BY:

SHEET TITLE

STRUCTURAL GENERAL NOTES

SHEET NUMBER

S-001



RESULTS



BALLANTYNE

ECT LOCATION

LANTYNE SUBDIVISION

LYATTSTONE ROAD &
SIMPSON LANE

ND LOT 38, DISTRICT 12
LOWNDES COUNTY
GEORGIA

DISCUSSION

ECT NO: 130-23-004

SIGNED BY: CLO

OWN BY: JBM

CKED BY: CLO


ET TITLE

FOUNDATION & FRAMING PLANS


T NUMBER

S-BASE-VICTORIA-G.dwg




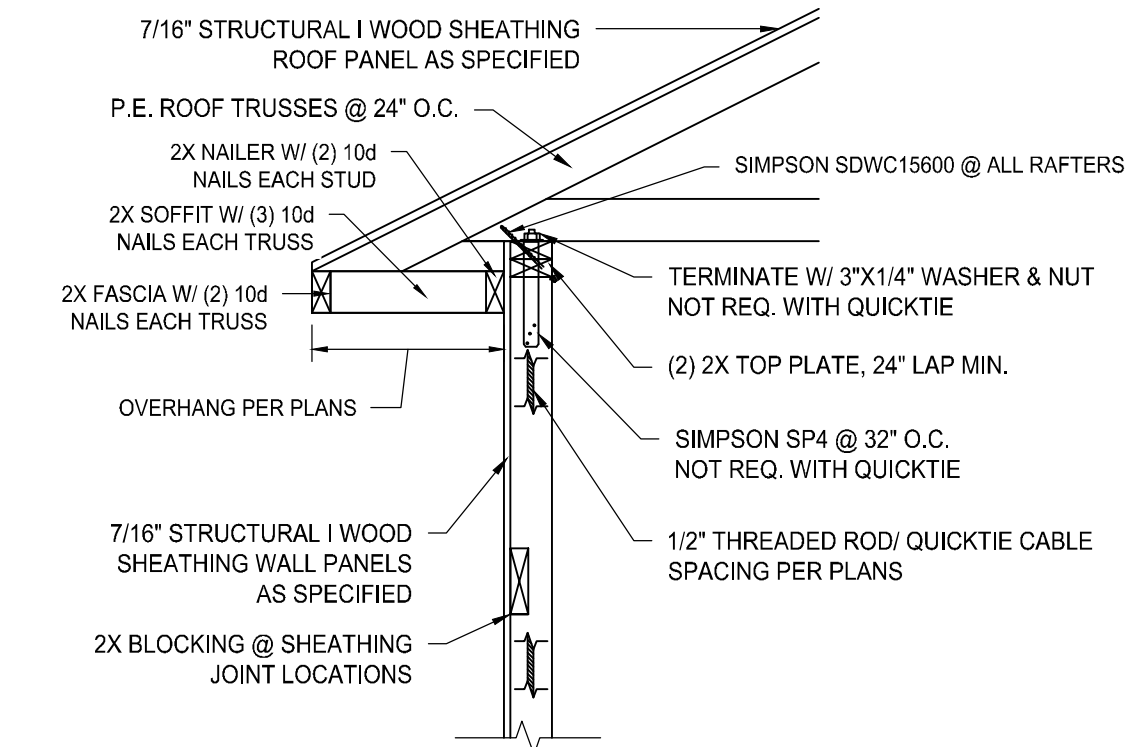


TYP EXTERIOR WALL AT ROOF
FULL SCALE: 3/4"=1'-0"

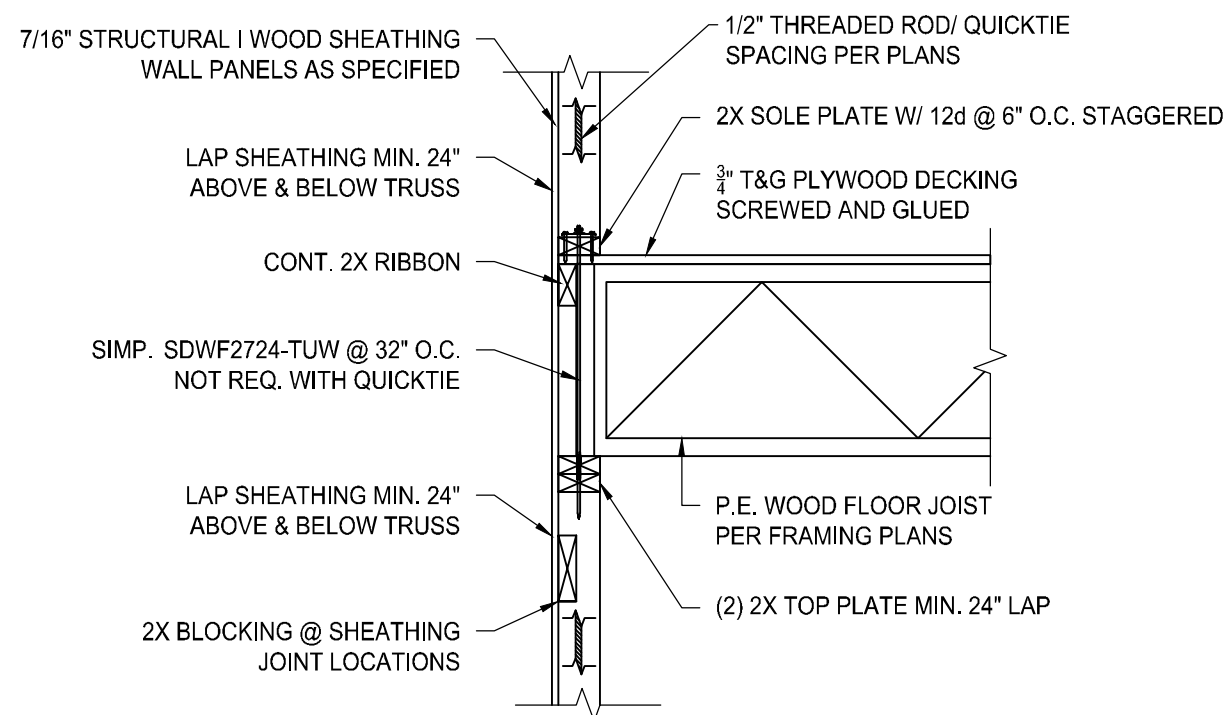


TYP EXTERIOR WALL AT FLOOR
FULL SCALE: 3/4"=1'-0"

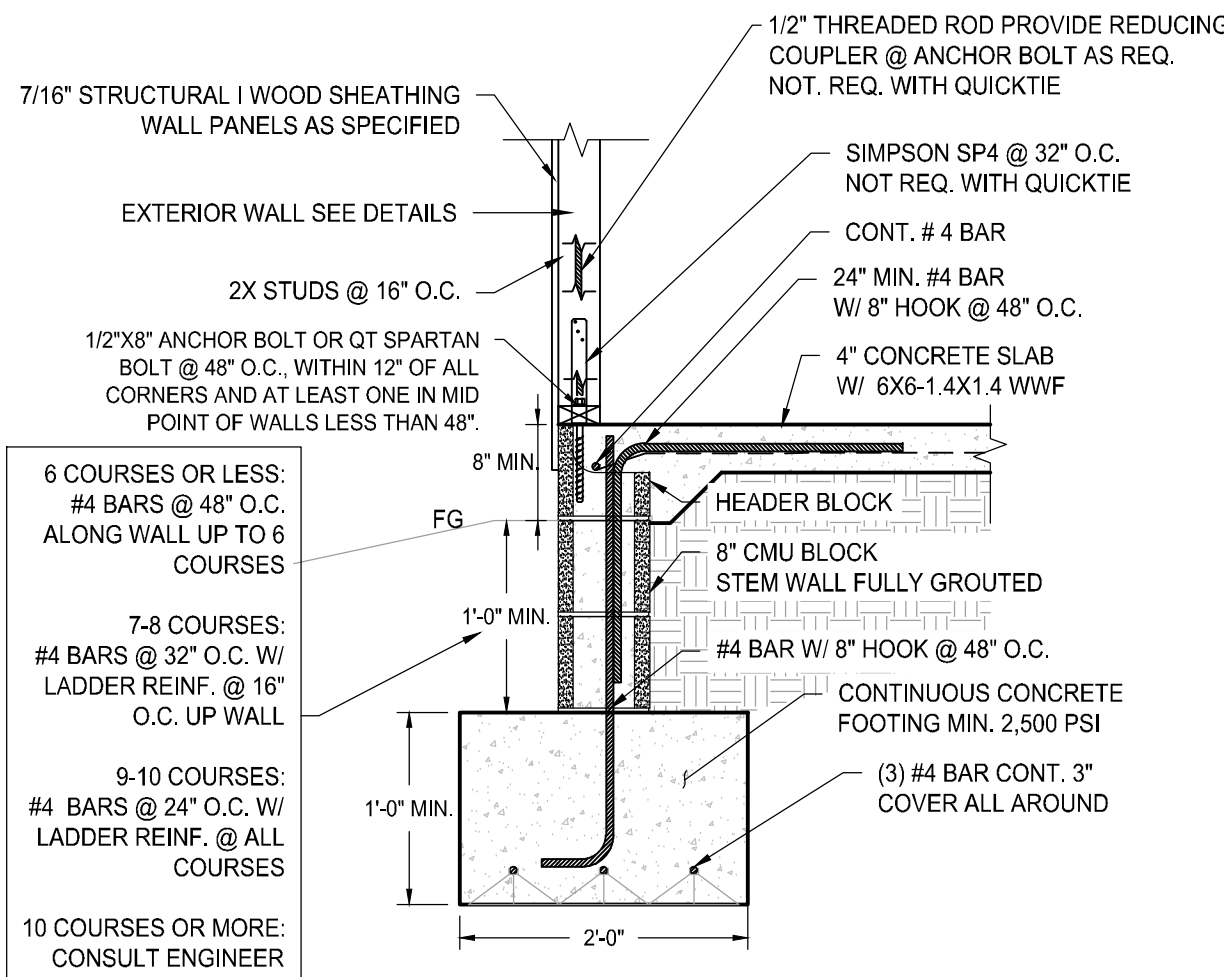


TYP EXTERIOR WALL STEM
FULL SCALE: 3/4"=1'-0"

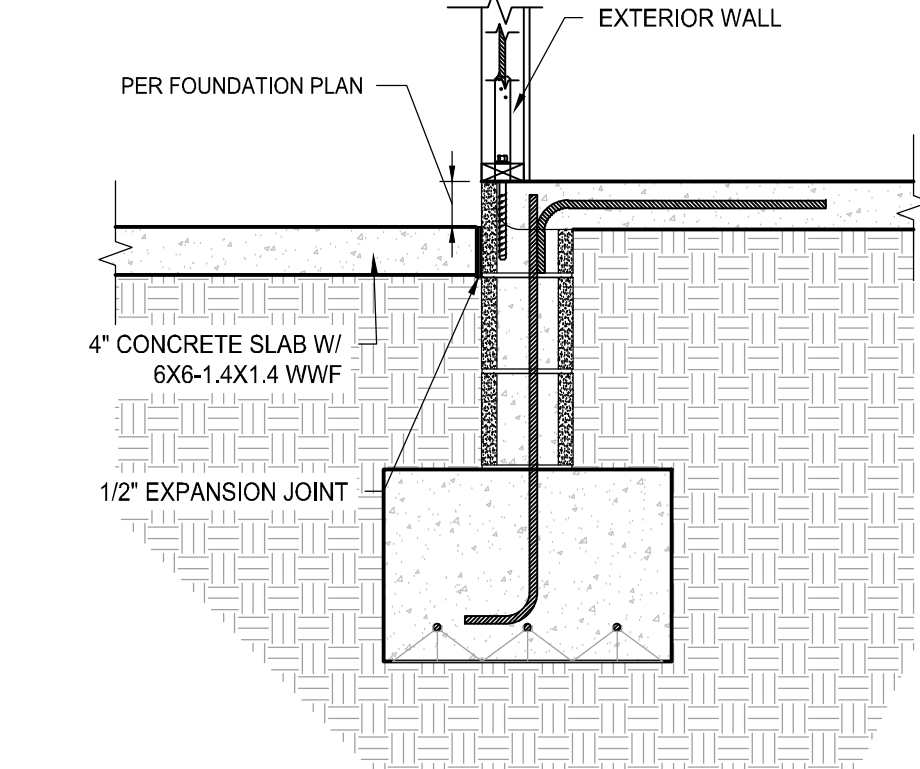


TYP SLAB TRANSITION @ STEM WALL
FULL SCALE: 3/4"=1'-0"

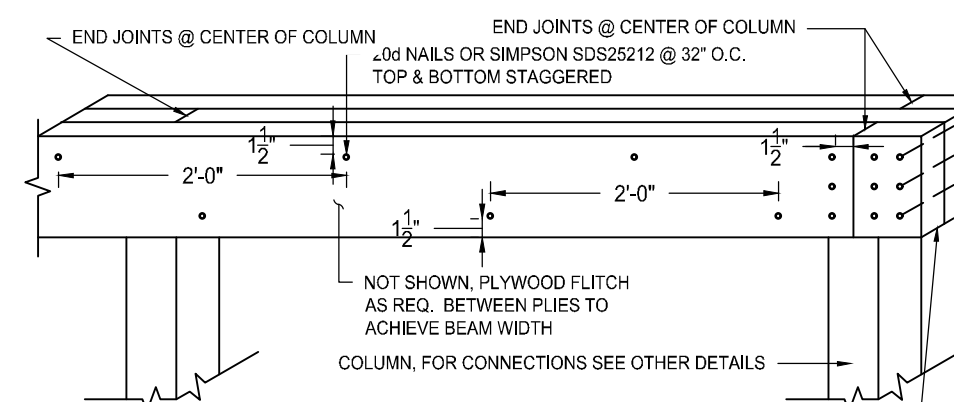


TYP MULTIPLE MEMBER BEAMS
SCALE: NOT TO SCALE

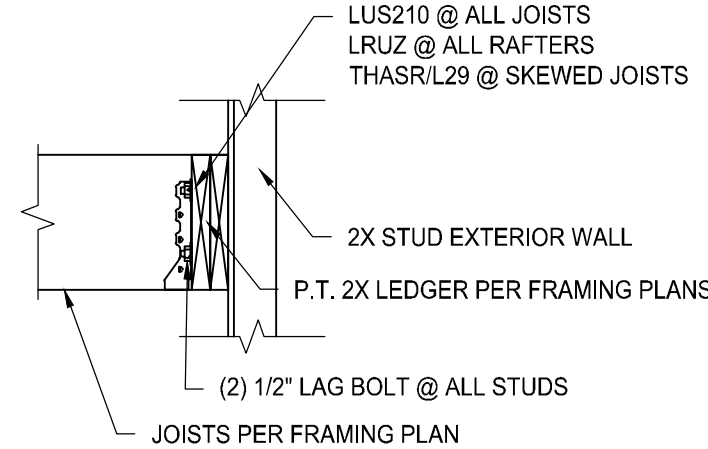


TYP LEDGER DETAIL @ WALL
FULL SCALE: 3/4"=1'-0"

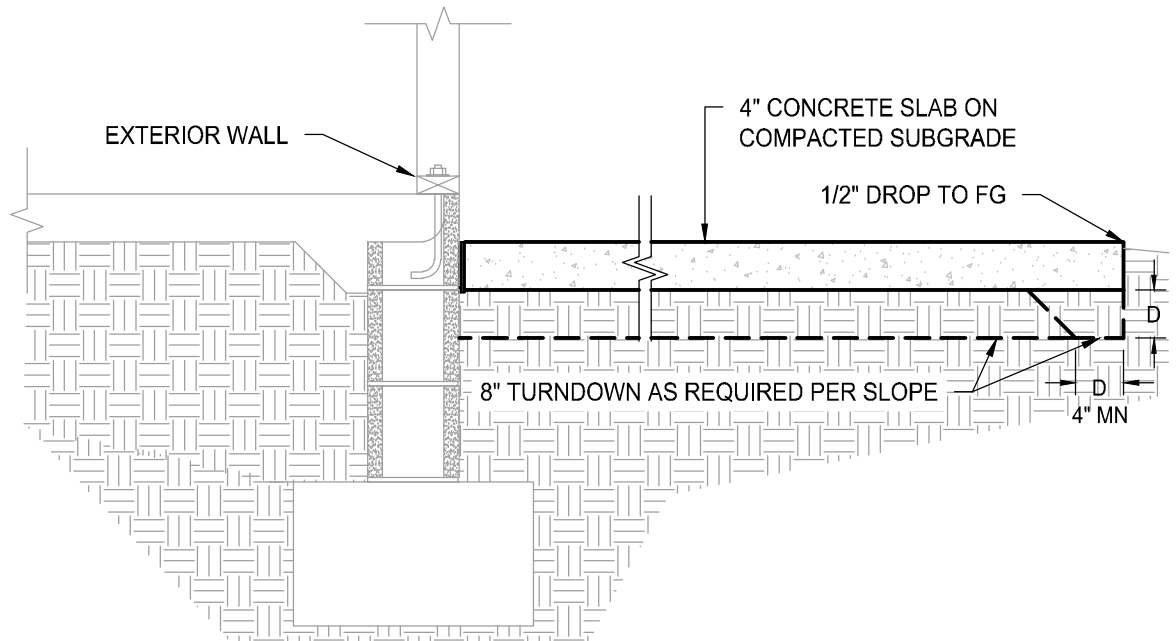


TYP TURN-DOWN SLAB
FULL SCALE: 3/4"=1'-0"

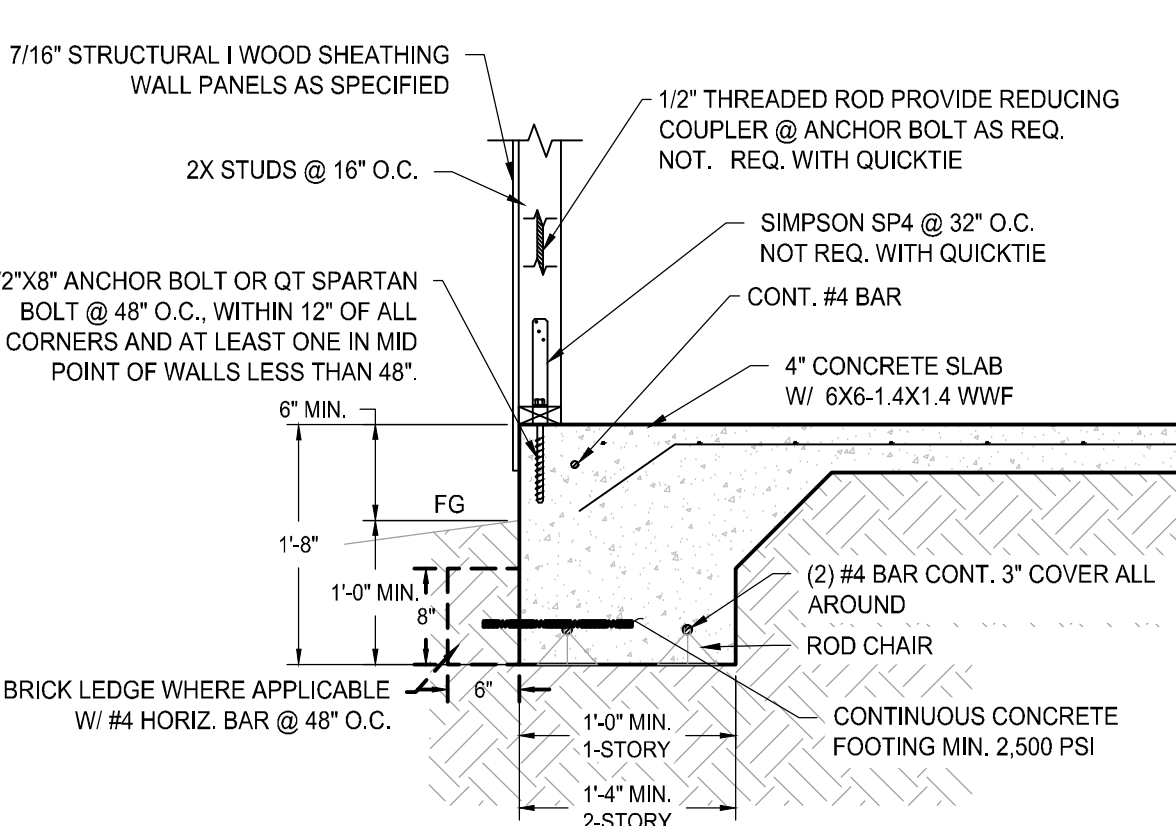


TYP EXTERIOR WALL MONO
FULL SCALE: 3/4"=1'-0"

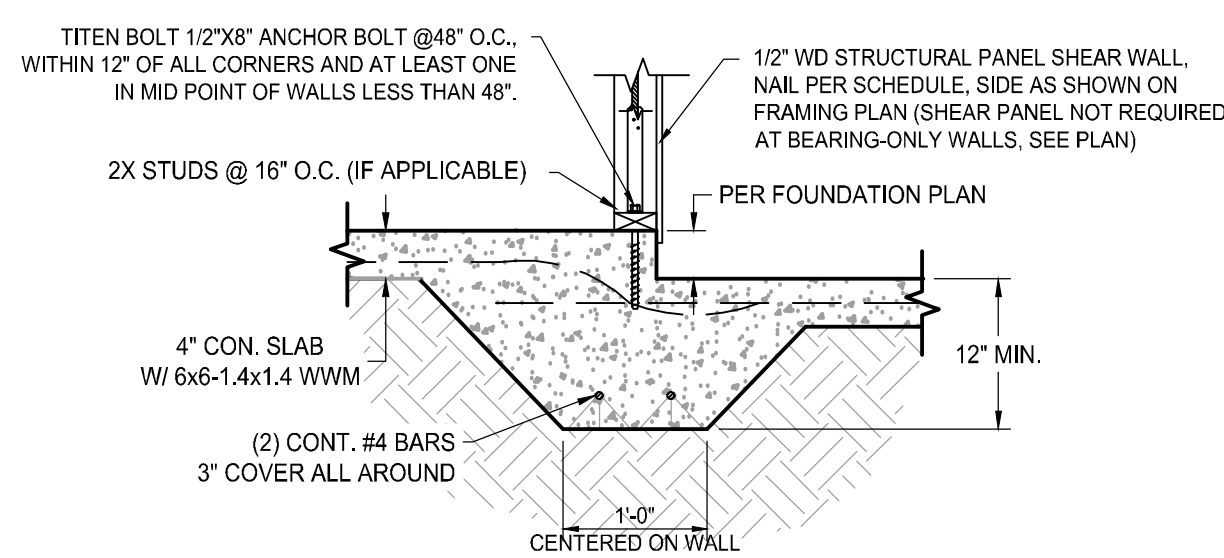


TYP SLAB TRANSITION GRADE BEAM
FULL SCALE: 3/4"=1'-0"

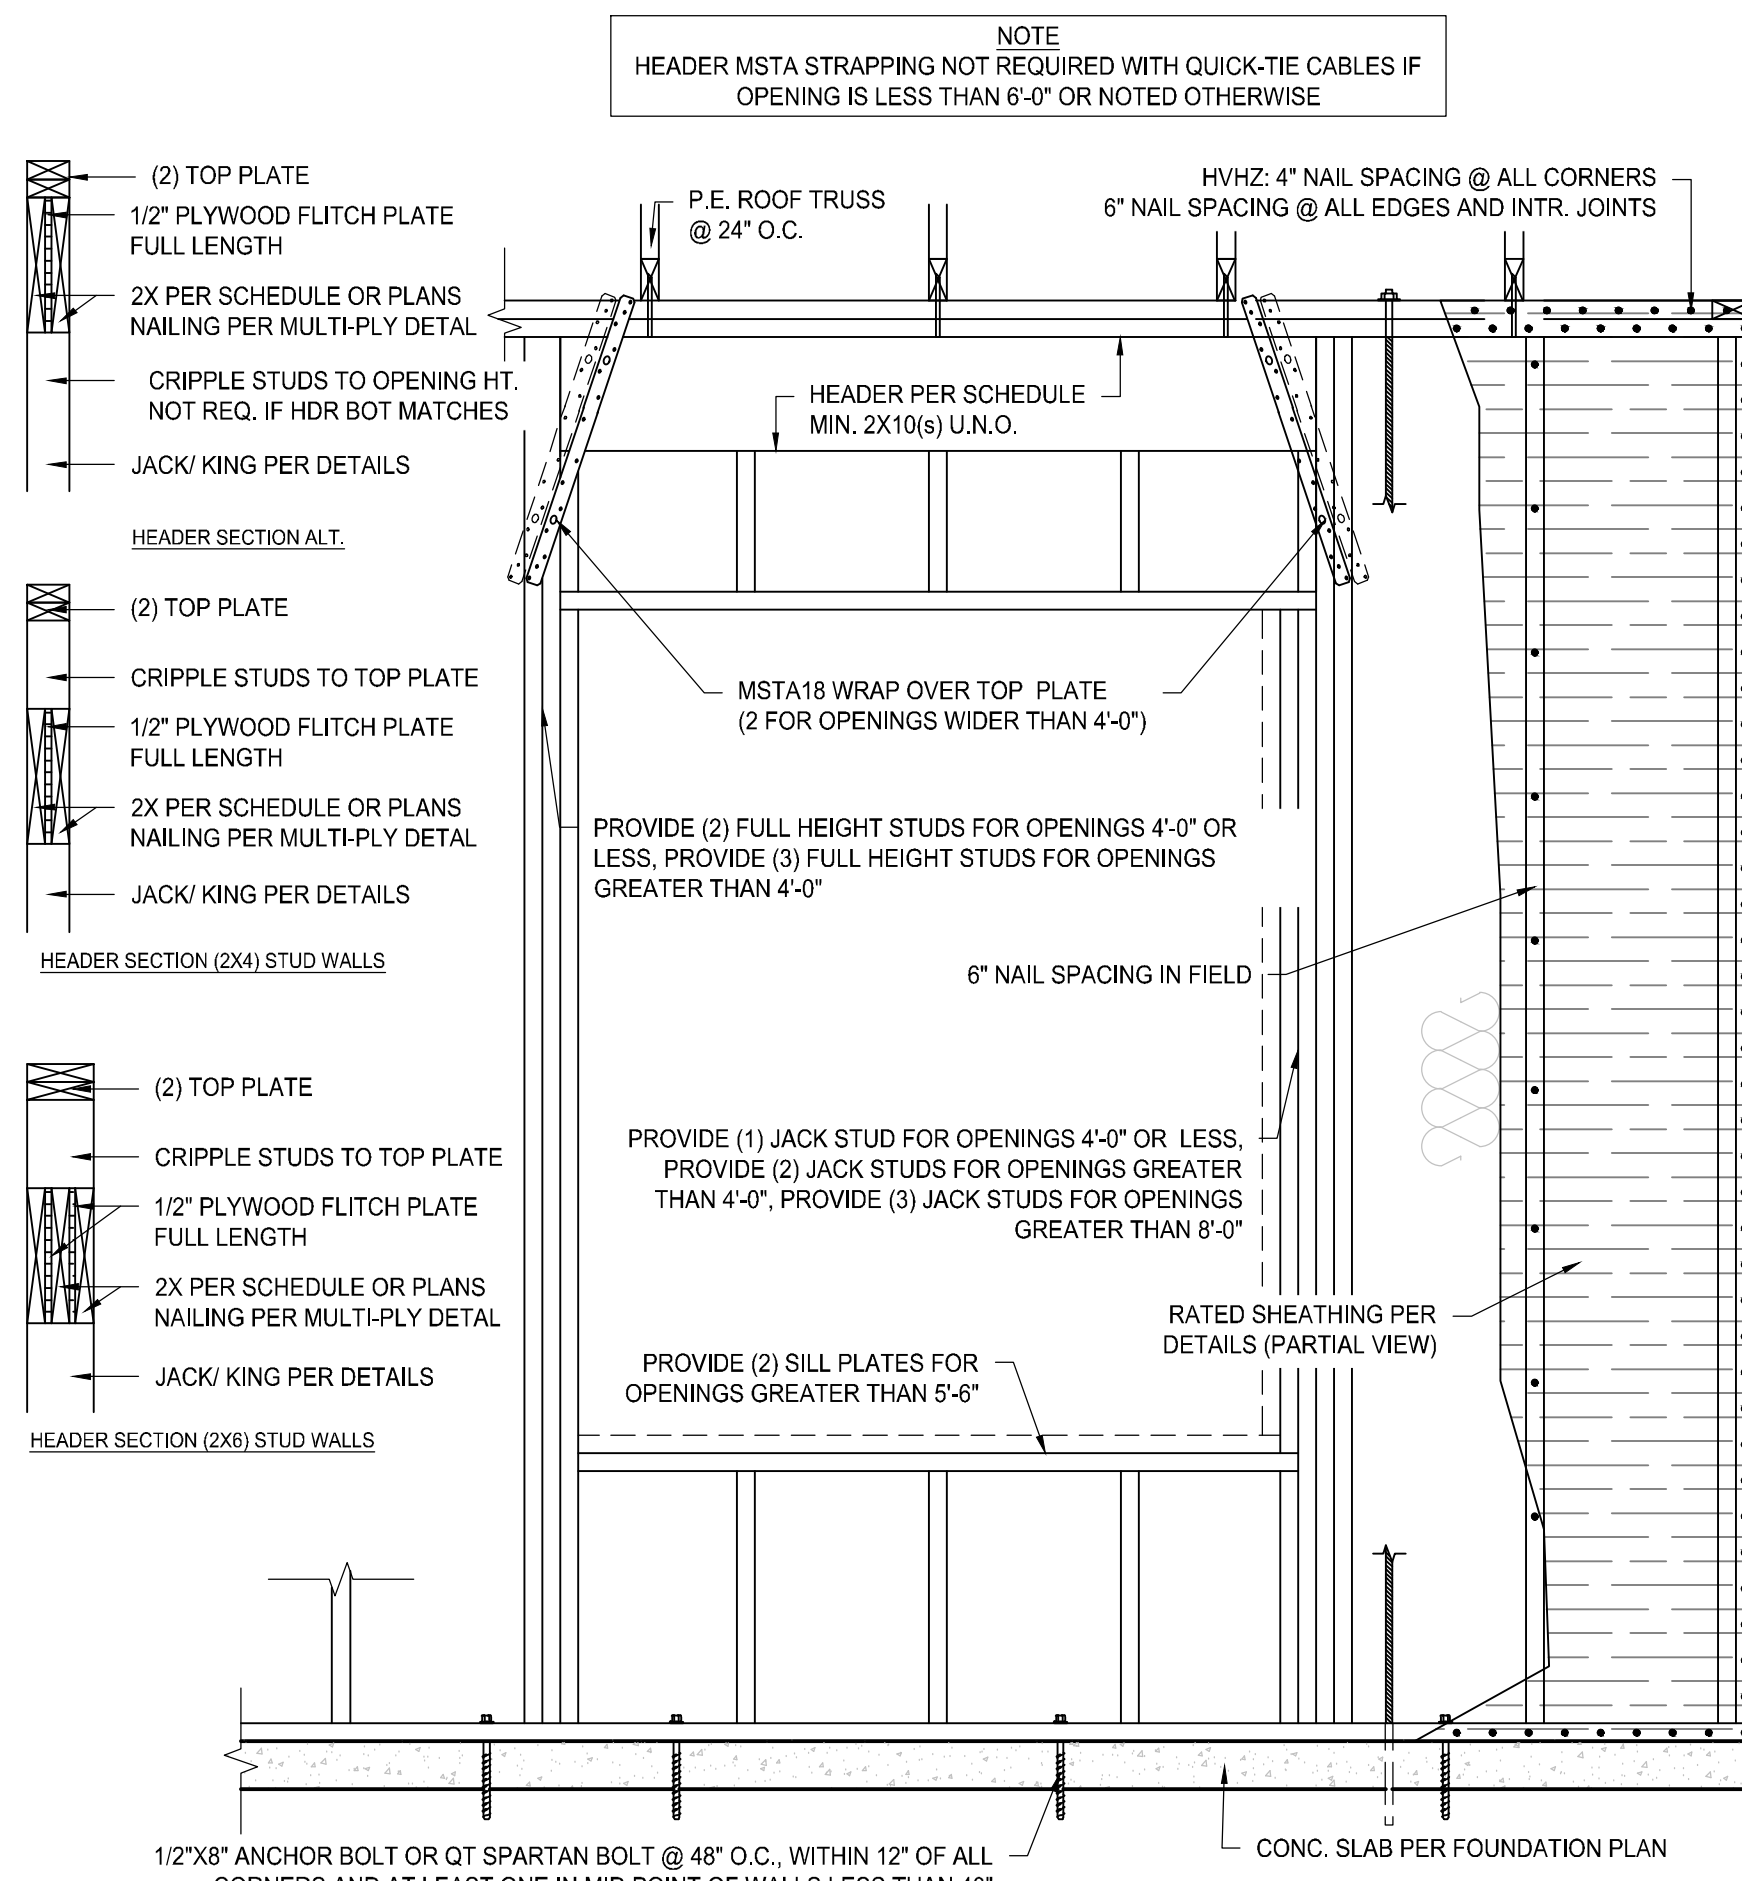


TYP OPENING, SHEATHING & HEADERS
FULL SCALE: 3/4"=1'-0"

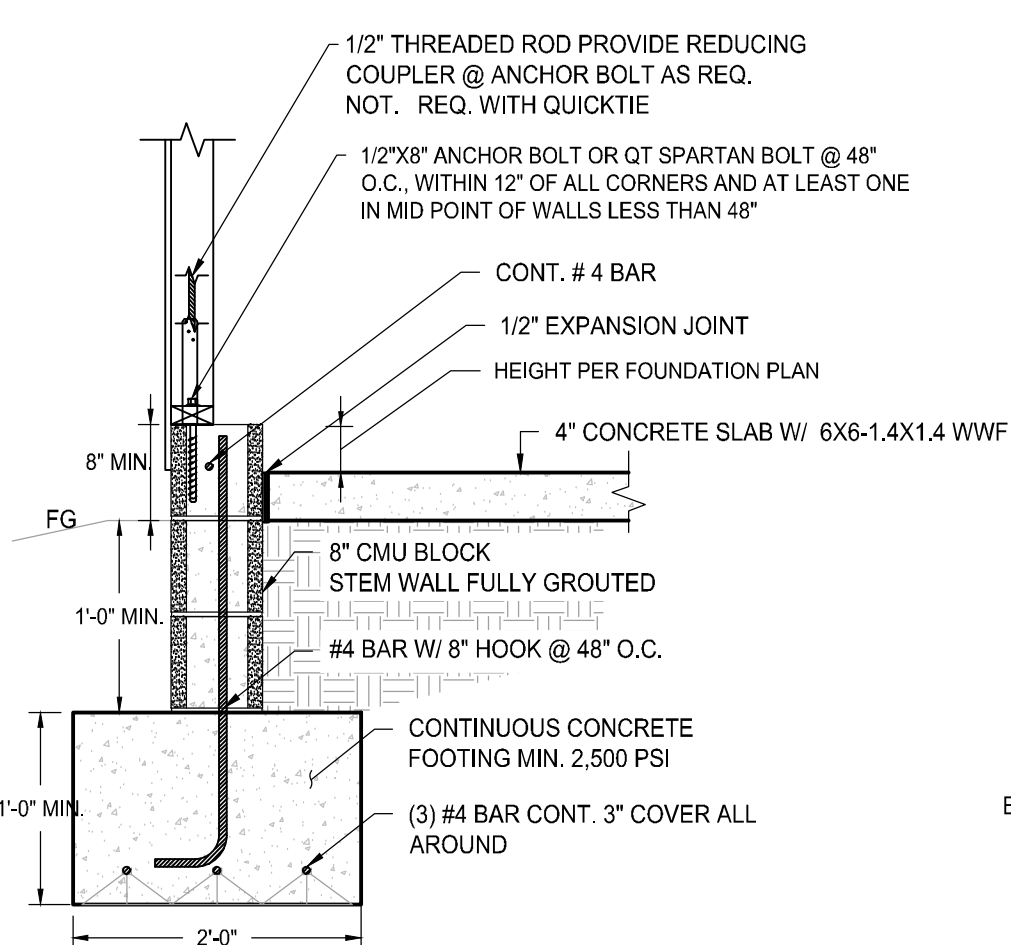


TYP EXTERIOR STEM WALL GARAGE
FULL SCALE: 3/4"=1'-0"

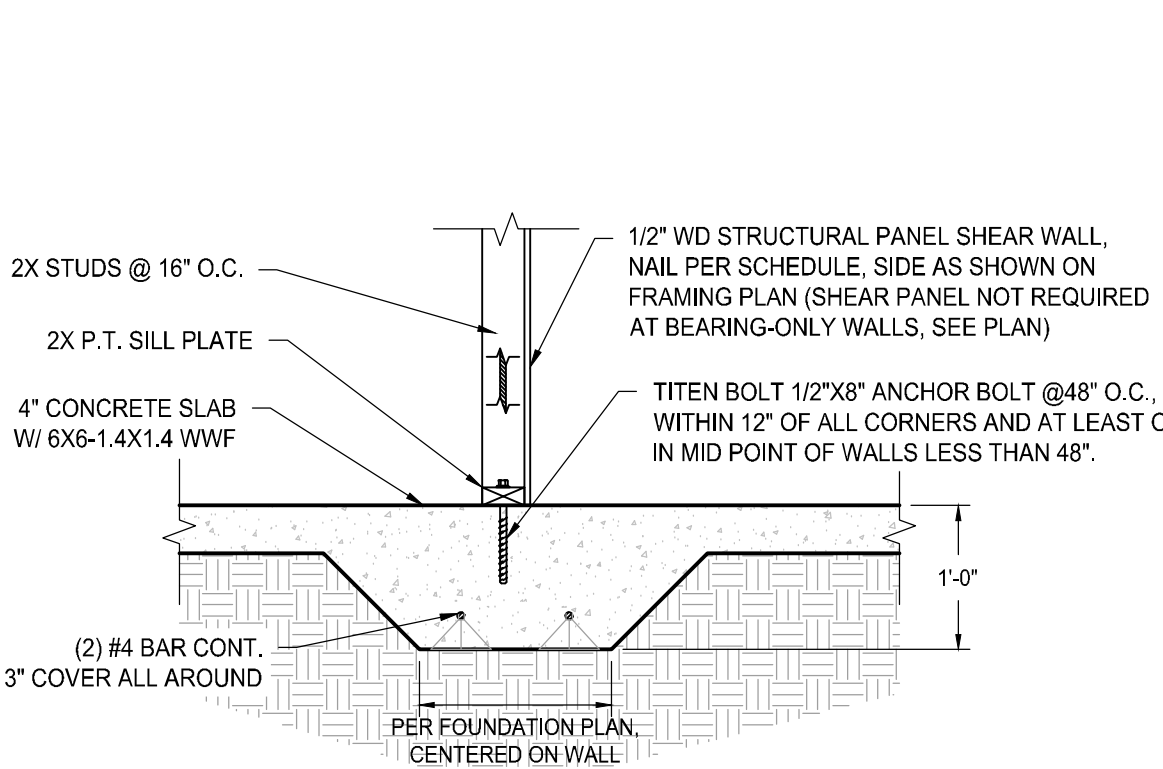


TYP BEARING/ SHEAR WALL GRADE BEAM
FULL SCALE: 3/4"=1'-0"

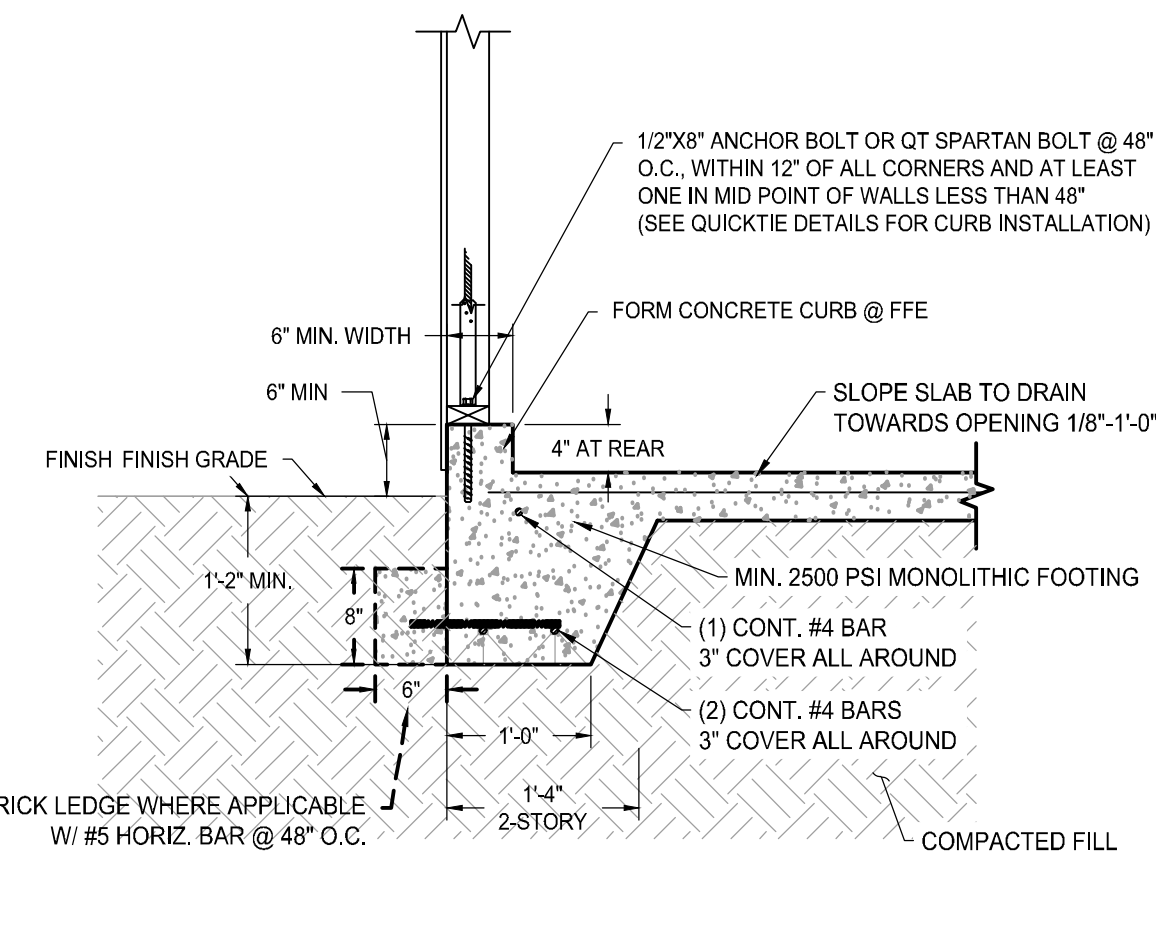


TYP EXTERIOR WALL MONO GARAGE
FULL SCALE: 3/4"=1'-0"

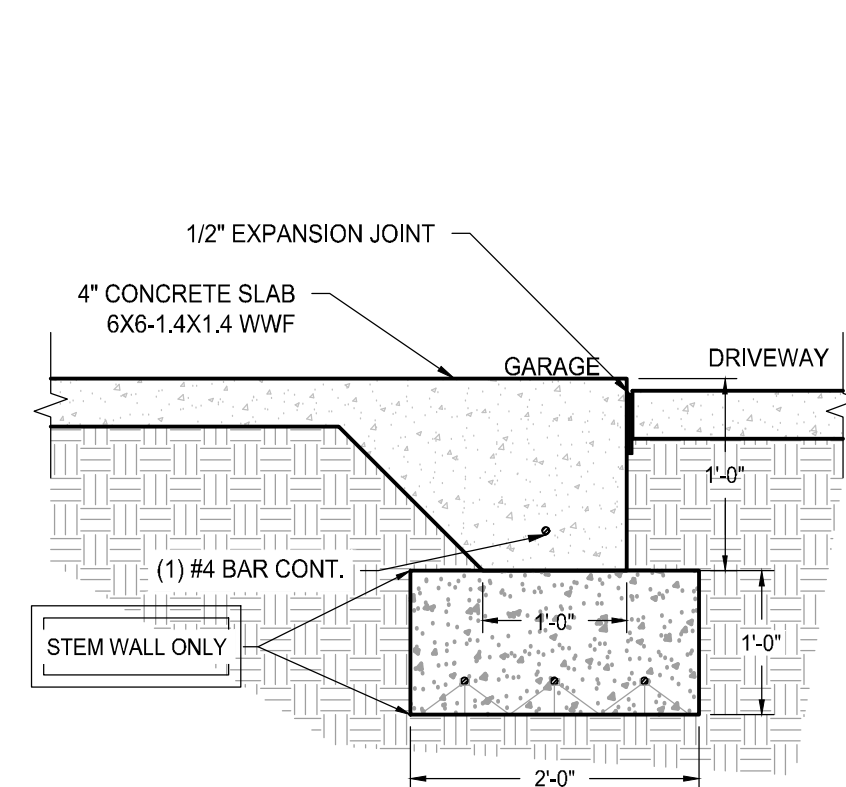


TYP GARAGE PORTAL
FULL SCALE: 3/4"=1'-0"

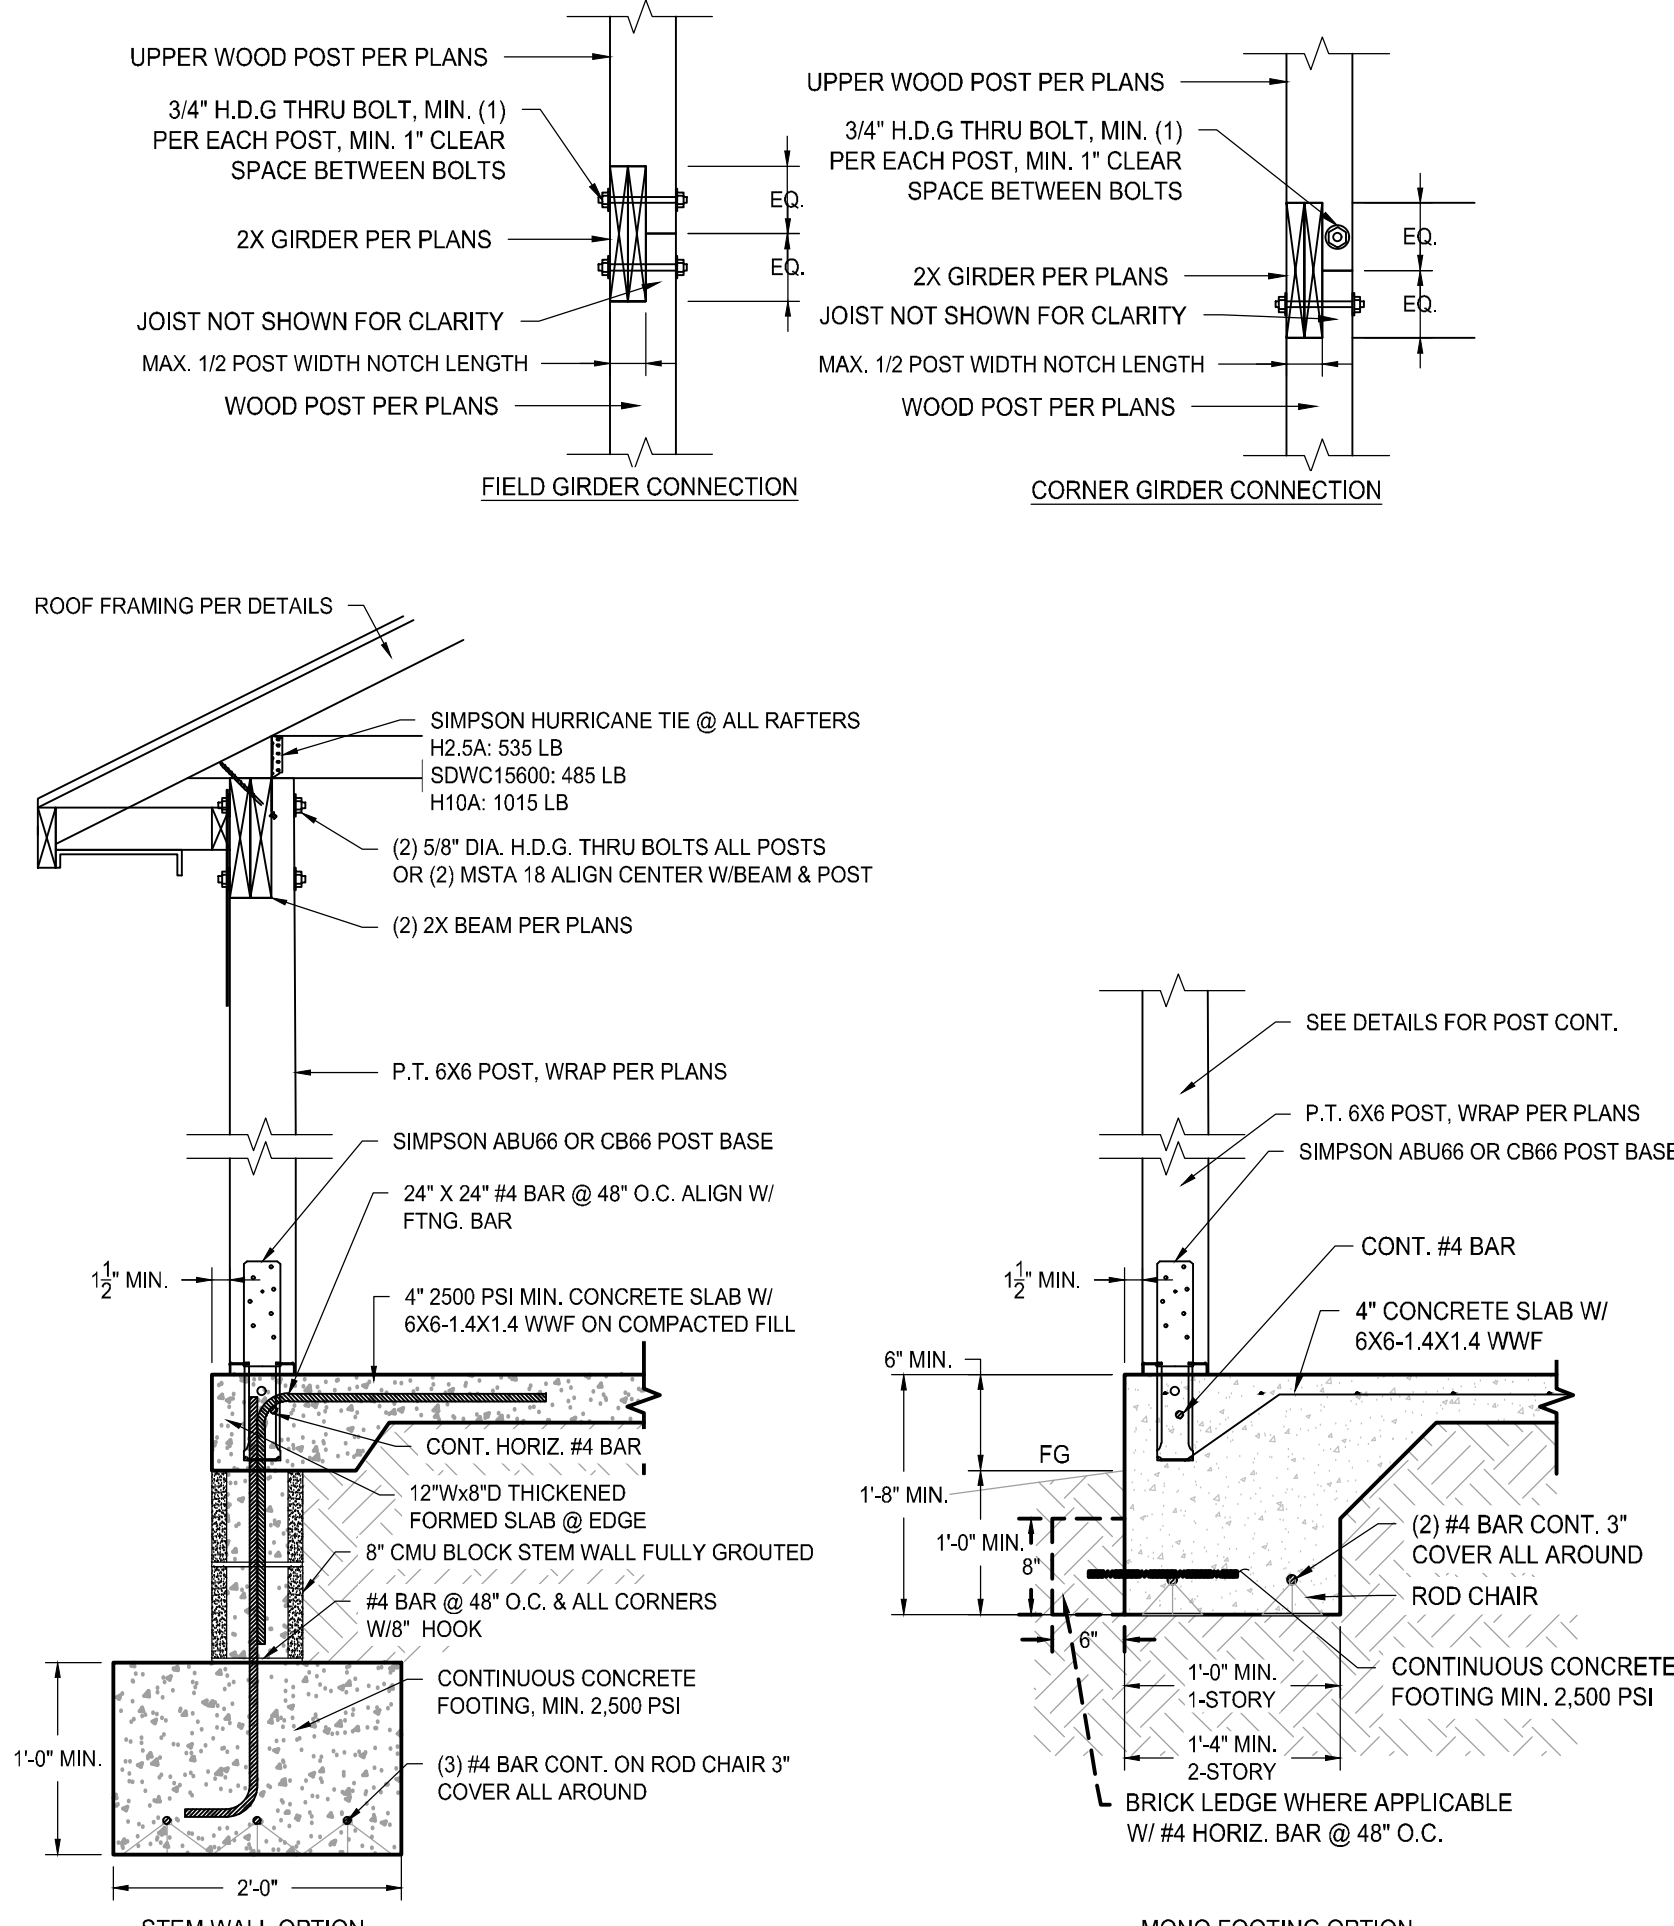


TYP PORCH EDGE/ COLUMN
FULL SCALE: 3/4"=1'-0"

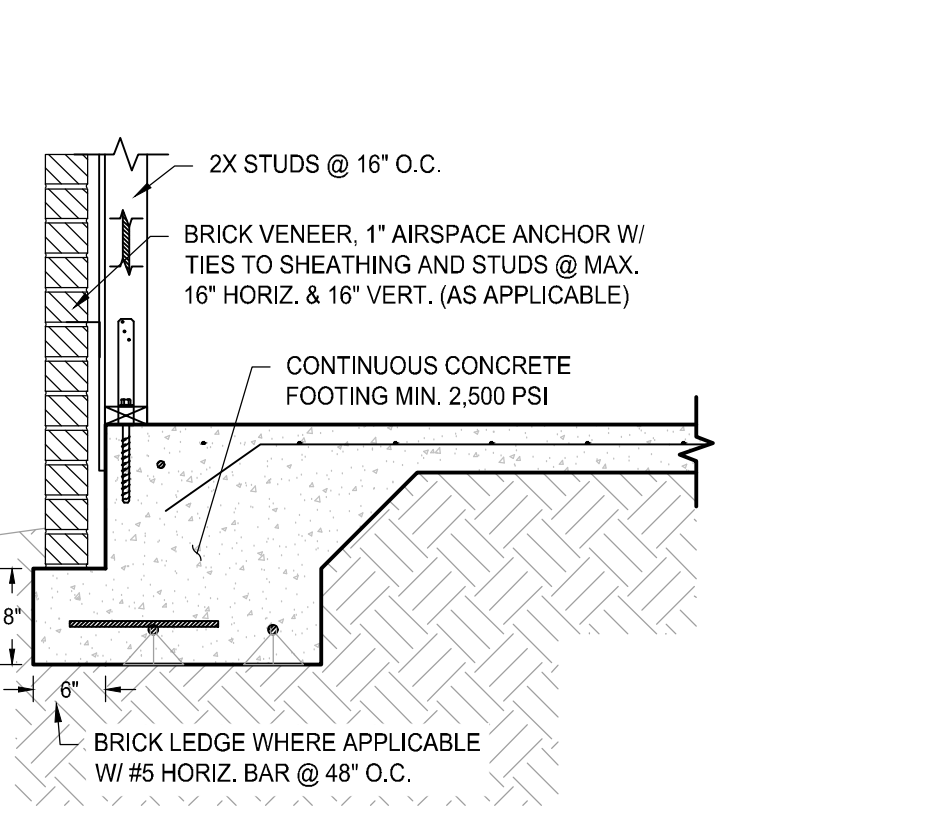

TYP BRICK ATTACHMENT
FULL SCALE: 3/4"=1'-0"

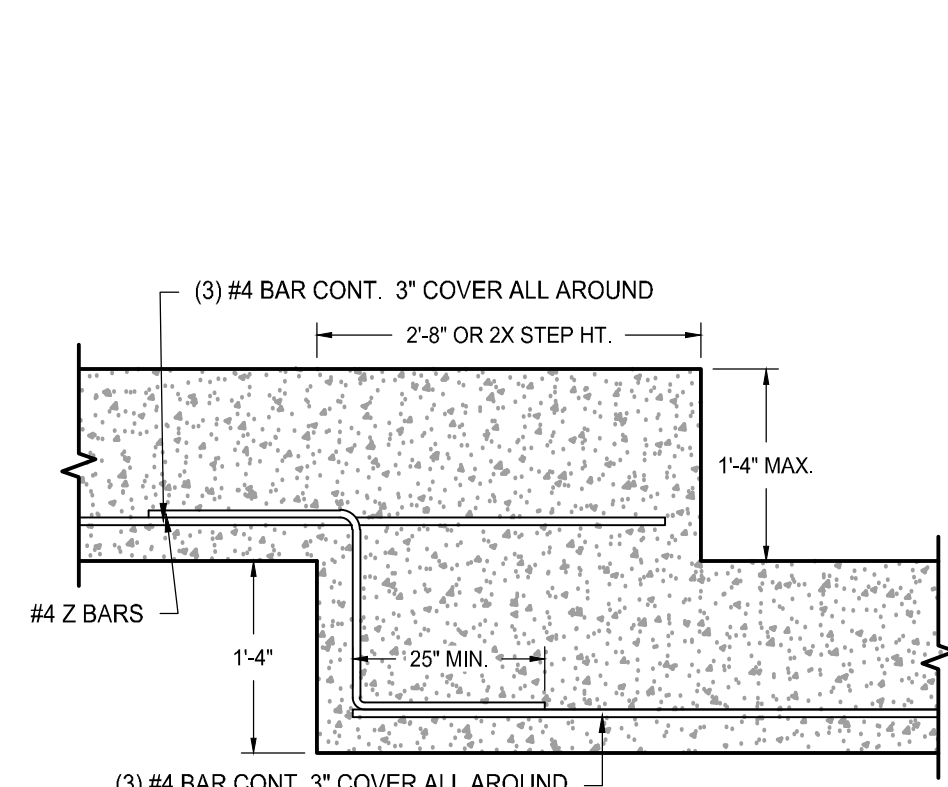


TYP FOOTING STEP
FULL SCALE: 3/4"=1'-0"

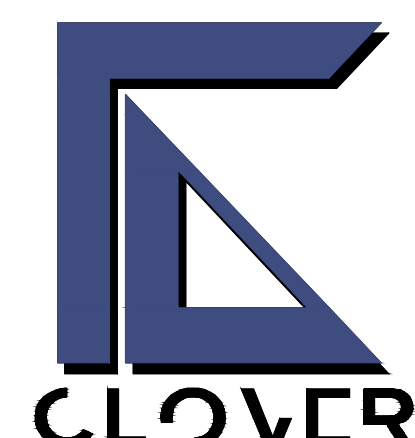

CONTACT

CLOVER-CSE LLC
FL# L21000519166
GA# 20127884
COSHEA@CLOVER-CSE.COM
(850) 750-1987

SEAL

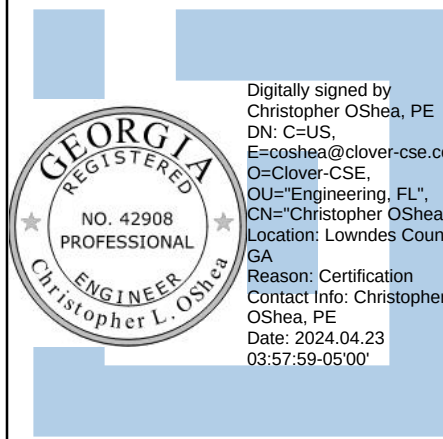

INFO

OWNER AND/OR CONTRACTOR IS RESPONSIBLE FOR THE CONSTRUCTION PHASE OF THIS PROJECT AND SHALL FOLLOW ALL LOCAL AND NATIONAL BUILDING CODES AS APPLICABLE.

CONSULTANTS



PROJECT NAME

BALLANTYNE

PROJECT LOCATION

BALLANTYNE SUBDIVISION
CLYATTSTONE ROAD & SIMPSON LANE
LAND LOT 38, DISTRICT 12
LOWNDES COUNTY
GEORGIA

REVISIONS

ID	DATE	DESCRIPTION
0	01/30/24	PERMIT SET

PROJECT NO: 130-23-004
DESIGNED BY: CLO
DRAWN BY: JBM
CHECKED BY: CLO
SHEET TITLE

STRUCTURAL
DETAILS

SHEET NUMBER

S-201

130-23-04 Structural Notes and Details Ballantyne.dwg

1 FOUNDATION CONNECTION

CABLE TYPE	EDGE DISTANCE
QTB	2 1/2"
QTG	2 1/2"
QTO	3"
QTR	3 1/2"

2 EPOXY ANCHOR CONNECTION

3 CONCRETE CURB INSTALL (GARAGE)

4 QUICK TIE SPARTAN ANCHOR

5 TYPICAL INSTALLATION HOLE AND EMBEDMENT REQUIREMENTS

6 TYPICAL WALL ELEVATION DETAILS

HEADER NOTES:

1. STRAPS AT HEADERS ARE ONLY REQUIRED WHEN

A. WHEN HEADER IS WIDER THEN THE QUICK TIE SPACING.

B. WHEN HEADER HAS A GIRDER TRUSS DIRECTLY ABOVE.

2. PROVIDE 2-CS16 STRAPS ON KING AND JACK STUDS THROUGH FLOOR SYSTEM BELOW IF THERE IS NOT A QUICK TIE ADJACENT TO OPENING.

8 WHEN REQUIRED EXTENSION CONNECTION

9 RIM BOARD CONNECTION

12 GABLE END CONNECTION

LEGEND

QUICK TIE SYMBOLS		QUICK TIE ANCHOR AND TRUSS LEGEND			
1-STORY	2-STORY	3-STORY	4-STORY	5-STORY	ALLOWABLE LOAD
B	3/16" WIRE ROPE W/ 3/8" STEEL STUD				1,909 LBS.
G	1/4" WIRE ROPE W/ 1/2" STEEL STUD				2,839 LBS.
O	5/16" WIRE ROPE W/ 5/8" STEEL STUD				4,455 LBS.
R	3/8" WIRE ROPE W/ 3/4" STEEL STUD				6,545 LBS.

1-HA4

1-QD1

1

QD1

1-HA4

1-QD1

1

QD1

1-HA4

1-QD1

1

QD1

1-HA4

1-QD1

1

QD1

10 FLOOR TRUSS CONNECTION

13 QT UNDER TOP PLATE

14 STEEL BEAM CONNECTION

7 WHEN REQUIRED HEADER STRAPPING DETAIL WHERE OPENING IS GREATER THAN 6'-0"

INSTALLATION (OF QUICK TIE CABLES ONLY)

INSTALLER: ALL QUICK TIE ANCHORAGE SHALL BE INSTALLED BY A TRAINED INSTALLER WHO SHALL PROVIDE THE FOLLOWING DOCUMENTATION FOR APPROVAL BEFORE PROCEEDING WITH THE WORK.

1. CERTIFICATE(S) IDENTIFYING SPECIFIC TRAINED INSTALLER(S) WHO WILL BE WORKING ON THIS PROJECT.

1.1. QUICK TIE DETAILED INSTALLATION INSTRUCTIONS.

1.2. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR PROPER INSTALLATION OF ALL ELEMENTS OF THE WALL SYSTEM NOT SPECIFICALLY PROVIDED BY QUICK TIE PRODUCTS, INC. SOME OF THESE ELEMENTS HAVE SPECIFIC REQUIREMENTS THAT ARE DETAILED IN THIS SUBMITTAL:

1.2.1. DESIGN LOAD CAPACITIES FOR QUICK TIE PRODUCTS IN THIS SUBMITTAL ARE BASED ON THE CONTRACTOR USING DOUGLAS FIR LARCH (G=0.50) OR SOUTHERN YELLOW PINE (G=0.55) LUMBER FOR THE FRAMING U.N.O. IF DOUGLAS FIR (S) OR HEM FIR (N) (G=0.46) IS USED MULTIPLY TABLE VALUES BY 0.88. IF SPRUCE-PINE-FIR (G=0.42) LUMBER IS USED MULTIPLY TABLE VALUES BY 0.88.

1.2.2. STUD FRAMING --- QUICK TIE ANCHORS, WHEN PRE-TENSIONED, IMPART A COMPRESSION LOAD ON THE STUD FRAMING. THE DETAILS IN THIS SUBMITTAL INCLUDE SUGGESTED STUD ARRANGEMENTS FOR RESISTING THESE LOADS, BUT THE RESPONSIBILITY FOR THE PERFORMANCE OF THESE MEMBERS RESTS WITH THE ARCHITECT OR EOR.

1.2.3. SHEATHING --- IN ORDER FOR THE UPLIFT SYSTEM TO RESIST LOADS SHOWN IN THE QUICK TIE SPACING TABLE ON THIS SHEET, THE SHEATHING, AT A MINIMUM, MUST BE:

- ONE SIDE 3/8 INCH OSB WITH 8D NAILS ON A 6/12 PATTERN.
- TWO SIDES 1/2 INCH GWB WITH #6 X 1 1/2 INCH SCREWS ON A 16/16 PATTERN. WHEN THIS WALL SYSTEM IS USED, ADDITIONAL STRAPPING IS PROVIDED AND MUST BE INSTALLED IN ACCORDANCE WITH DETAIL "2" ON SHEET QD1.
- ONE SIDE 1/2 INCH GWB WITH #6 X 1 1/2 INCH SCREWS ON A 16/16 PATTERN EACH FOR A DOUBLE PARTITION WALL WITH WITH THE UPPERMOST TOP PLATE COVERING BOTH THE PARTITION WALLS (SEE DETAIL 9 ON QD1). WHEN THIS WALL SYSTEM IS USED, ADDITIONAL STRAPPING IS PROVIDED AND MUST BE INSTALLED IN ACCORDANCE WITH DETAIL "2" ON SHEET QTD.

2. WHERE BOXED COLUMNS OR WALLS ARE TO BE ENCLOSED ON BOTH SIDES, SHEATHING ON ONE SIDE SHALL BE LEFT OFF UNTIL FULLY INSPECTED BY REQUIRED INSPECTION OFFICIALS.

2.1. PLATES --- THE TOP PLATES AND SOLE PLATES WILL BE DRILLED BY THE QUICK TIE INSTALLER DURING THE INSTALLATION PROCESS. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR PROVIDING APPROPRIATE FIRE PROOFING/STOPPING FOR THESE PENETRATIONS TO MEET ALL RATED ASSEMBLY REQUIREMENTS.

2.2. CONCRETE --- THE CONCRETE WILL BE DRILLED BY THE QUICK TIE INSTALLER DURING THE INSTALLATION PROCESS. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR INSURING THAT THE CONCRETE RECEIVING THE EPOXIED STUD HAS REACHED A MINIMUM OF 2500 PSI COMPRESSIVE STRENGTH BEFORE THE QUICK TIES ARE PRE-TENSIONED. FURTHERMORE, THE GENERAL CONTRACTOR SHALL INSURE THAT THE EPOXIED STUD REMAINS UNDISTURBED UNTIL THE EPOXY HAS ACHIEVED MINIMUM "LOAD TIME" FOR THE TEMPERATURE AND CONDITIONS INDICATED ON THE QUICK TIE "OE-1" LABEL. IF 2000 PSI CONCRETE IS USED ON THE PROJECT INCREASE THE GREEN CABLE EDGE DISTANCE FROM 2 1/2" TO 3 1/2".

CONTACT

CLOVER-CSE LLC
FL# L21000519166
GA# 20127884
COSHEA@CLOVER-CSE.COM
(850) 750-1987

SEAL

INFO

OWNER AND/OR CONTRACTOR IS RESPONSIBLE FOR THE CONSTRUCTION PHASE OF THIS PROJECT AND SHALL FOLLOW ALL LOCAL AND NATIONAL BUILDING CODES AS APPLICABLE.

CONSULTANTS

America's Builder

PROJECT NAME

BALLANTYNE

PROJECT LOCATION

BALLANTYNE SUBDIVISION
CLYATTSTONE ROAD & SIMPSON LANE
LAND LOT 38, DISTRICT 12
LOWNEDES COUNTY
GEORGIA

REVISIONS

ID	DATE	DESCRIPTION
0	01/30/24	PERMIT SET

PROJECT NO: 130-23-004
DESIGNED BY: CLO
DRAWN BY: JBM
CHECKED BY: CLO
SHEET TITLE

QUICK TIE DETAILS

SHEET NUMBER

Q-101