

RENOVATIONS & NEW CONSTRUCTION FOR PANCARE - CHIPLEY

1440 Main Street, Chipley, FL 32428

PANCARE OF FLORIDA , INC.

PROJECT INDEX:

- GENERAL:

G-001

COVER SHEET

LS-101

LIFE SAFETY PLAN
- STRUCTURAL SHEETS

S001

FOUNDATION PLAN

S101

FOUNDATION PLAN

S102

ROOF FRAMING PLAN

S201

FOUNDATION DETAILS

S202

STRUCTURAL DETAILS
- ARCHITECTURAL SHEETS

A-001

ABBREVIATIONS, SYMBOLS, LEGEND,
& FL PRODUCT APPROVAL

AD-101

DEMOLITION PLAN

AD-101.1

DEMOLITION REFLECTED CEILING PLAN

AD-201

DEMOLITION ELEVATIONS

A-100

SITE PLAN

A-101

FLOOR PLAN

A-101.1

DIMENSION PLAN

A-101.2

FINISH PLAN

A-101.3

REFLECTED CEILING PLAN

A-102

ROOF PLAN

A-201

ELEVATIONS

A-301

BUILDING SECTION

A-302

WALL SECTIONS

A-303

PARTITION TYPES

A-401

ENLARGED PLANS

A-402

INTERIOR ELEVATIONS

A-403

INTERIOR ELEVATIONS

A-404

INTERIOR ELEVATIONS

A-501

HEAD, SILL, & JAMB DETAILS

A-600

DOOR SCHEDULE, DOOR & WINDOW ELEVATIONS

A-601

ROOM FINISH SCHEDULE
- PLUMBING SHEETS

P101

DOMESTIC WATER & SANITARY WASTE

P102

PLUMBING FLOOR PLAN

P201

DENTAL PIPING PLAN

P201

PLUMBING RISERS

P202

PLUMBING NOTES, LEGEND, SCHEDULE, & DETAILS
- MECHANICAL SHEETS

M101

HVAC FLOOR PLAN

M201

HVAC SCHEDULES, NOTES, & DETAILS

M202

HVAC DETAILS
- ELECTRICAL SHEETS

E001

GENERAL NOTES AND LEGEND

E002

PANEL SCHEDULES

E003

POWER RISER

E100

POWER PLAN - NEW WORK

E101

DENTAL PLAN & DETAILS - NEW WORK

E102

DENTAL PLAN & DETAILS - NEW WORK

E200

LIGHTING PLAN - NEW WORK

ED100

POWER PLAN - DEMOLITION

ED200

LIGHTING PLAN - DEMOLITION

DAG

ARCHITECTS

DAG Architects AR0009694

455 Harrison Ave Suite 1 Panama City, FL 32401

850.387.1671

www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.

RENOVATIONS &
NEW CONSTRUCTION
FOR PANCARE CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:		
No.	Description	Date


COVER SHEET

PROJECT NUMBER	23071
DATED	02/05/2023


G-001

OWNER:	ARCHITECT:	MECHANICAL	STRUCTURAL	ELECTRICAL:
PanCare of Florida,INC. 403 E. 11th Street Panama City, FL 32401 Phone: (850) 769-1551 Contact: Robert Thompson Email: rthompson@pancarefl.org	DAG Architects, Inc. 455 Harrison Ave., Suite I Panama City, FL 32401 Phone: (850) 387-1671 PIC: Owen Gipson, AIA Email: ogipson@dagarchitects.com	Johnson-Peaden Engineering Inc. 1399M Jenks Ave. Panama city,FL 32401 Phone: (850) 215-4068 PIC: Jon Peaden, PE Email: j.peaden@johnsonpeaden.com	Keever McKee 1624 Metropolitan Boulevard, Suite A Tallahassee, FL 32308 Phone: (850) 727-5367 PIC: Brian E. Keever, PE Email: bkeever@keevermckee.com	Watford Engineering 4452 Clinton Street Marianna, FL 32446 Phone: (850) 526-3447 PIC: Anthony L. Davis, PE Email: anthony@watford-engineering.com


A1	Project Teams and Discipline Allocation
SCALE: NTS	

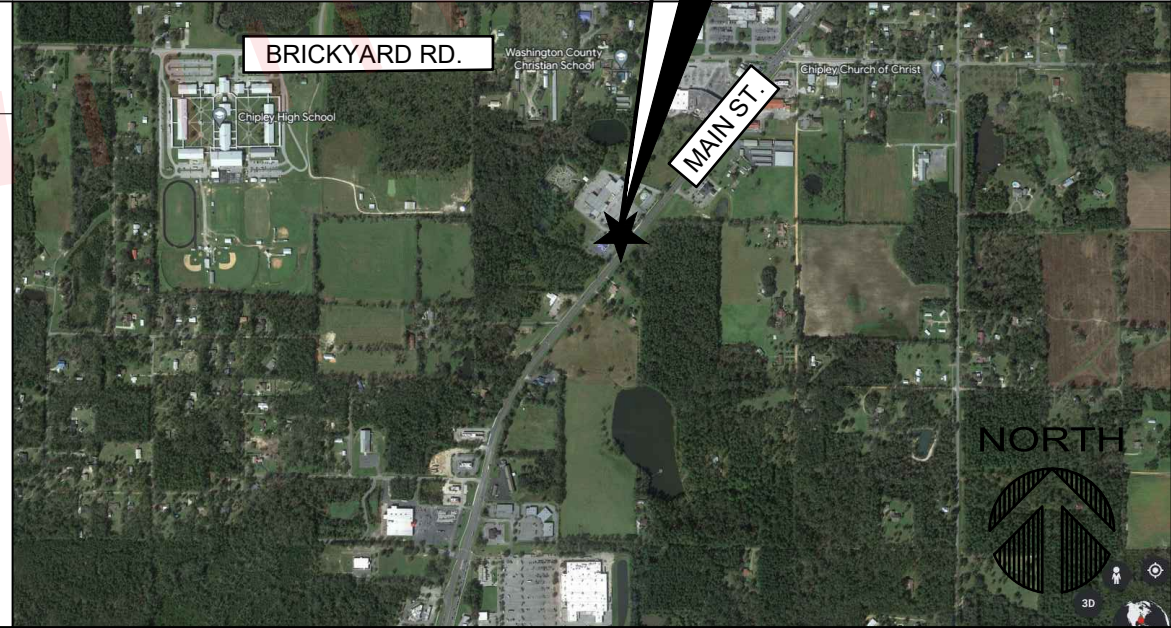

A3	Project Location Map
SCALE: NTS	

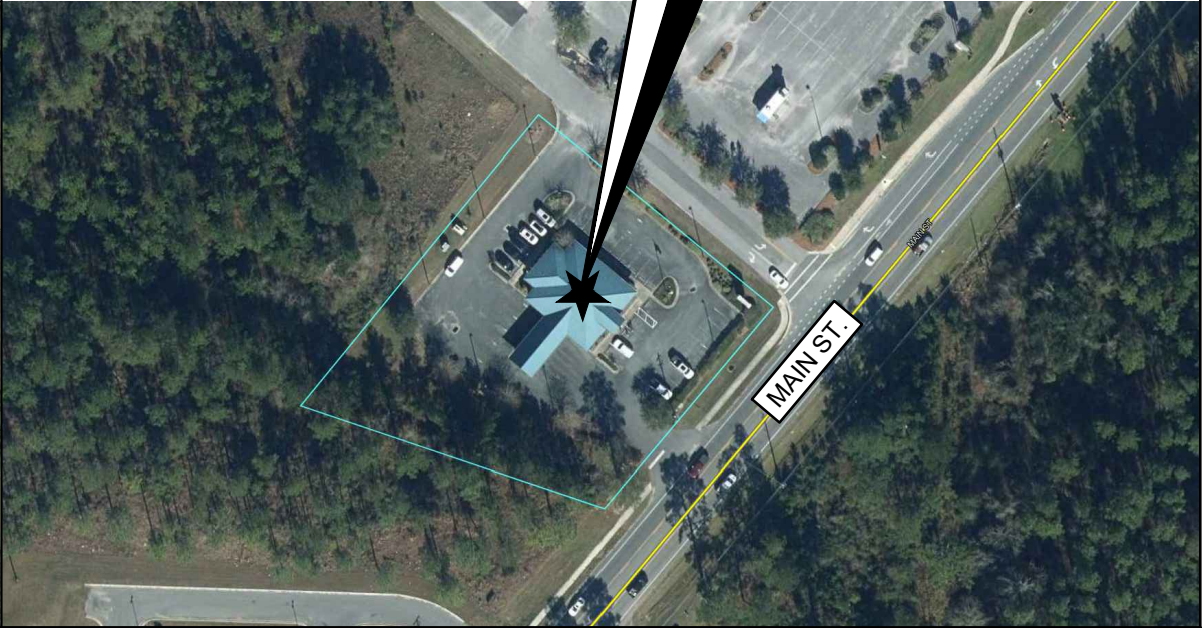

A4	Existing Building Image
SCALE: NTS	

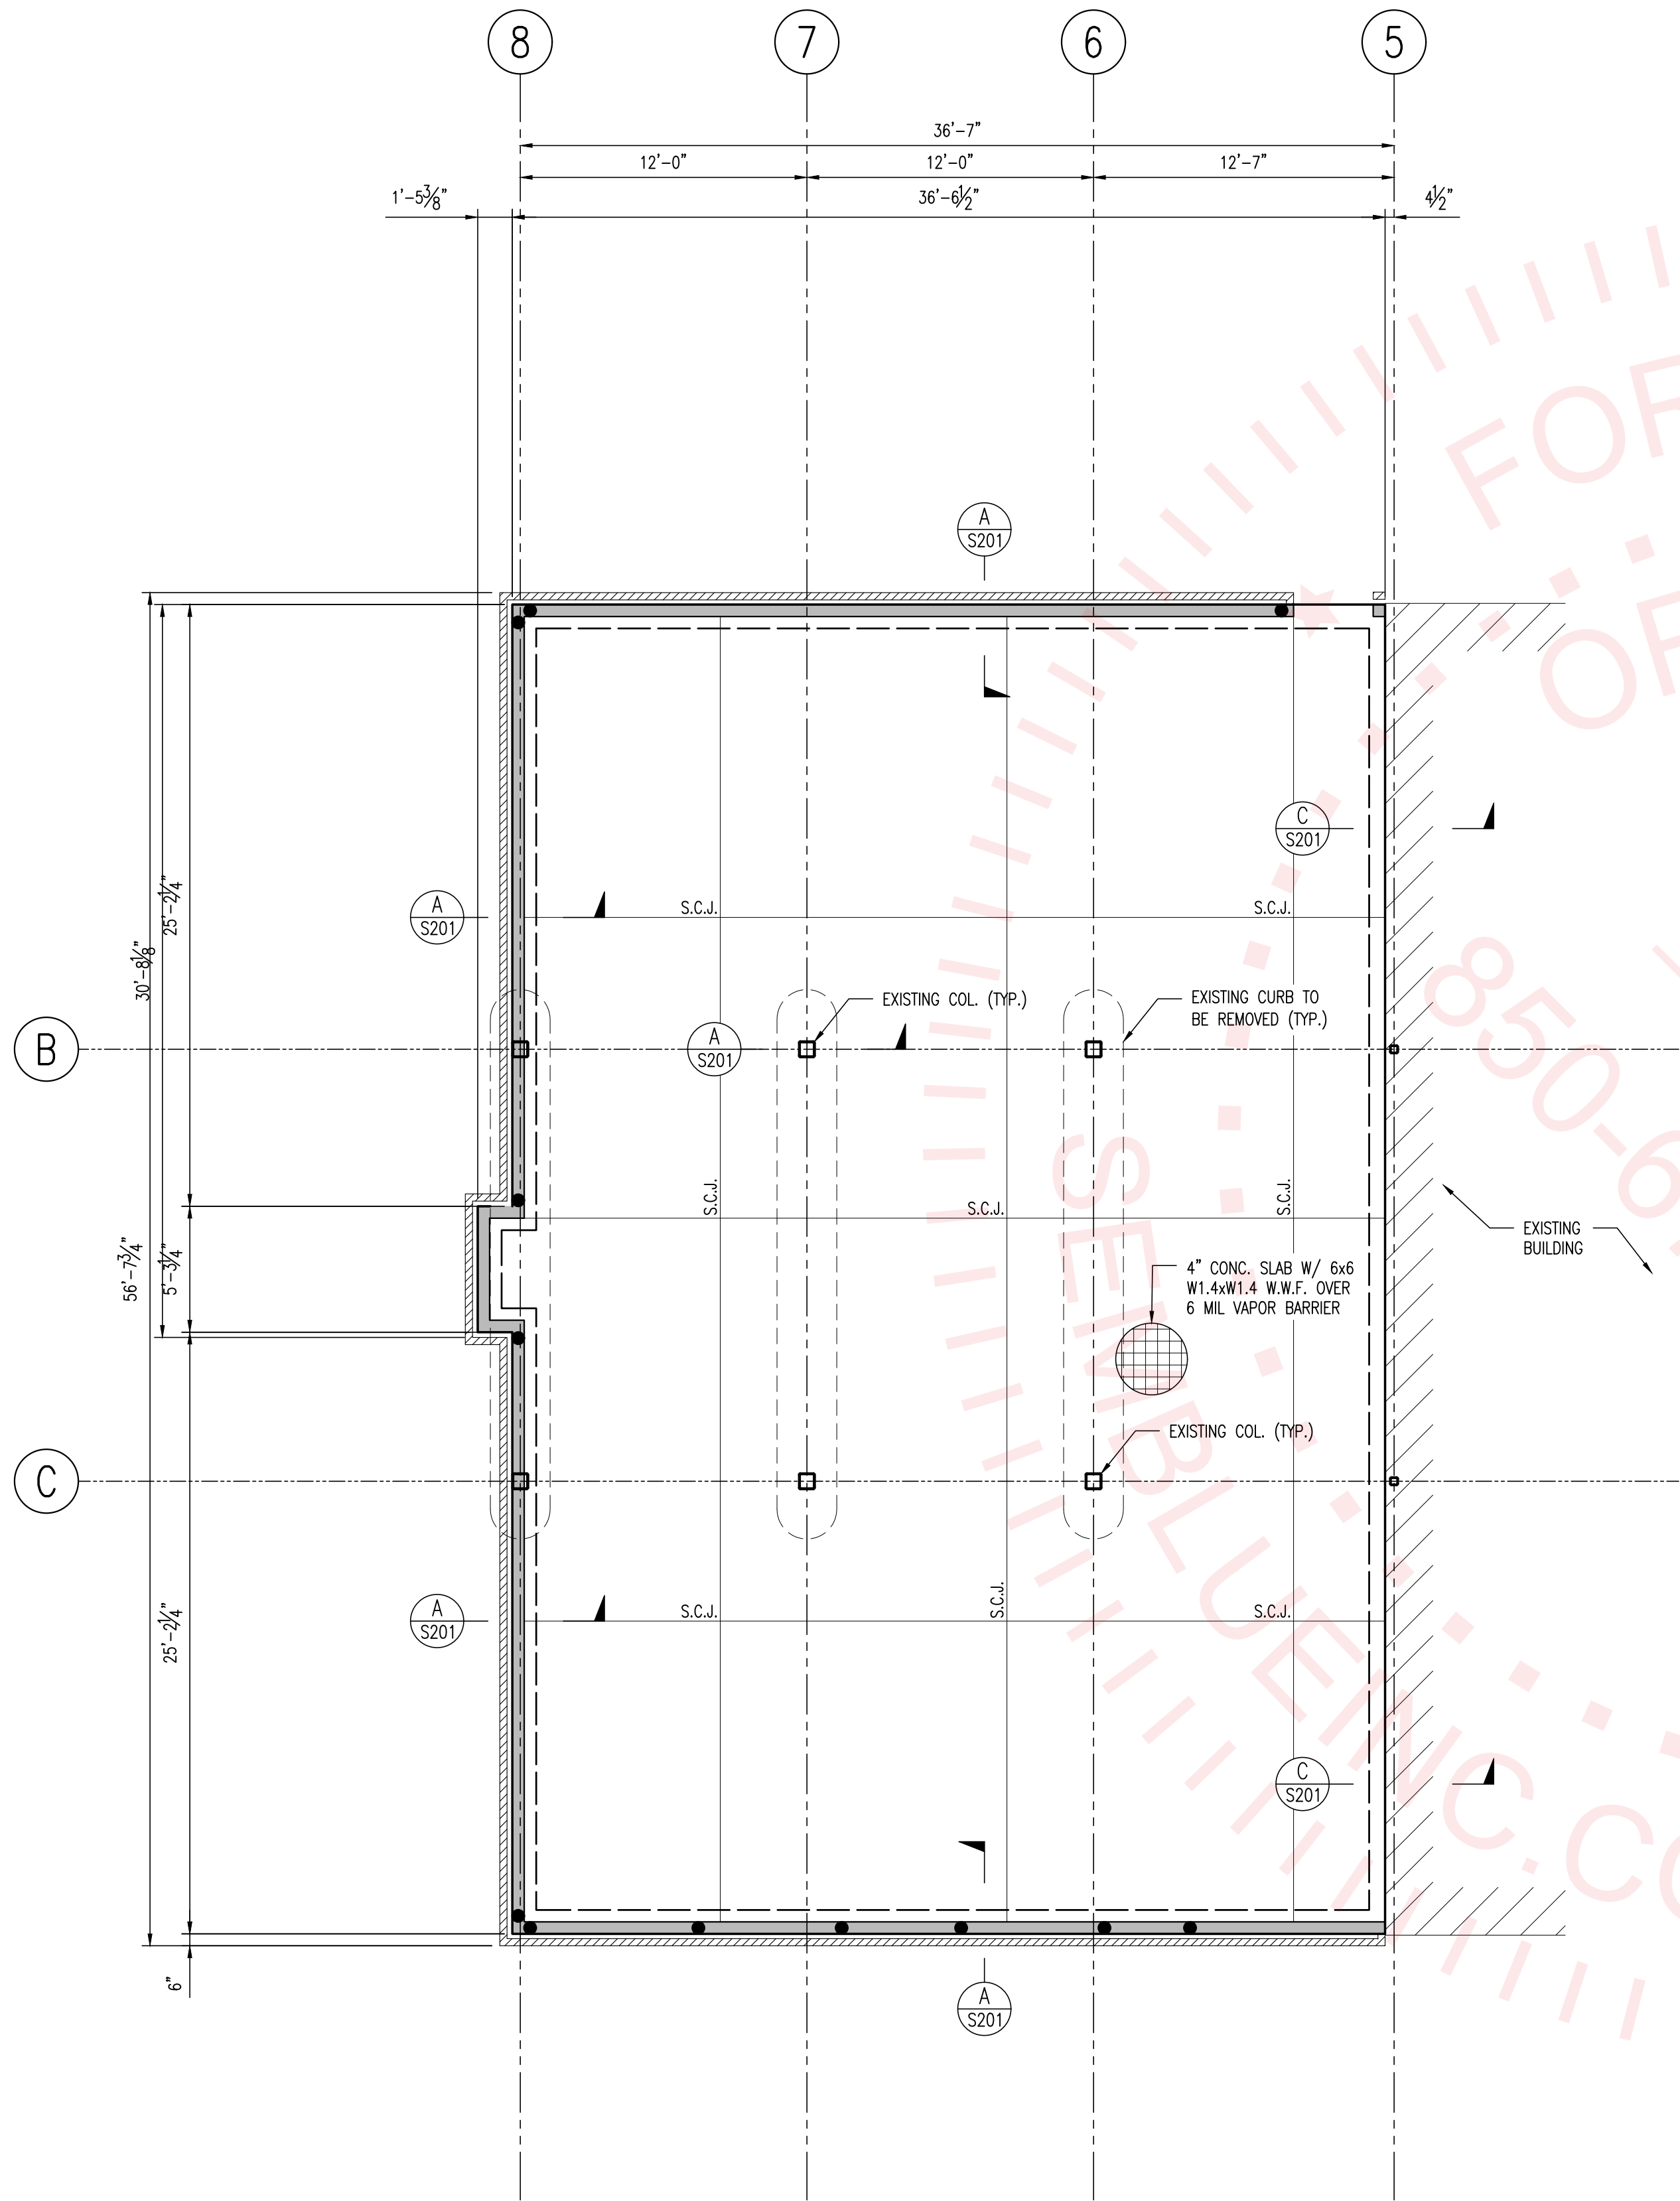

- FOUNDATION NOTES:
1. THE DIMENSIONS SHOWN ARE GIVEN TO EDGE OF FINISHED SLAB, CENTERLINE OF COLUMNS, AND CENTERLINE OF FOOTINGS, RESPECTIVELY. SEE ARCHITECTURAL PLANS FOR EXACT LOCATION OF LOAD BEARING AND NON-LOAD BEARING WALLS.
 2. THE FOLLOWING FINISHED FLOOR ELEVATION SHALL BE VERIFIED BY THE CONTRACTOR WITH THE FINAL CIVIL DRAWINGS. ANY DISCREPANCY SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGN PROFESSIONAL OF RECORD TO BE FORMALLY ADDRESSED PRIOR TO COMMENCEMENT OF CONSTRUCTION.

HOLD DOWN LEGEND	
HOLD DOWN SYMBOL	CLASSIFICATION
●	SIMPSON HDU4 TO A MIN. (2) 600S162-43 STUDS

WALL LEGEND	
WALL HATCH	CLASSIFICATION
[Hatch]	LOAD BEARING WALL W/ 600S162-43 STUDS @ 16" o.c.
[Hatch]	BRICK VENEER WALL - SEE ARCH.



DAG Architects AR0009694
455 Harrison Ave. Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

PRELIMINARY

NOT FOR
CONSTRUCTION

PANCARE OF FLORIDA, INC.
RENOVATIONS &
NEW CONSTRUCTION
FOR PANCARE - CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428




REVISIONS:		
No.	Description	Date

FOUNDATION PLAN

PROJECT NUMBER	23071
DATED	11/03/2023



S101

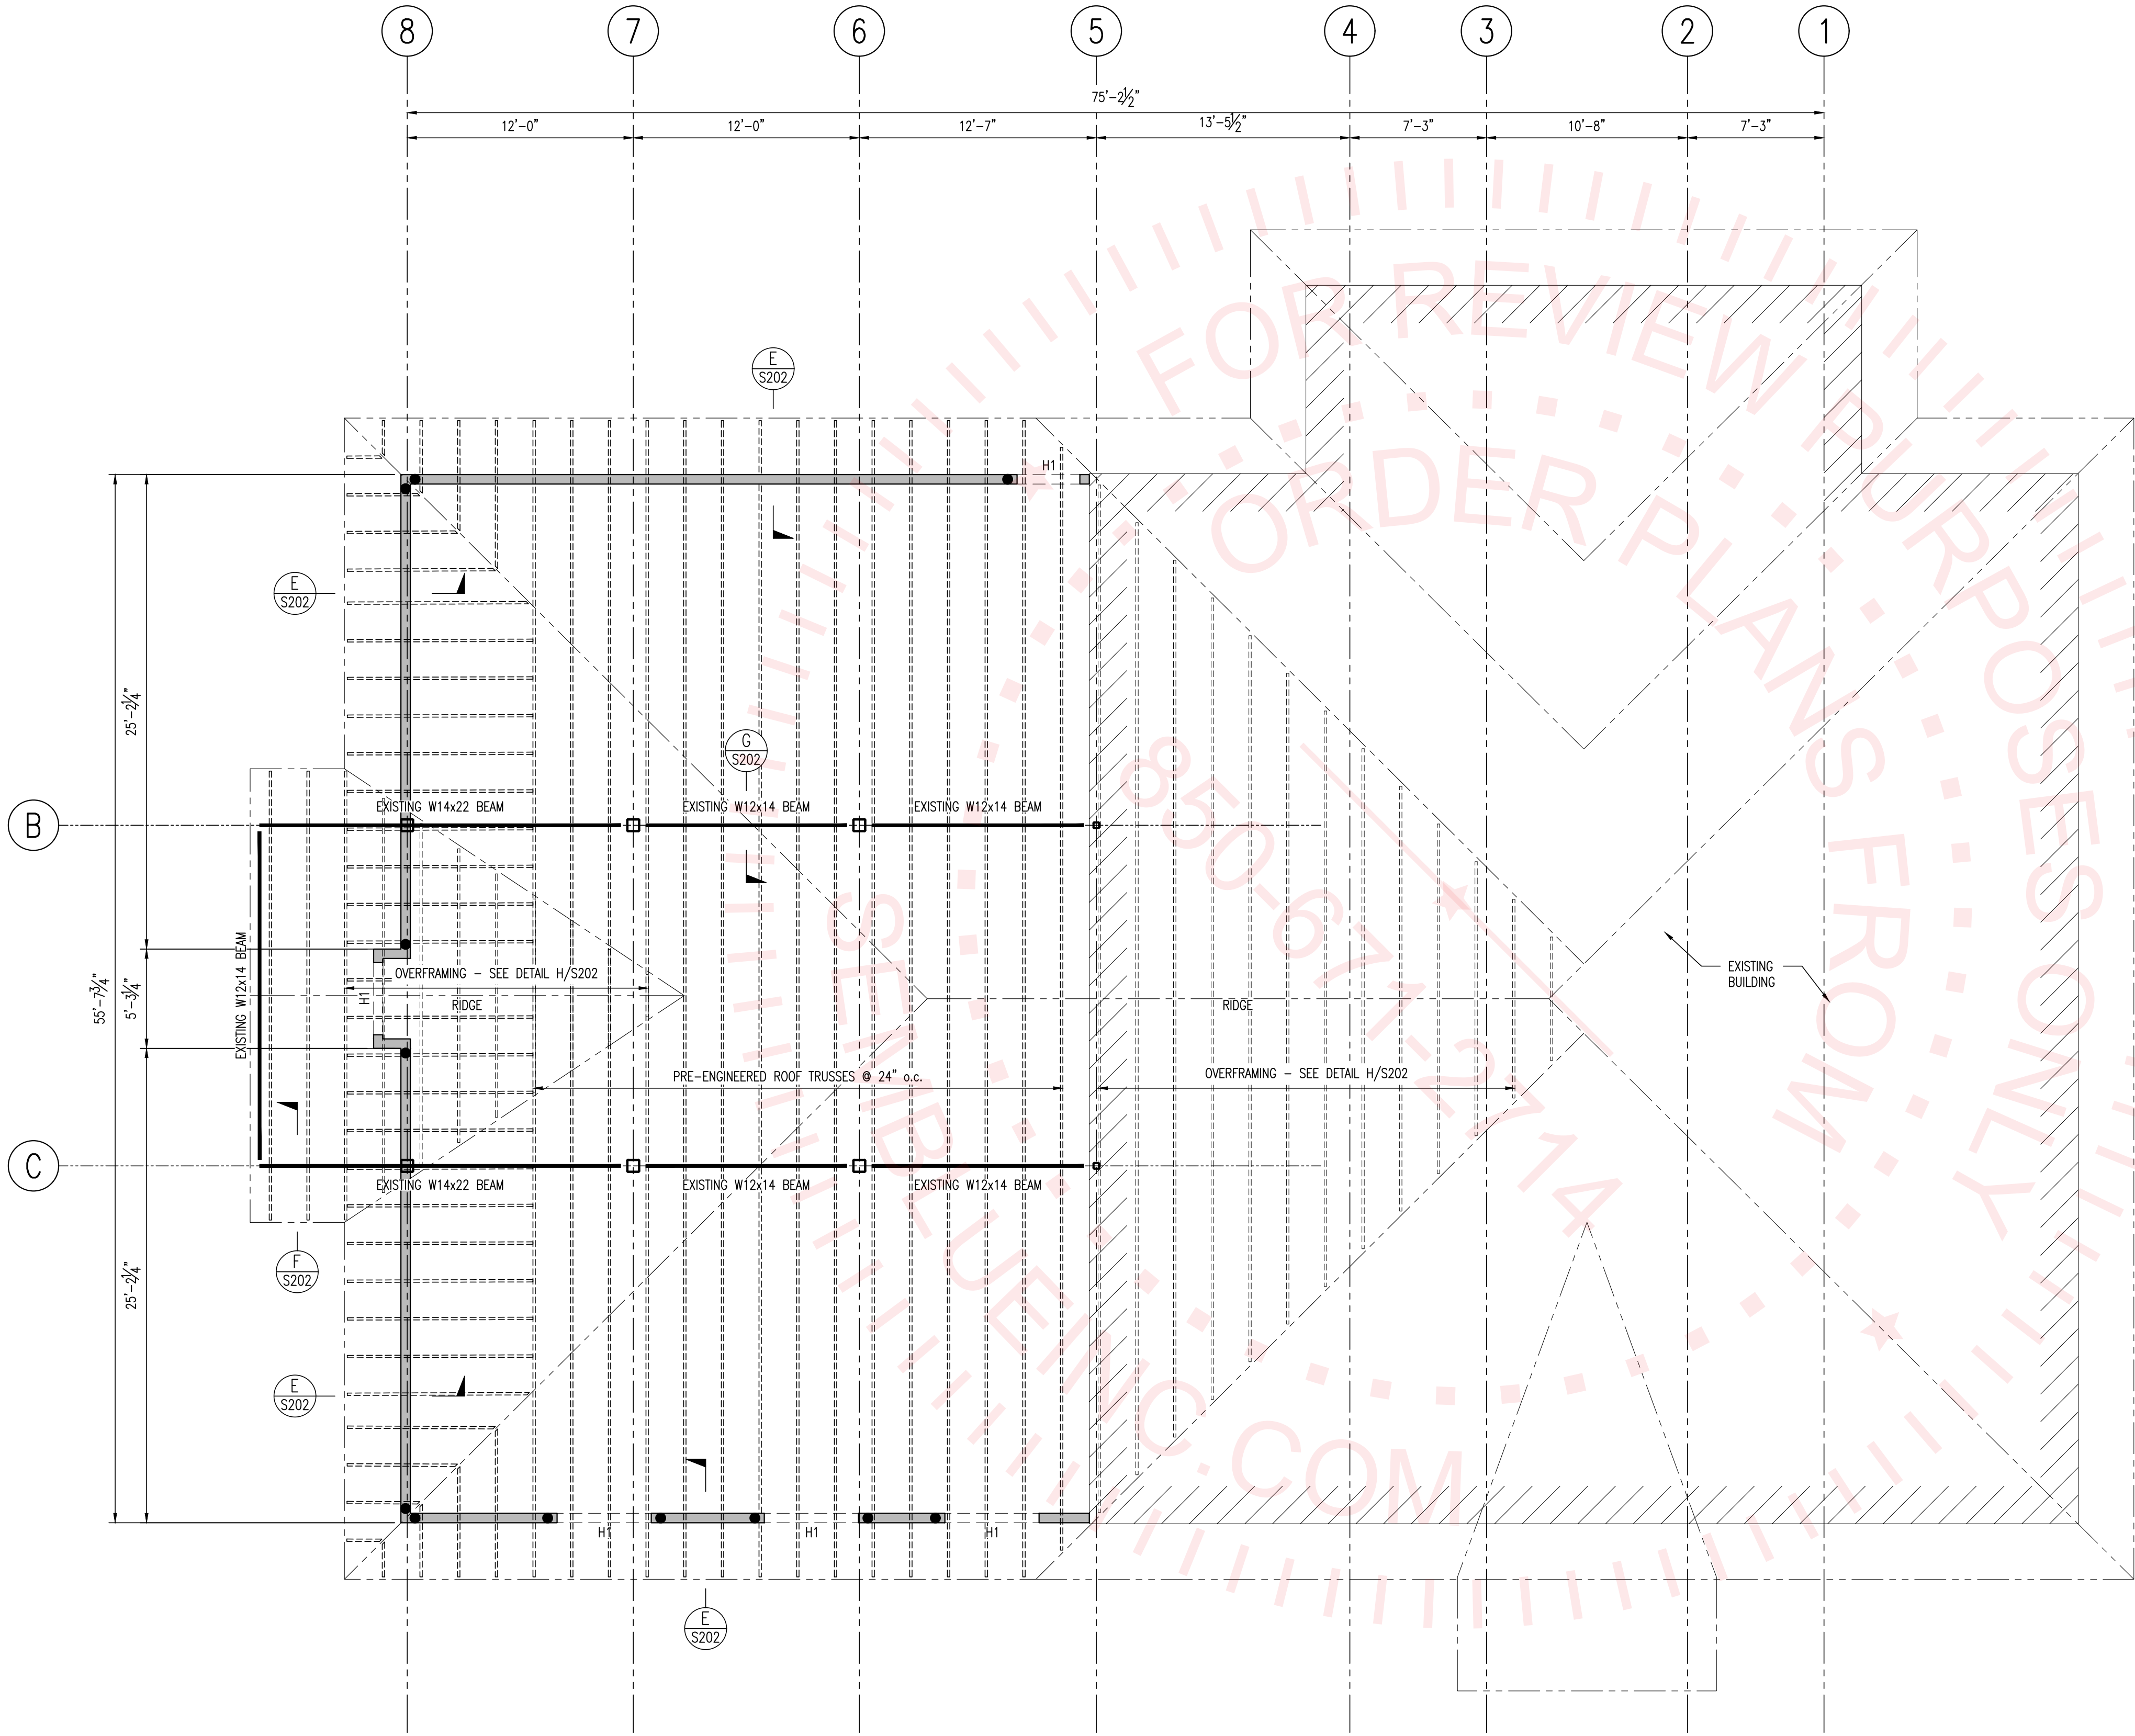

- FRAMING NOTES:
1. ROOF SHEATHING SHALL BE 3/4" PLYWOOD (WOOD STRUCTURAL PANELS - APA RATED SHEATHING, STRENGTH INDEX 24/16) FASTENED WITH 10d (0.148") RINGSHANK NAILS AT 4" ALONG PANEL EDGES AND 6" ALONG INTERMEDIATE SUPPORTING MEMBERS.
 2. ALL EXTERIOR WALLS SHEATHING SHALL BE 3/4" THICK DENSGLASS FIREGUARD SHEATHING OR APPROVED ALTERNATE.
 3. ALL EXTERIOR SHEATHING SHALL BE INSTALLED HORIZONTALLY AND IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
 4. FASTEN WITH #8 BUGLE HEAD SCREWS @ 8" o.c. AT EACH SUPPORT MEMBER (MINIMUM).
 5. ADD (3) 2x6 STUD PACK AT TRUSS GIRDER BEARING ON WALL.

CFS HEADER & JAMB SCHEDULE						
MARK	BEAM TYPE	JAMB TYPE	CONNECTION TYPE			COMMENTS
			BEAM-JAMB	JAMB-BASE	JAMB-TOP	
H1	B01	J01	(2) RCA225/54 [PATTERN 5B]	(2) RCA225/54 [PATTERN 5B]	(2) RCA225/54 [PATTERN 5B]	

HOLD DOWN LEGEND	
HOLD DOWN SYMBOL	CLASSIFICATION
●	SIMPSON HDU4 TO A MIN. (2) 600S162-43 STUDS

DAG

ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

PRELIMINARY

NOT FOR
CONSTRUCTION

PANCARE OF FLORIDA, INC.
RENOVATIONS &
NEW CONSTRUCTION
FOR PANCARE - CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:		
No.	Description	Date


ROOF FRAMING PLAN

PROJECT NUMBER	23071
DATED	11/03/2023



ROOF FRAMING PLAN
SCALE: 3/16" = 1'-0"


S102

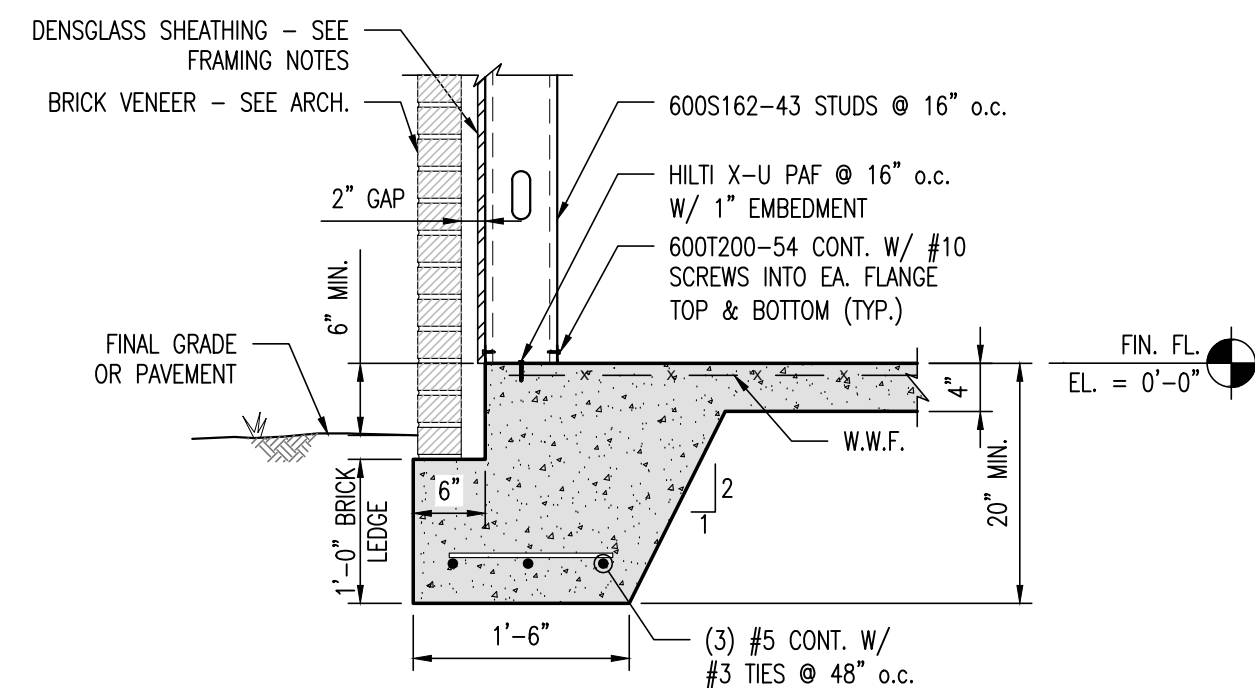

TYP. FOUNDATION DETAIL

SCALE: $\frac{3}{4}" = 1'-0"$


A
S201

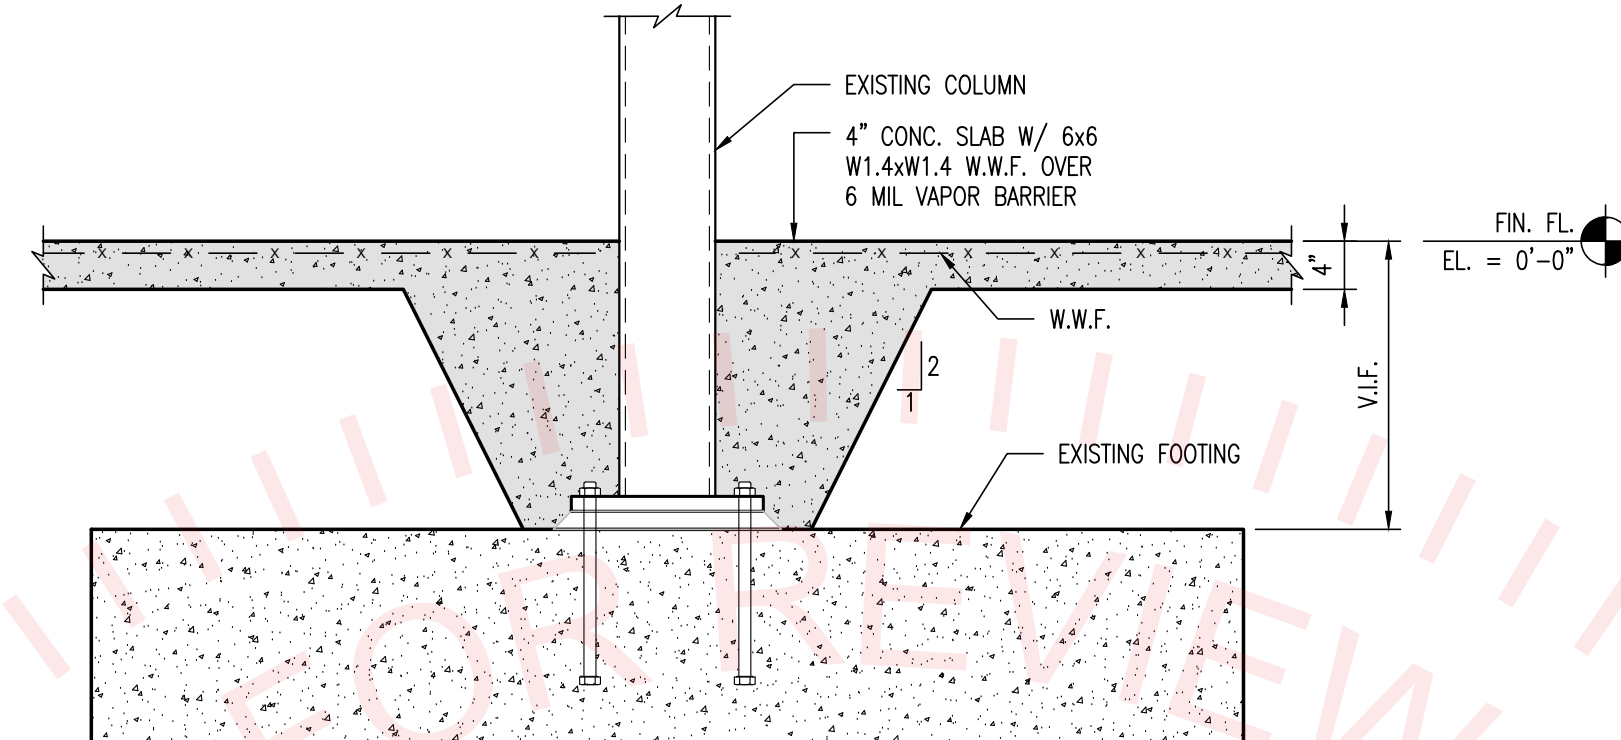

TYP. COLUMN POUR DETAIL

SCALE: $\frac{3}{4}" = 1'-0"$


(B
S201

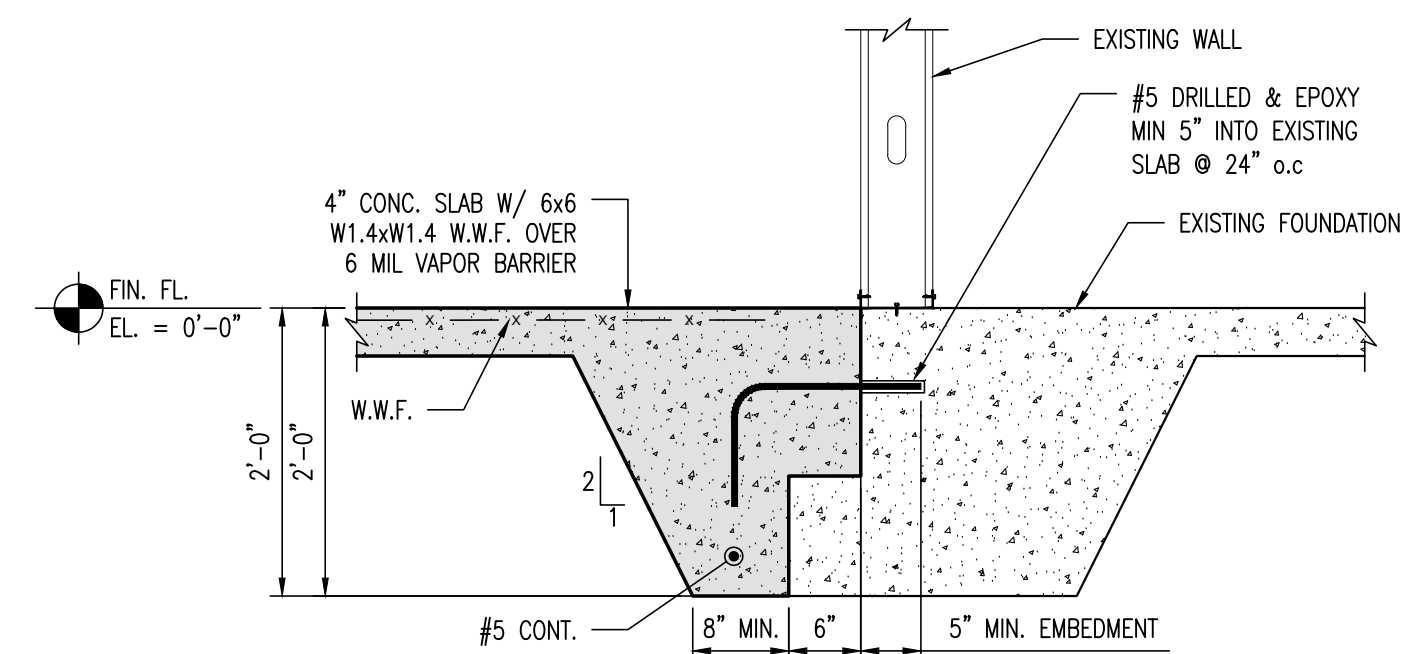

8" TURNDOWN DETAIL

SCALE: $\frac{3}{4}" = 1'-0"$

C
S20

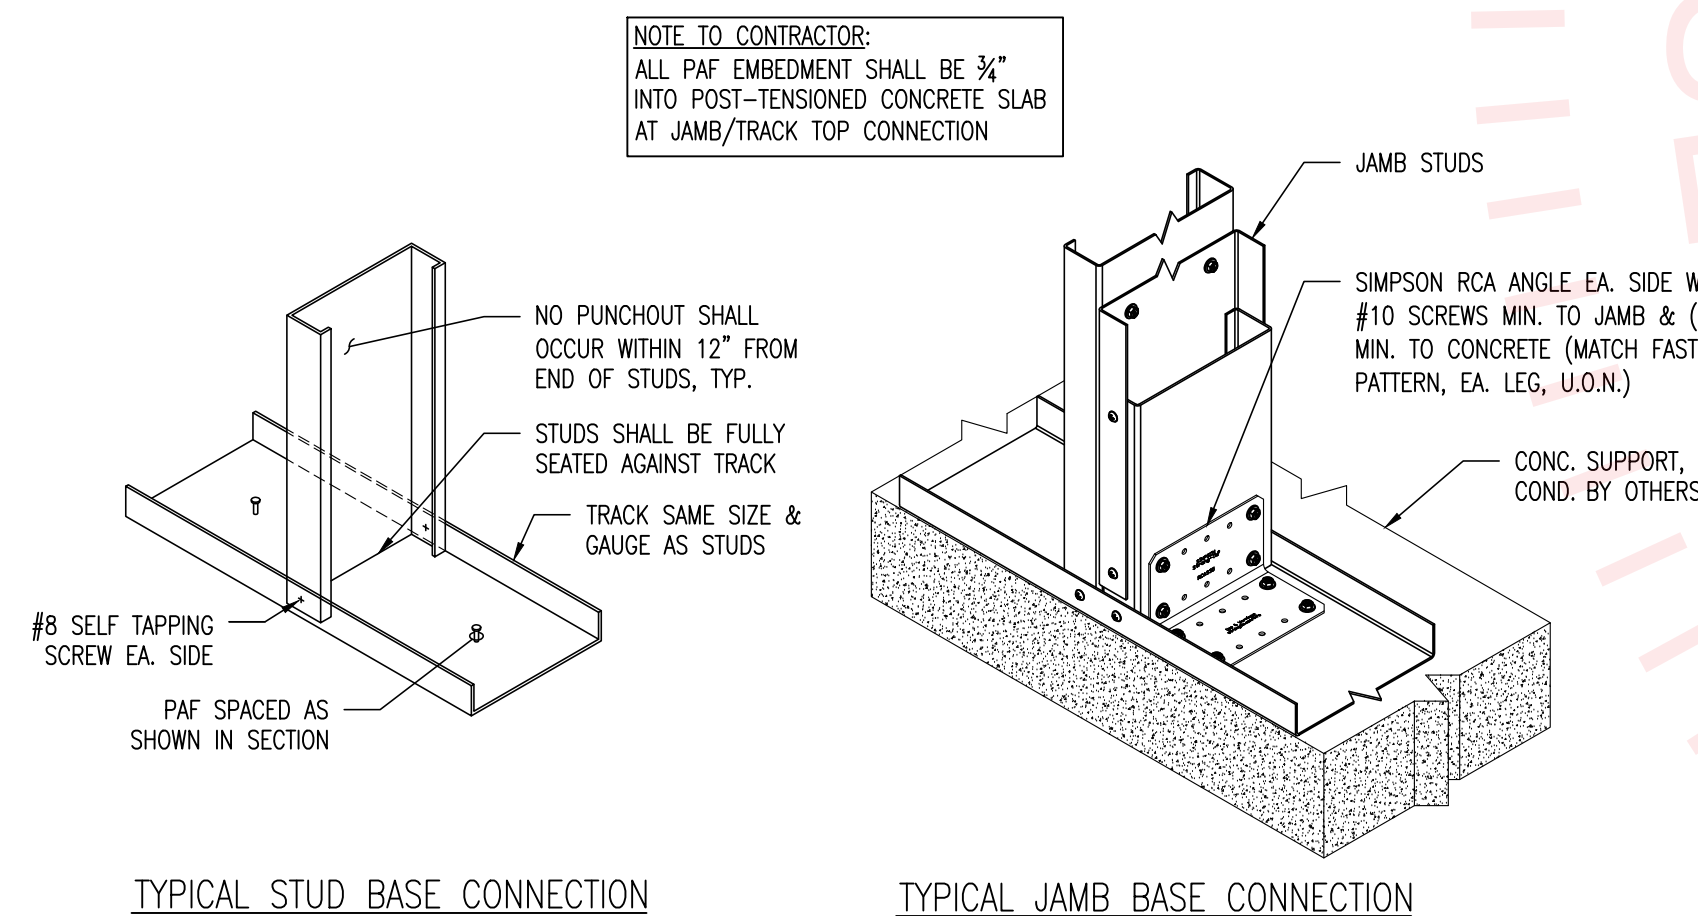


TYPICAL STUD BASE CONNECTION


TYPICAL JAMB BASE CONNECTION

- LIGHT GAUGE BASE CONNECTION NOTES:
1. CONNECTIONS SHOWN IN THIS DETAIL APPLY TO THE TOP OR BOTTOM OF TYPICAL SIMPLE SPANNING WALL STUDS SUBJECT TO WIND LOADING WHERE VERTICAL DEFLECTION ALLOWANCE IS NOT REQUIRED.
 2. SEE DETAILS FOR OTHER CONNECTIONS WHERE STUDS BYPASS SLAB EDGE OR SUPPORTING BEAMS OR WHERE HANGING SPANDREL TYPE CONDITIONS OCCUR.


TYP. LGS BASE CONNECTION DETAIL (D)
NO SCALE S201

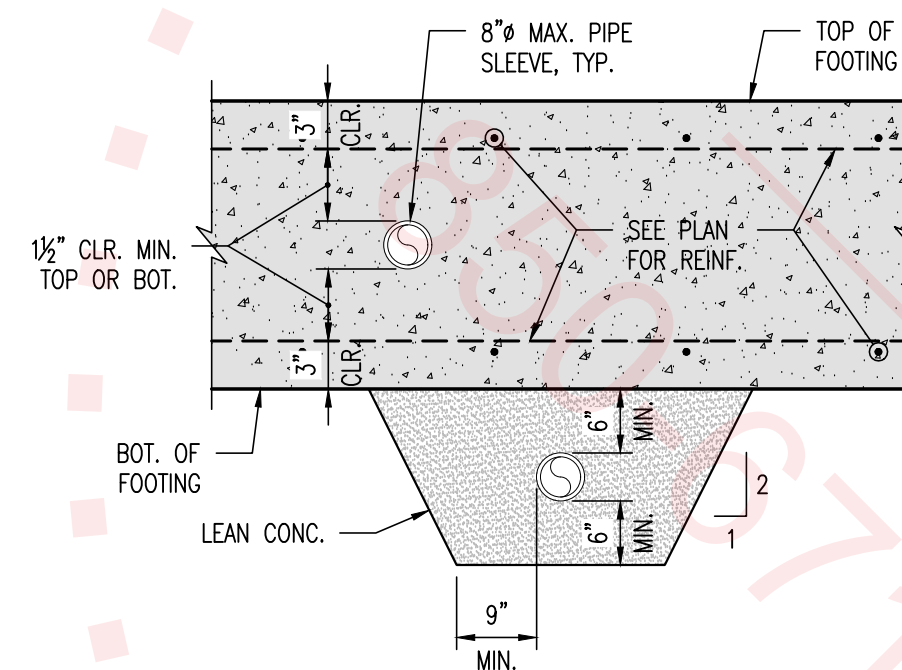

PIPE WITHIN OR BELOW FOOTING

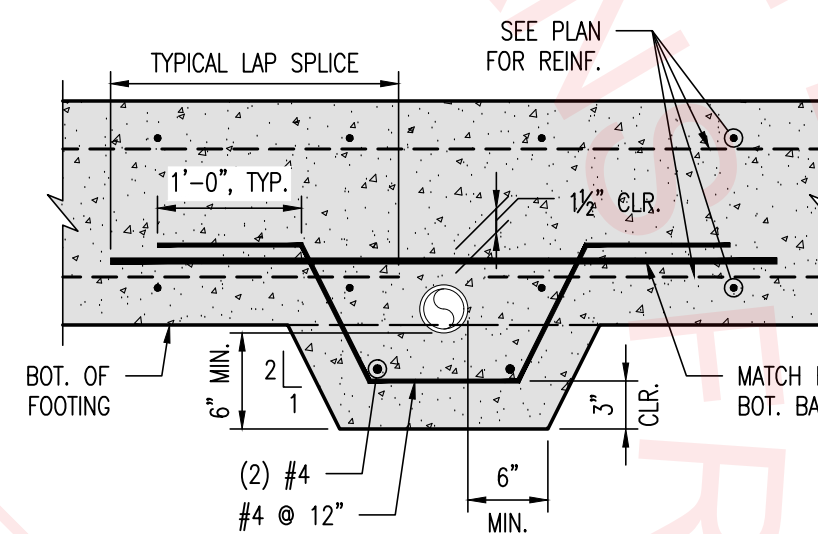

PIPE CONFLICTS WITH FOOTING REINFORCEMENT

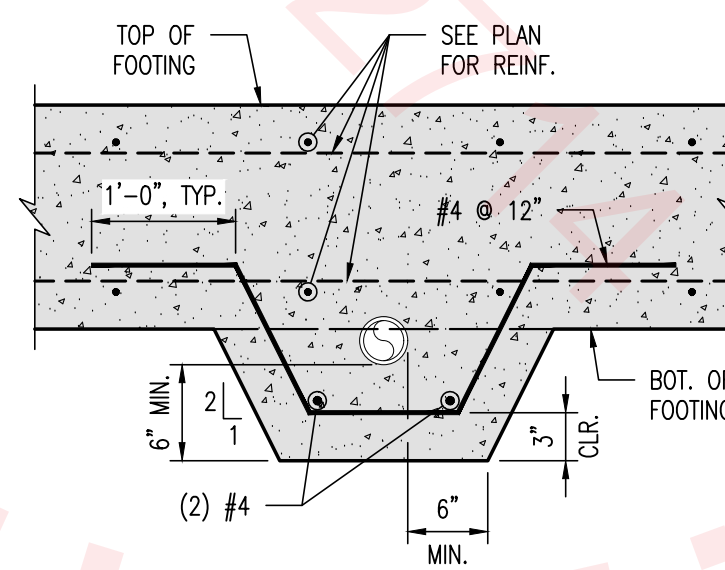


PIPE CONFLICTS WITH BOTTOM OF FOOTING


TYP. FOOTING PENETRATION DETAIL

SCALE: 1" = 1'-0"

E
S201

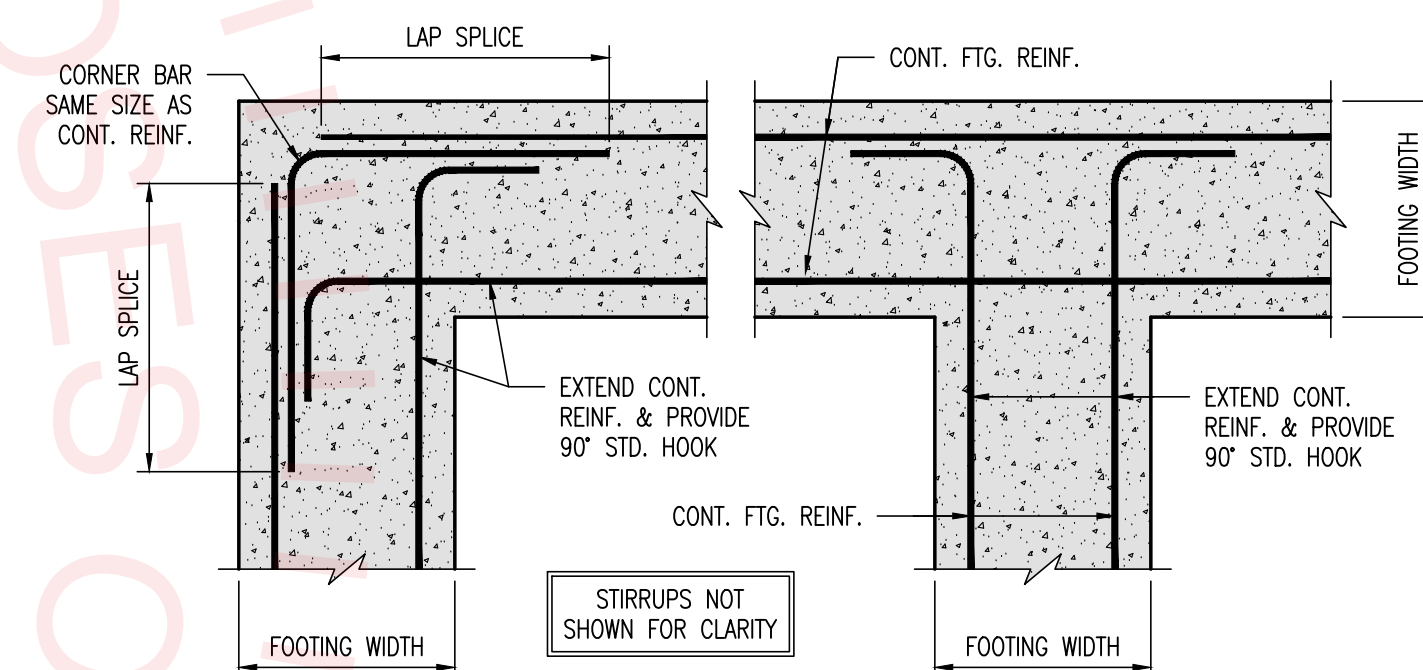

TYP. FOOTING INTERSECTION DETAIL (F)
SCALE: $\frac{3}{4}" = 1'-0"$ S20

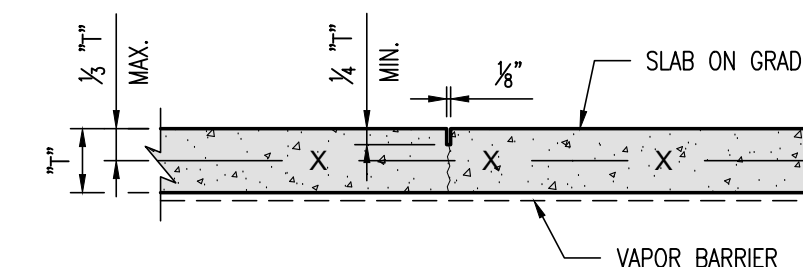

SAWCUT CONTROL JOINT (SCJ)
NOTE: SAWCUT SLAB WITHIN 12 HOURS OF POURING SLAB

SLAB ON GRADE JOINT

SCALE: 1" = 1'-0"

G
S20



ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite I Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

PRELIMINARY

NOT FOR
CONSTRUCTION

PANCARE OF FLORIDA, INC.
RENOVATIONS &
NEW CONSTRUCTION
FOR PANCARE - CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:

[illegible]

FOUNDATION DETAILS

PROJECT NUMBER	23071
DATED	11/03/2023

S201



23071 PRELIMINARY REVIEW SET 09/1/2023

© 2021 DAG ARCHITECTS, INC. ALL RIGHTS RESERVED. NO PART OF THIS DOCUMENT MAY BE COPIED, REPRODUCED OR TRANSMITTED BY ANY MEANS WITHOUT WRITTEN PERMISSION OF DAG ARCHITECTS, INC. THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY AND COPYRIGHT OF DAG ARCHITECTS, INC. AND SHALL NOT BE USED ON ANY OTHER PROJECT OR LOCATION EXCEPT AS DESCRIBED ON THE DRAWINGS. WITHOUT THE PRIOR WRITTEN AGREEMENT OF DAG ARCHITECTS.

STEEL STUD MANUFACTURERS ASSOCIATION (SSMA) MEMBER DESIGNATION

MEMBER DEPTH IN INCHES
(I.E. - 800=8", 600=6")

MEMBER THICKNESS IN MILLS (THOUSANDTHS OF AN INCH)

RETURN LIP

MEMBER DEPTH

FLANGE WIDTH

MEMBER TYPE
(S=STUD, T=TRACK)

FLANGE WIDTH OF MEMBER
(I.E. - 162=1½", 200=2")


STUD SECTION

TRACK SECTION

MILLS TO GAUGE CHART	
MILLS	GAUGE
33	20
43	18
54	16
68	14
97	12


600S162-54

CFS HEADER & JAMB SCHEDULE						
MARK	BEAM TYPE	JAMB TYPE	CONNECTION TYPE			COMMENTS
			BEAM-JAMB	JAMB-BASE	JAMB-TOP	
H1	B01	J01	(2) RCA225/54 [PATTERN 5B]	(2) RCA225/54 [PATTERN 5B]	(2) RCA225/54 [PATTERN 5B]	

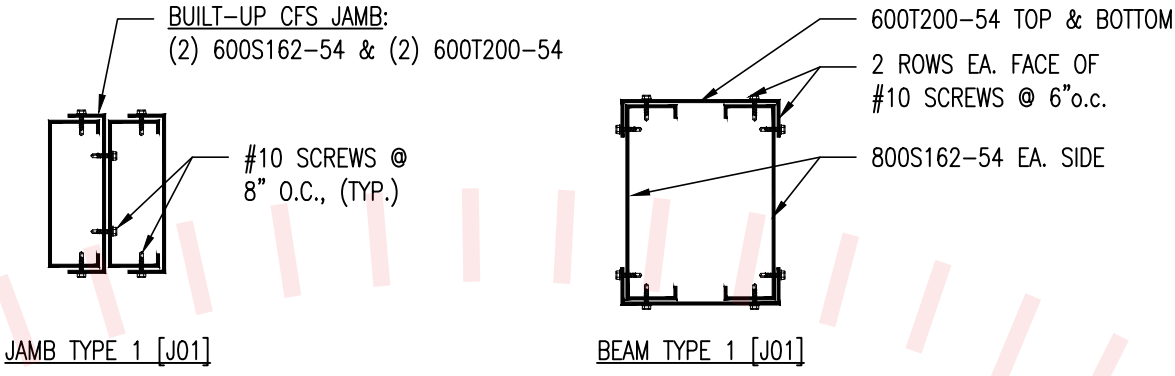


BUILT-UP MEMBER DETAIL
NO SCALE

C
S202

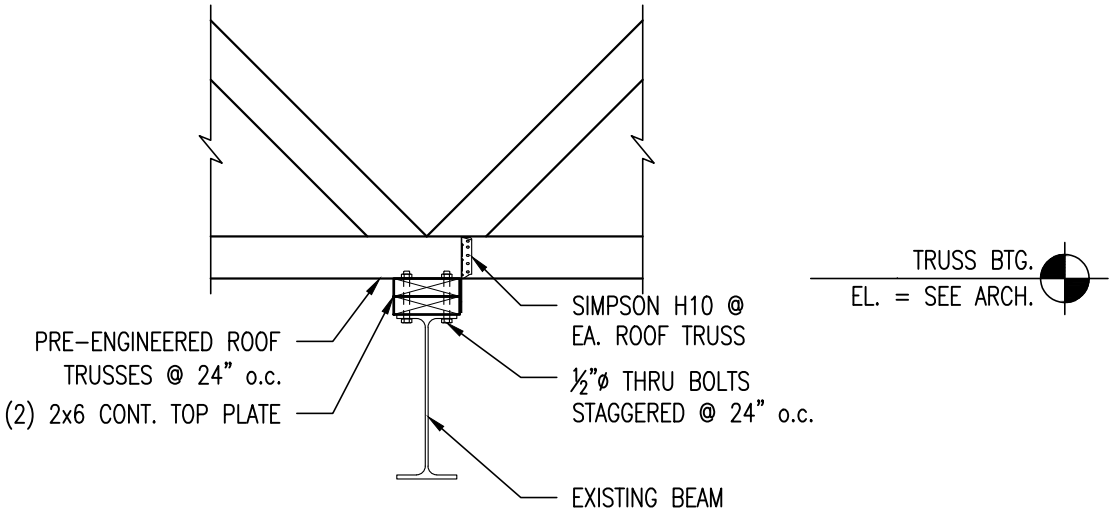

INTERIOR BEAM BEARING DETAIL
SCALE: ¾" = 1'-0"


G
S202

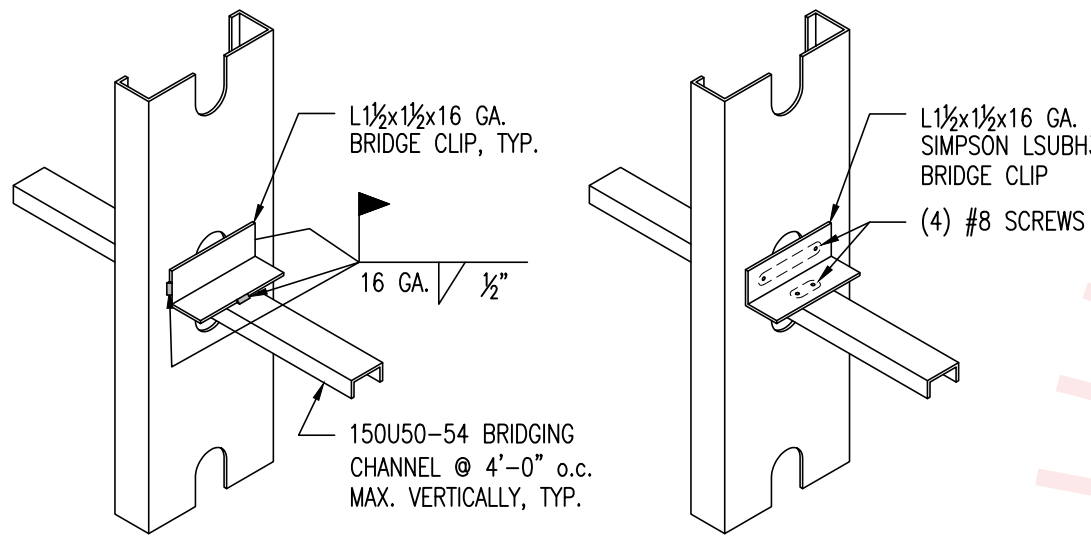

- LIGHT GAUGE BRIDGING NOTES:
- BRIDGING IS REQUIRED FOR LOADINGS APPLIED BEFORE SHEATHING IS ATTACHED TO BOTH FLANGES. BRIDGING PROVIDES RESISTANCE TO ROTATION CAUSED BY WIND LOADING AND RESISTANCE TO BOTH ROTATION AND MINOR AXIS BENDING CAUSED BY AXIAL LOADING.
 - BRIDGING SHALL BE EITHER WELDED OR SCREWED AS SHOWN IN THE DETAIL ABOVE.
 - BRIDGING SHALL BE INSTALLED HORIZONTALLY IN ALL LOAD-BEARING WALLS @ 4'-0" o.c. MAX.


TYP. LGS BRIDGING DETAIL
NO SCALE

A
S202

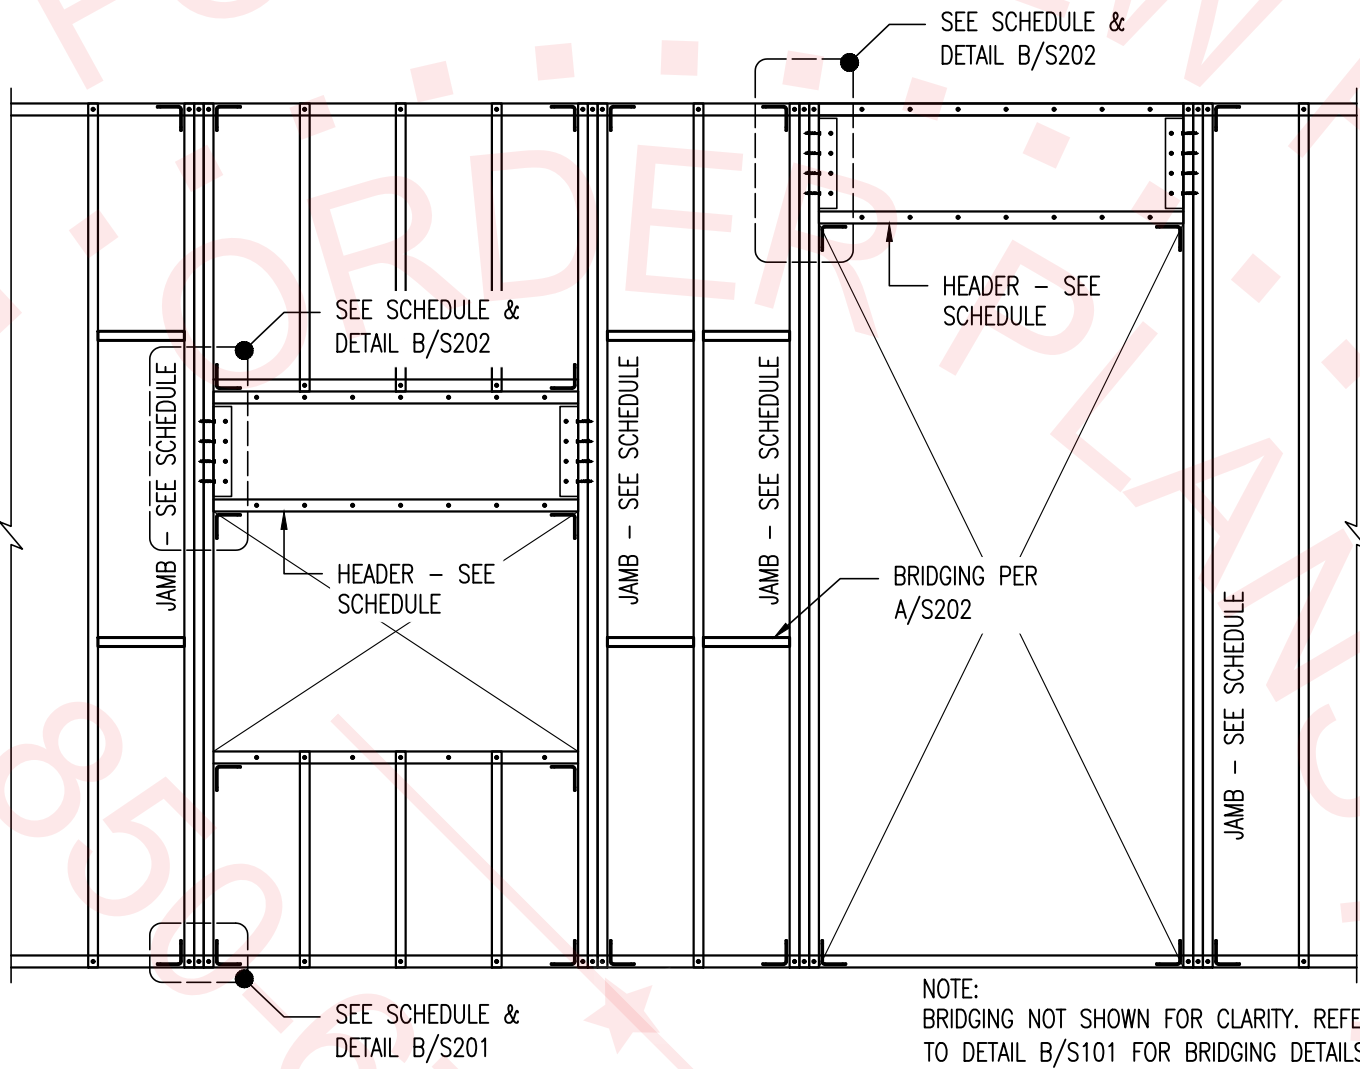


TYP. WALL ELEVATION
NO SCALE

D
S202

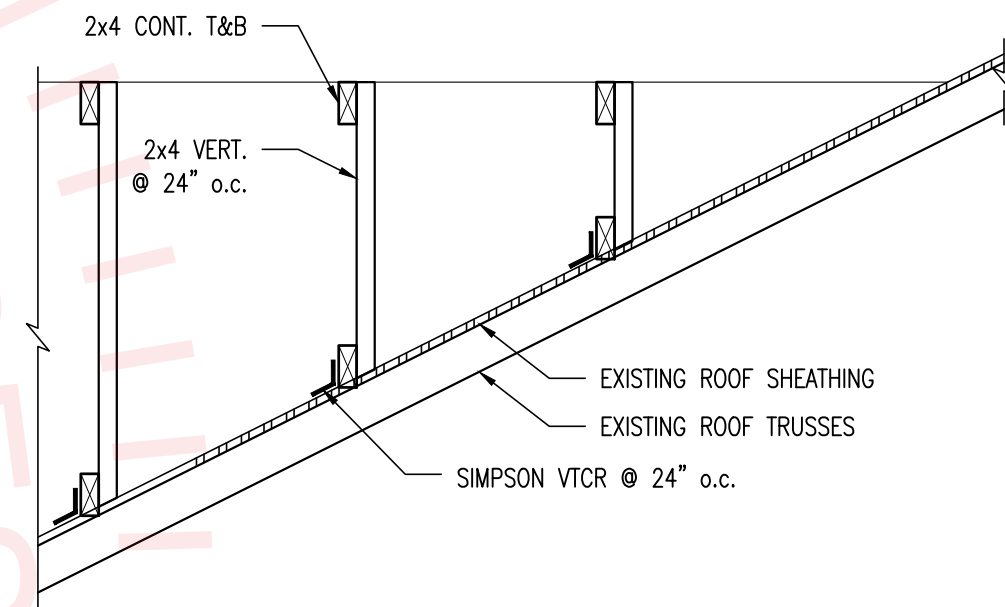


OVERFRAMING DETAIL
SCALE: ¾" = 1'-0"

H
S202

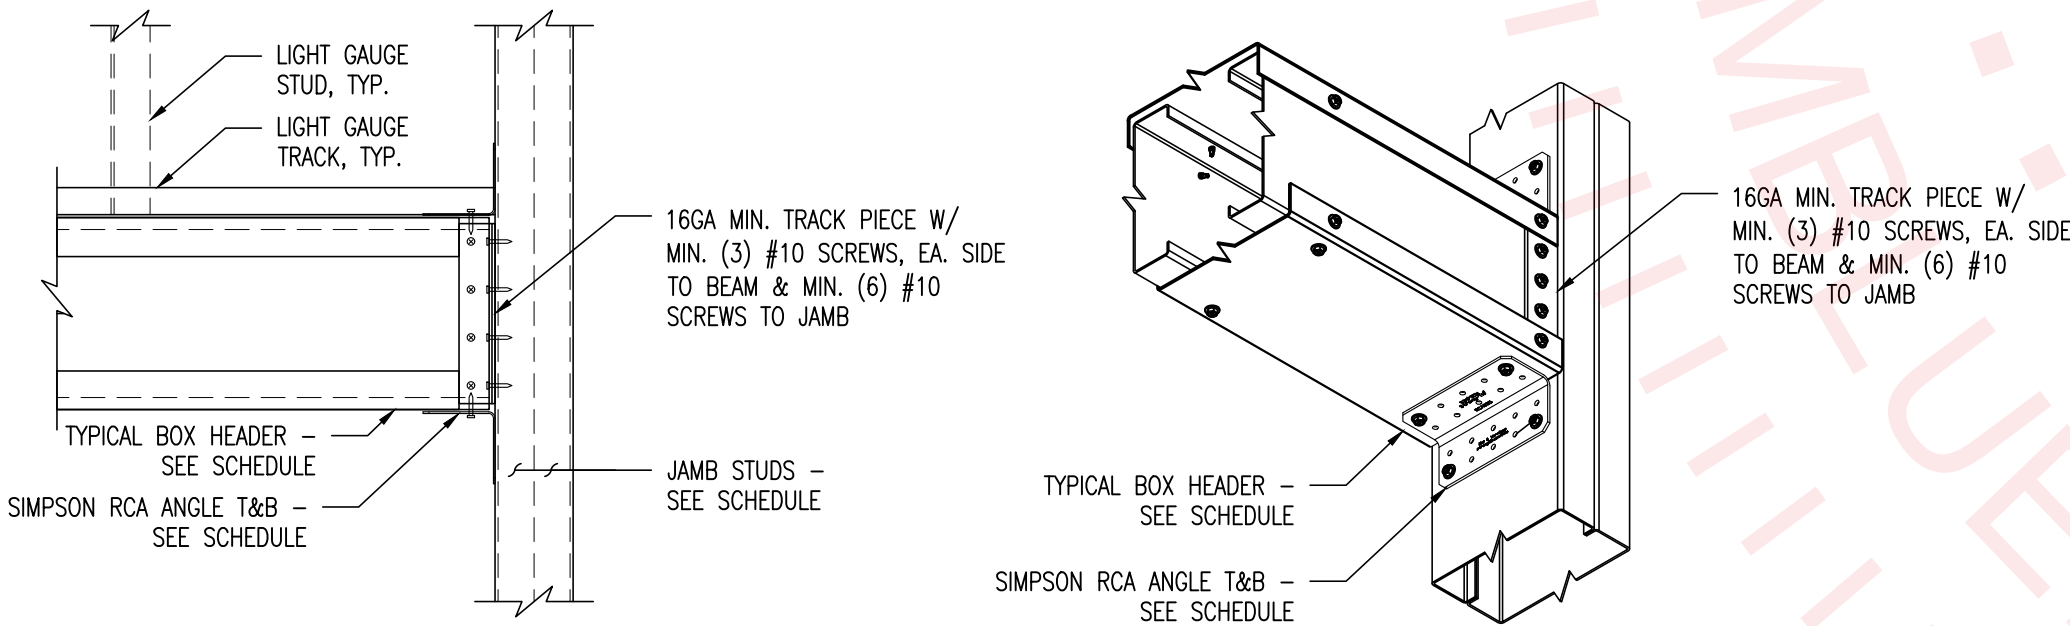


TYP. BEAM TO JAMB CONNECTION
NO SCALE

B
S202

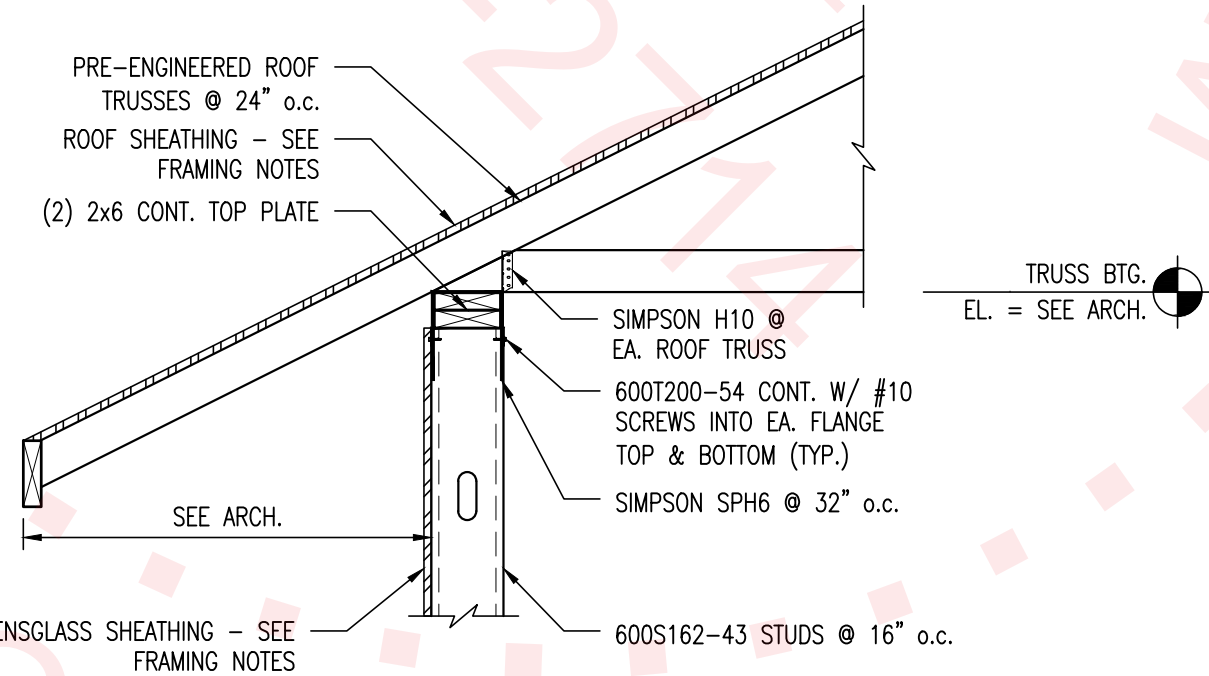


WALL BEARING DETAIL
SCALE: ¾" = 1'-0"

E
S202

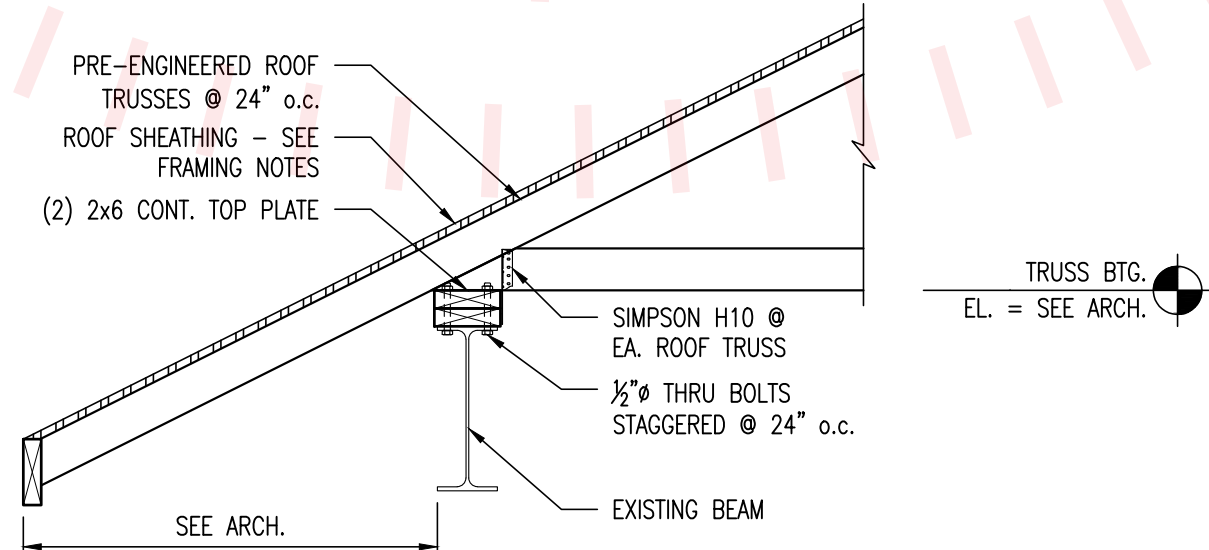

BEAM BEARING DETAIL
SCALE: ¾" = 1'-0"

F
S202

MODELS	PATTERN 3A	PATTERN 3B	PATTERN 3C		
RCA223/54 RCA223/68 RCA223/97 RAC333/54 RAC333/68 RAC333/97					
MODELS	PATTERN 5A	PATTERN 5B	PATTERN 5C	PATTERN 5D	PATTERN 5E
RCA225/54 RCA225/68 RCA225/97 RAC335/54 RAC335/68 RAC335/97					

SIMPSON RCA SCREW PATTERN CHART
NO SCALE

J
S202



DAG Architects AR0009694
455 Harrison Ave. Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

PRELIMINARY

NOT FOR
CONSTRUCTION

PANCARE OF FLORIDA, INC.
RENOVATIONS &
NEW CONSTRUCTION
FOR PANCARE - CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:



No.	Description	Date

STRUCUTRAL DETAILS

PROJECT NUMBER	23071
DATED	11/03/2023




S202

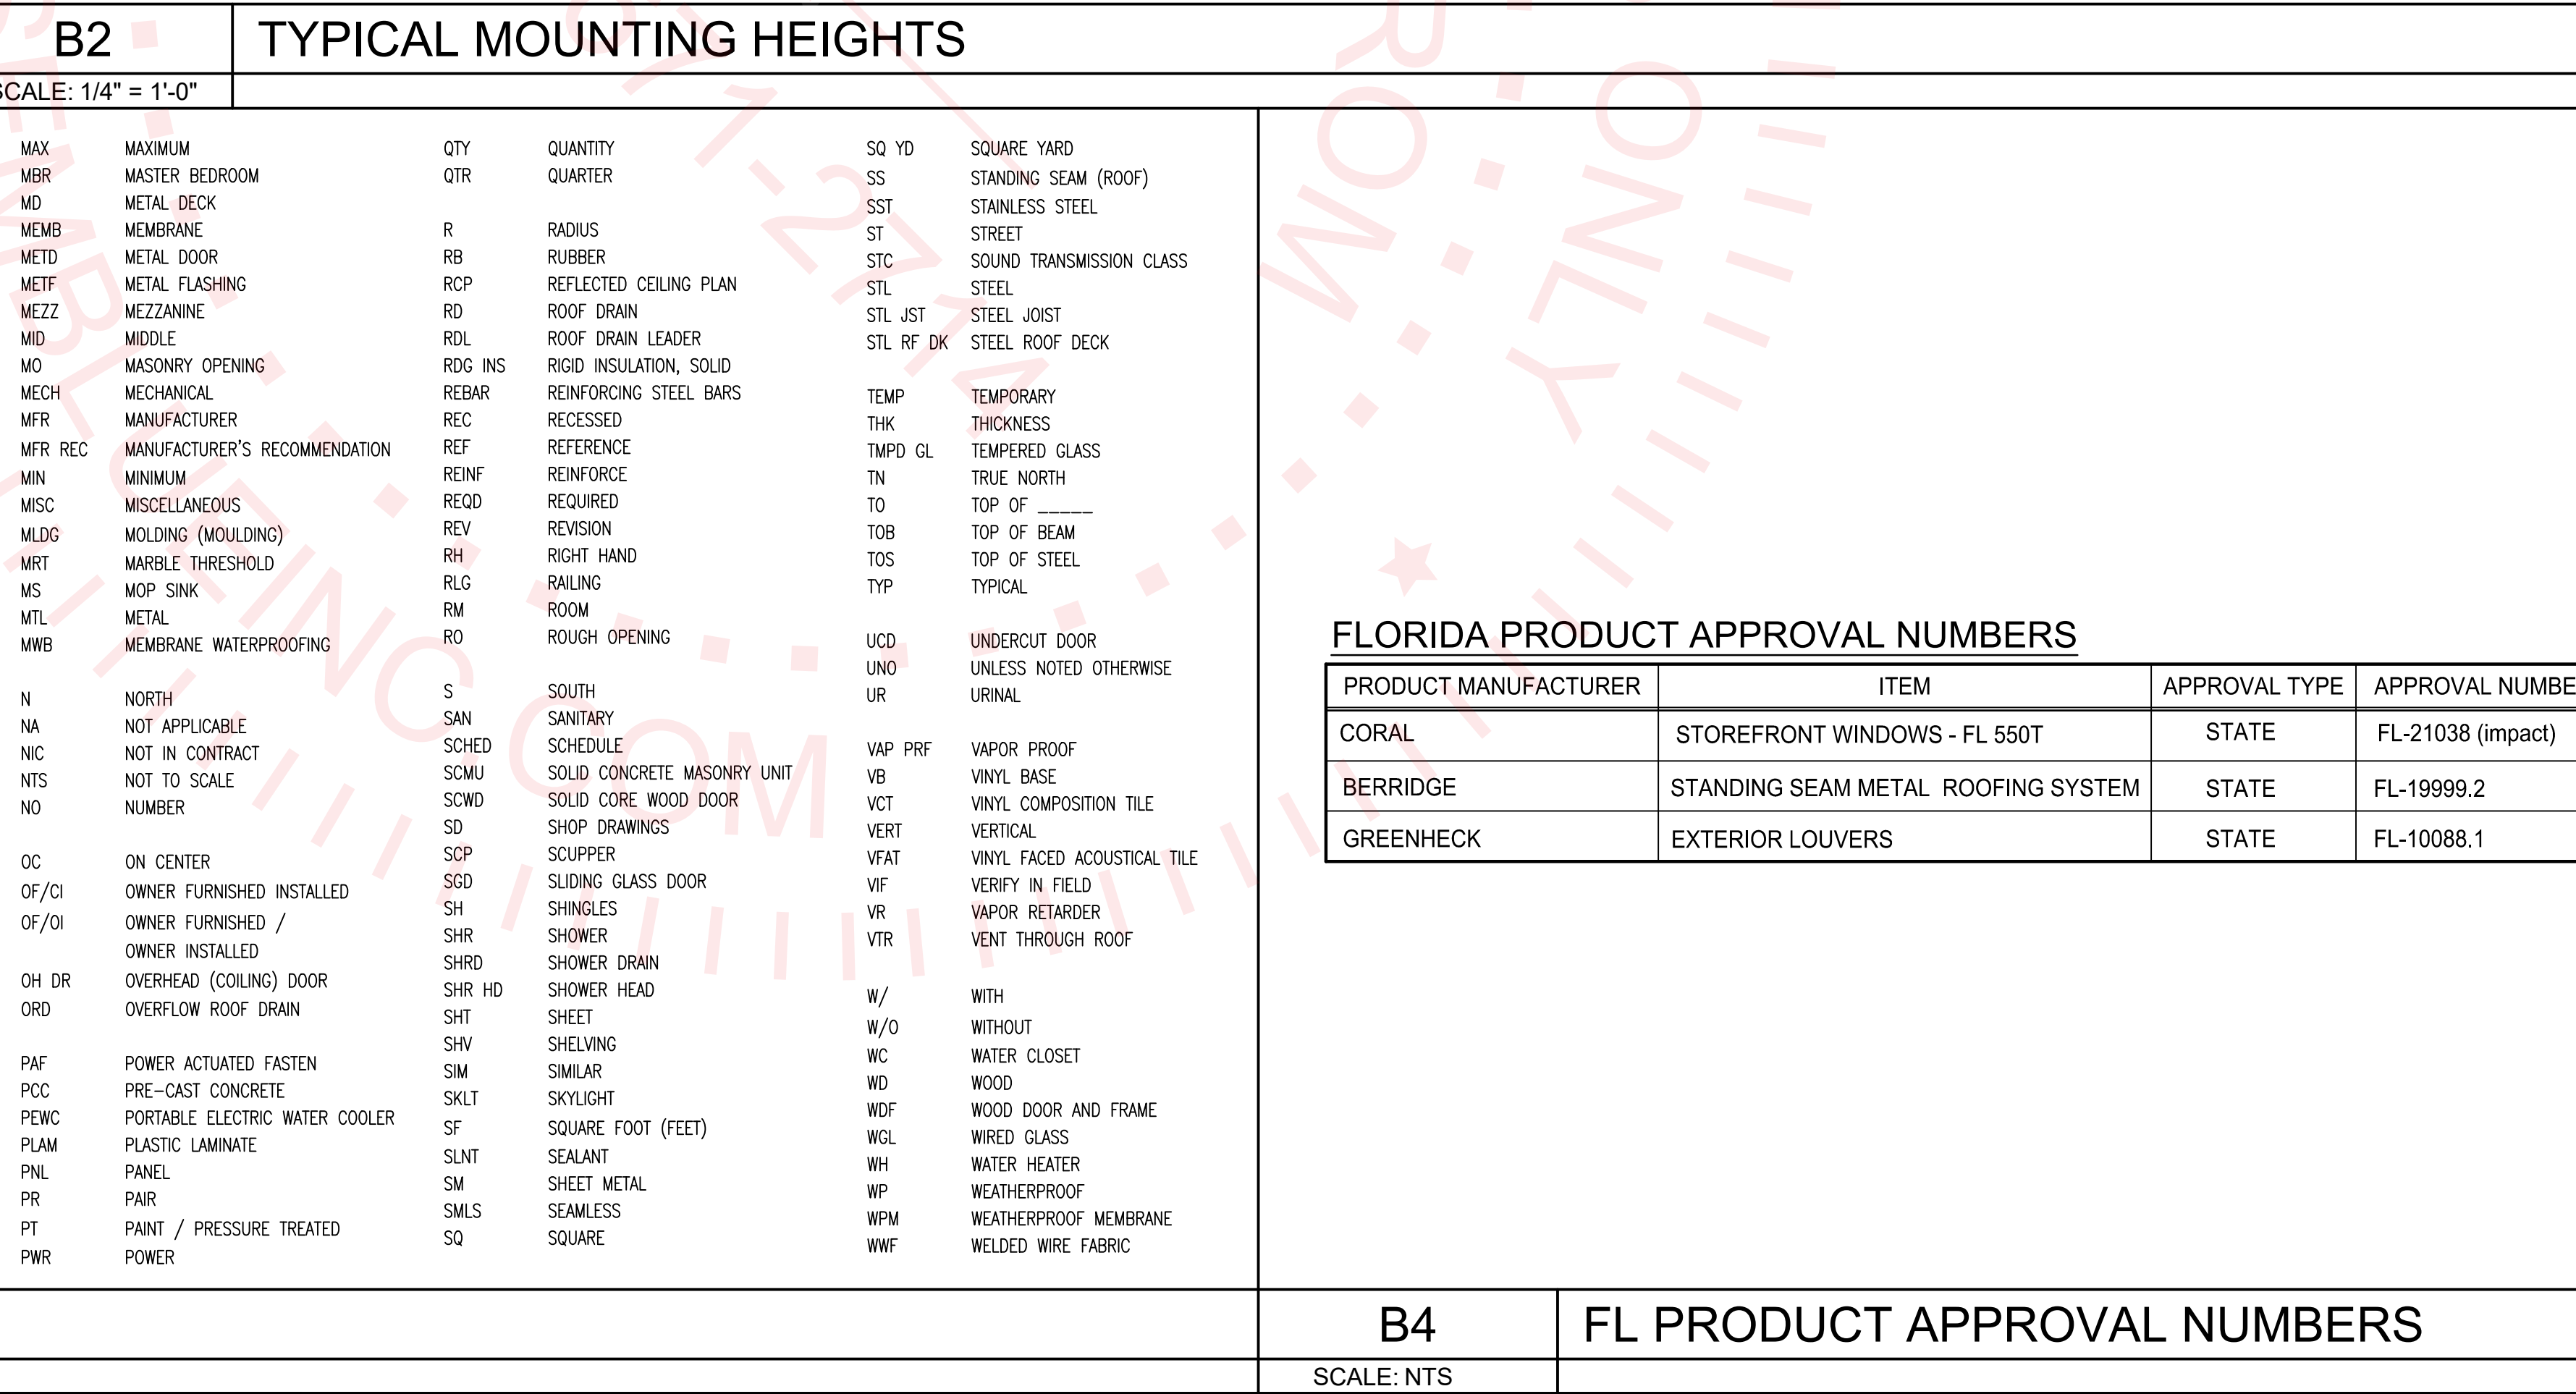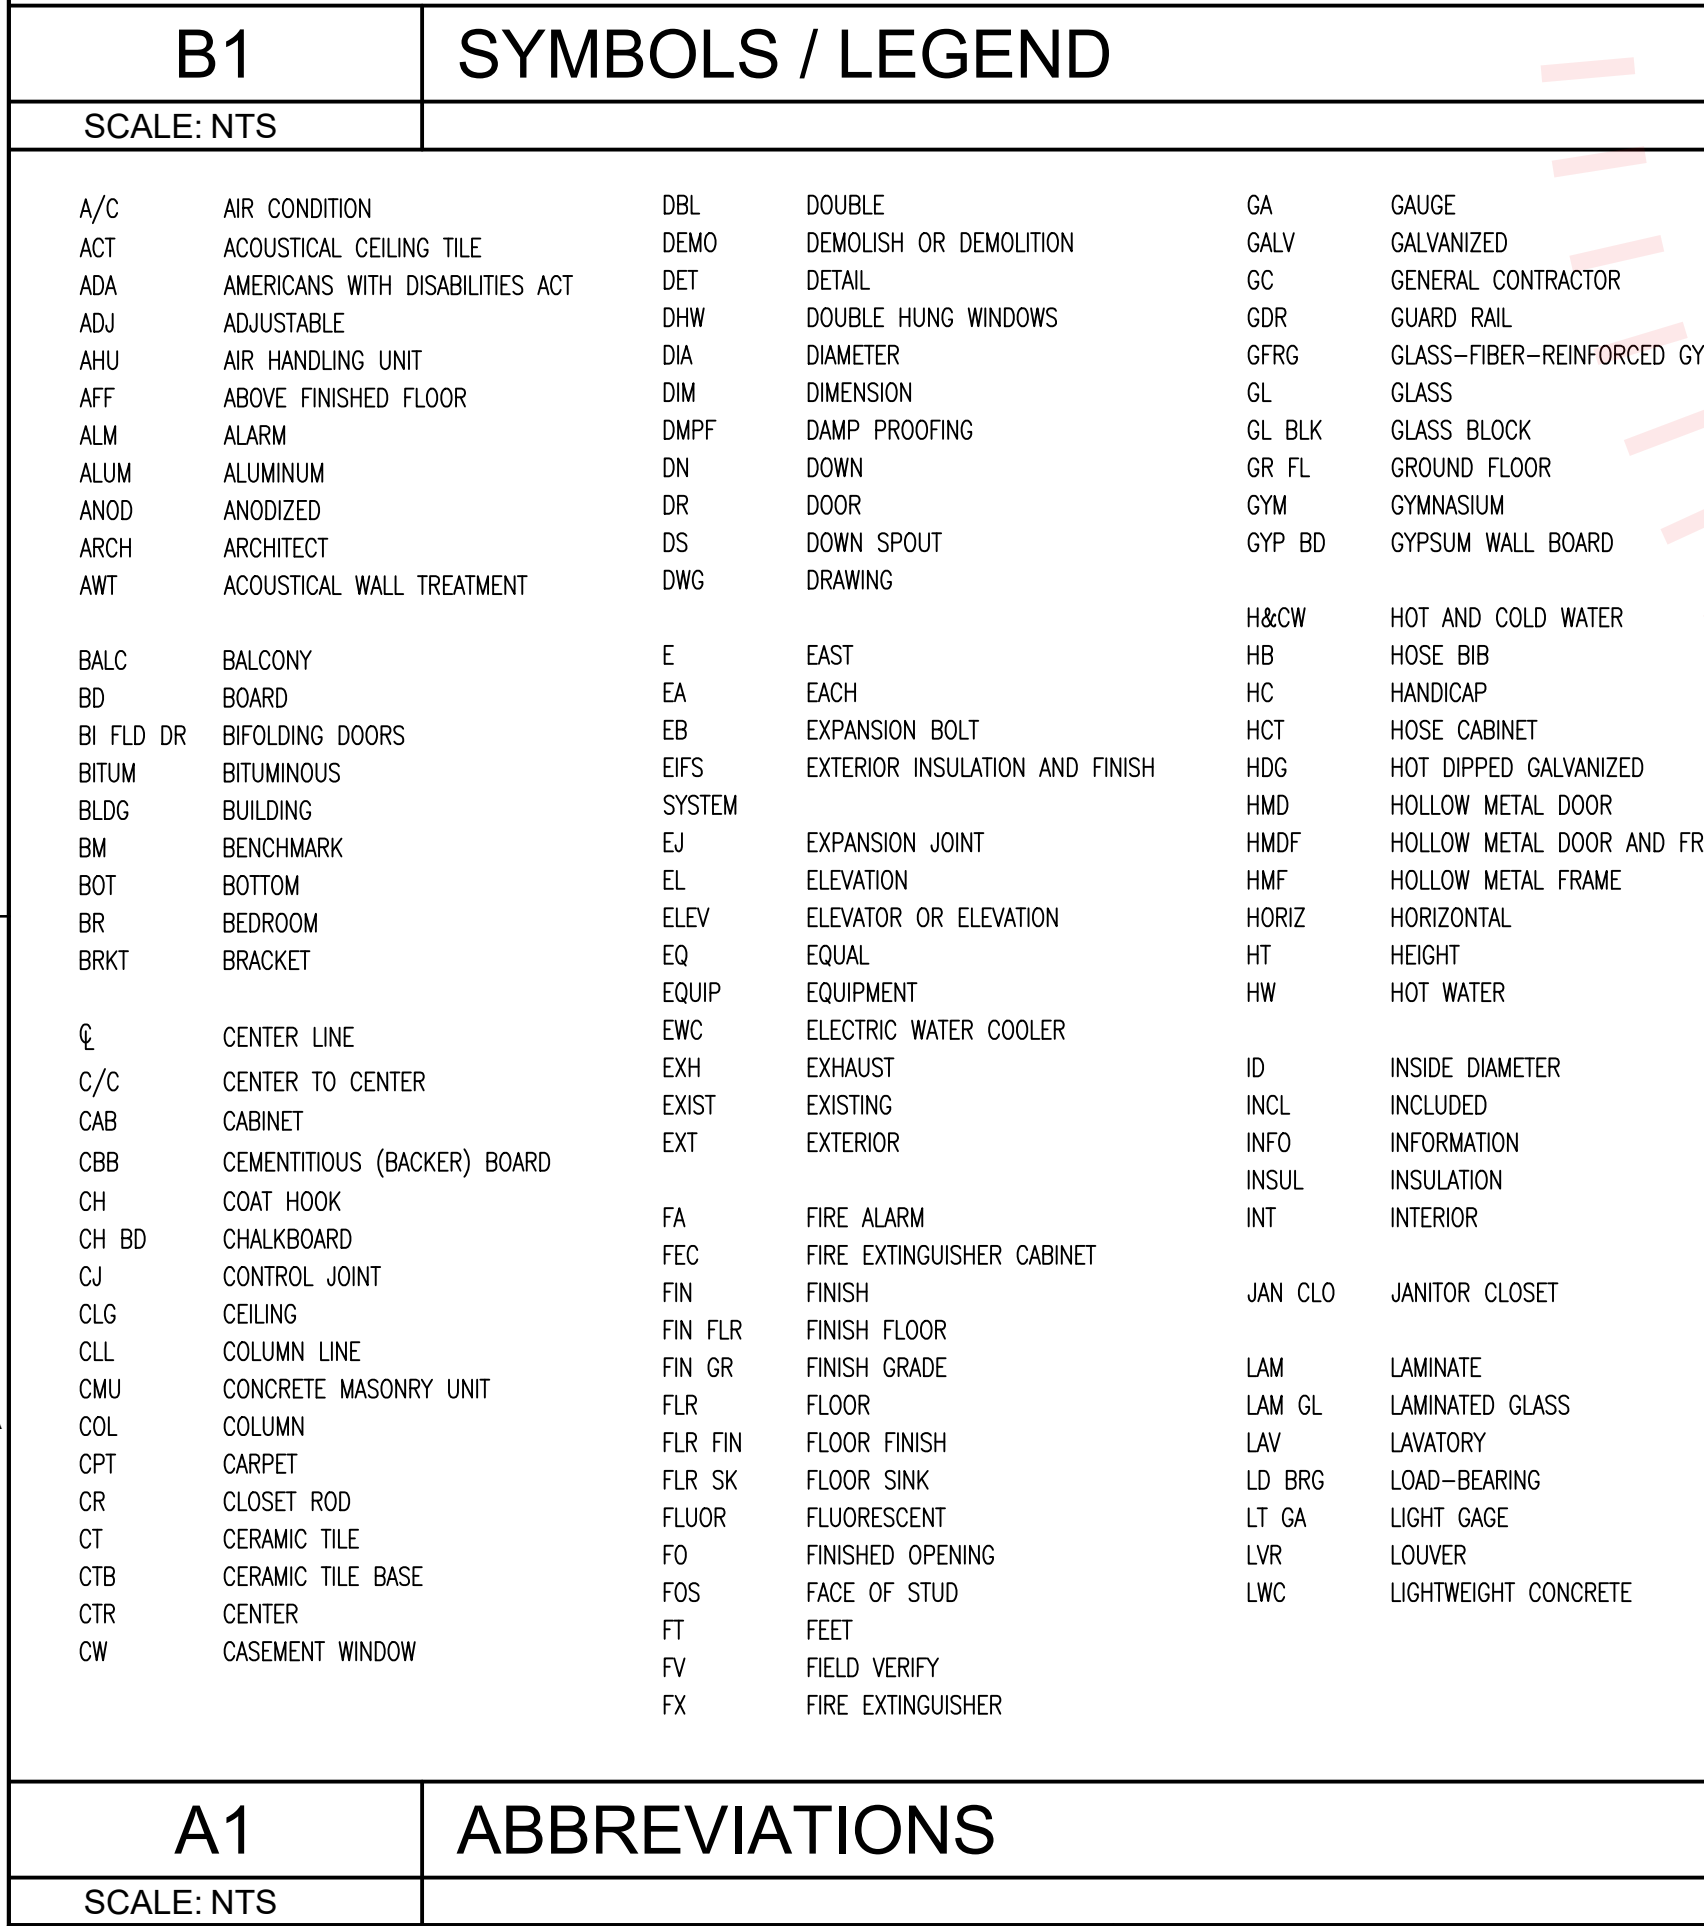[illegible]

A horizontal number line with arrows at both ends. There are two major tick marks labeled '4' and '5'. A single tick mark is placed exactly halfway between 4 and 5.

A-001

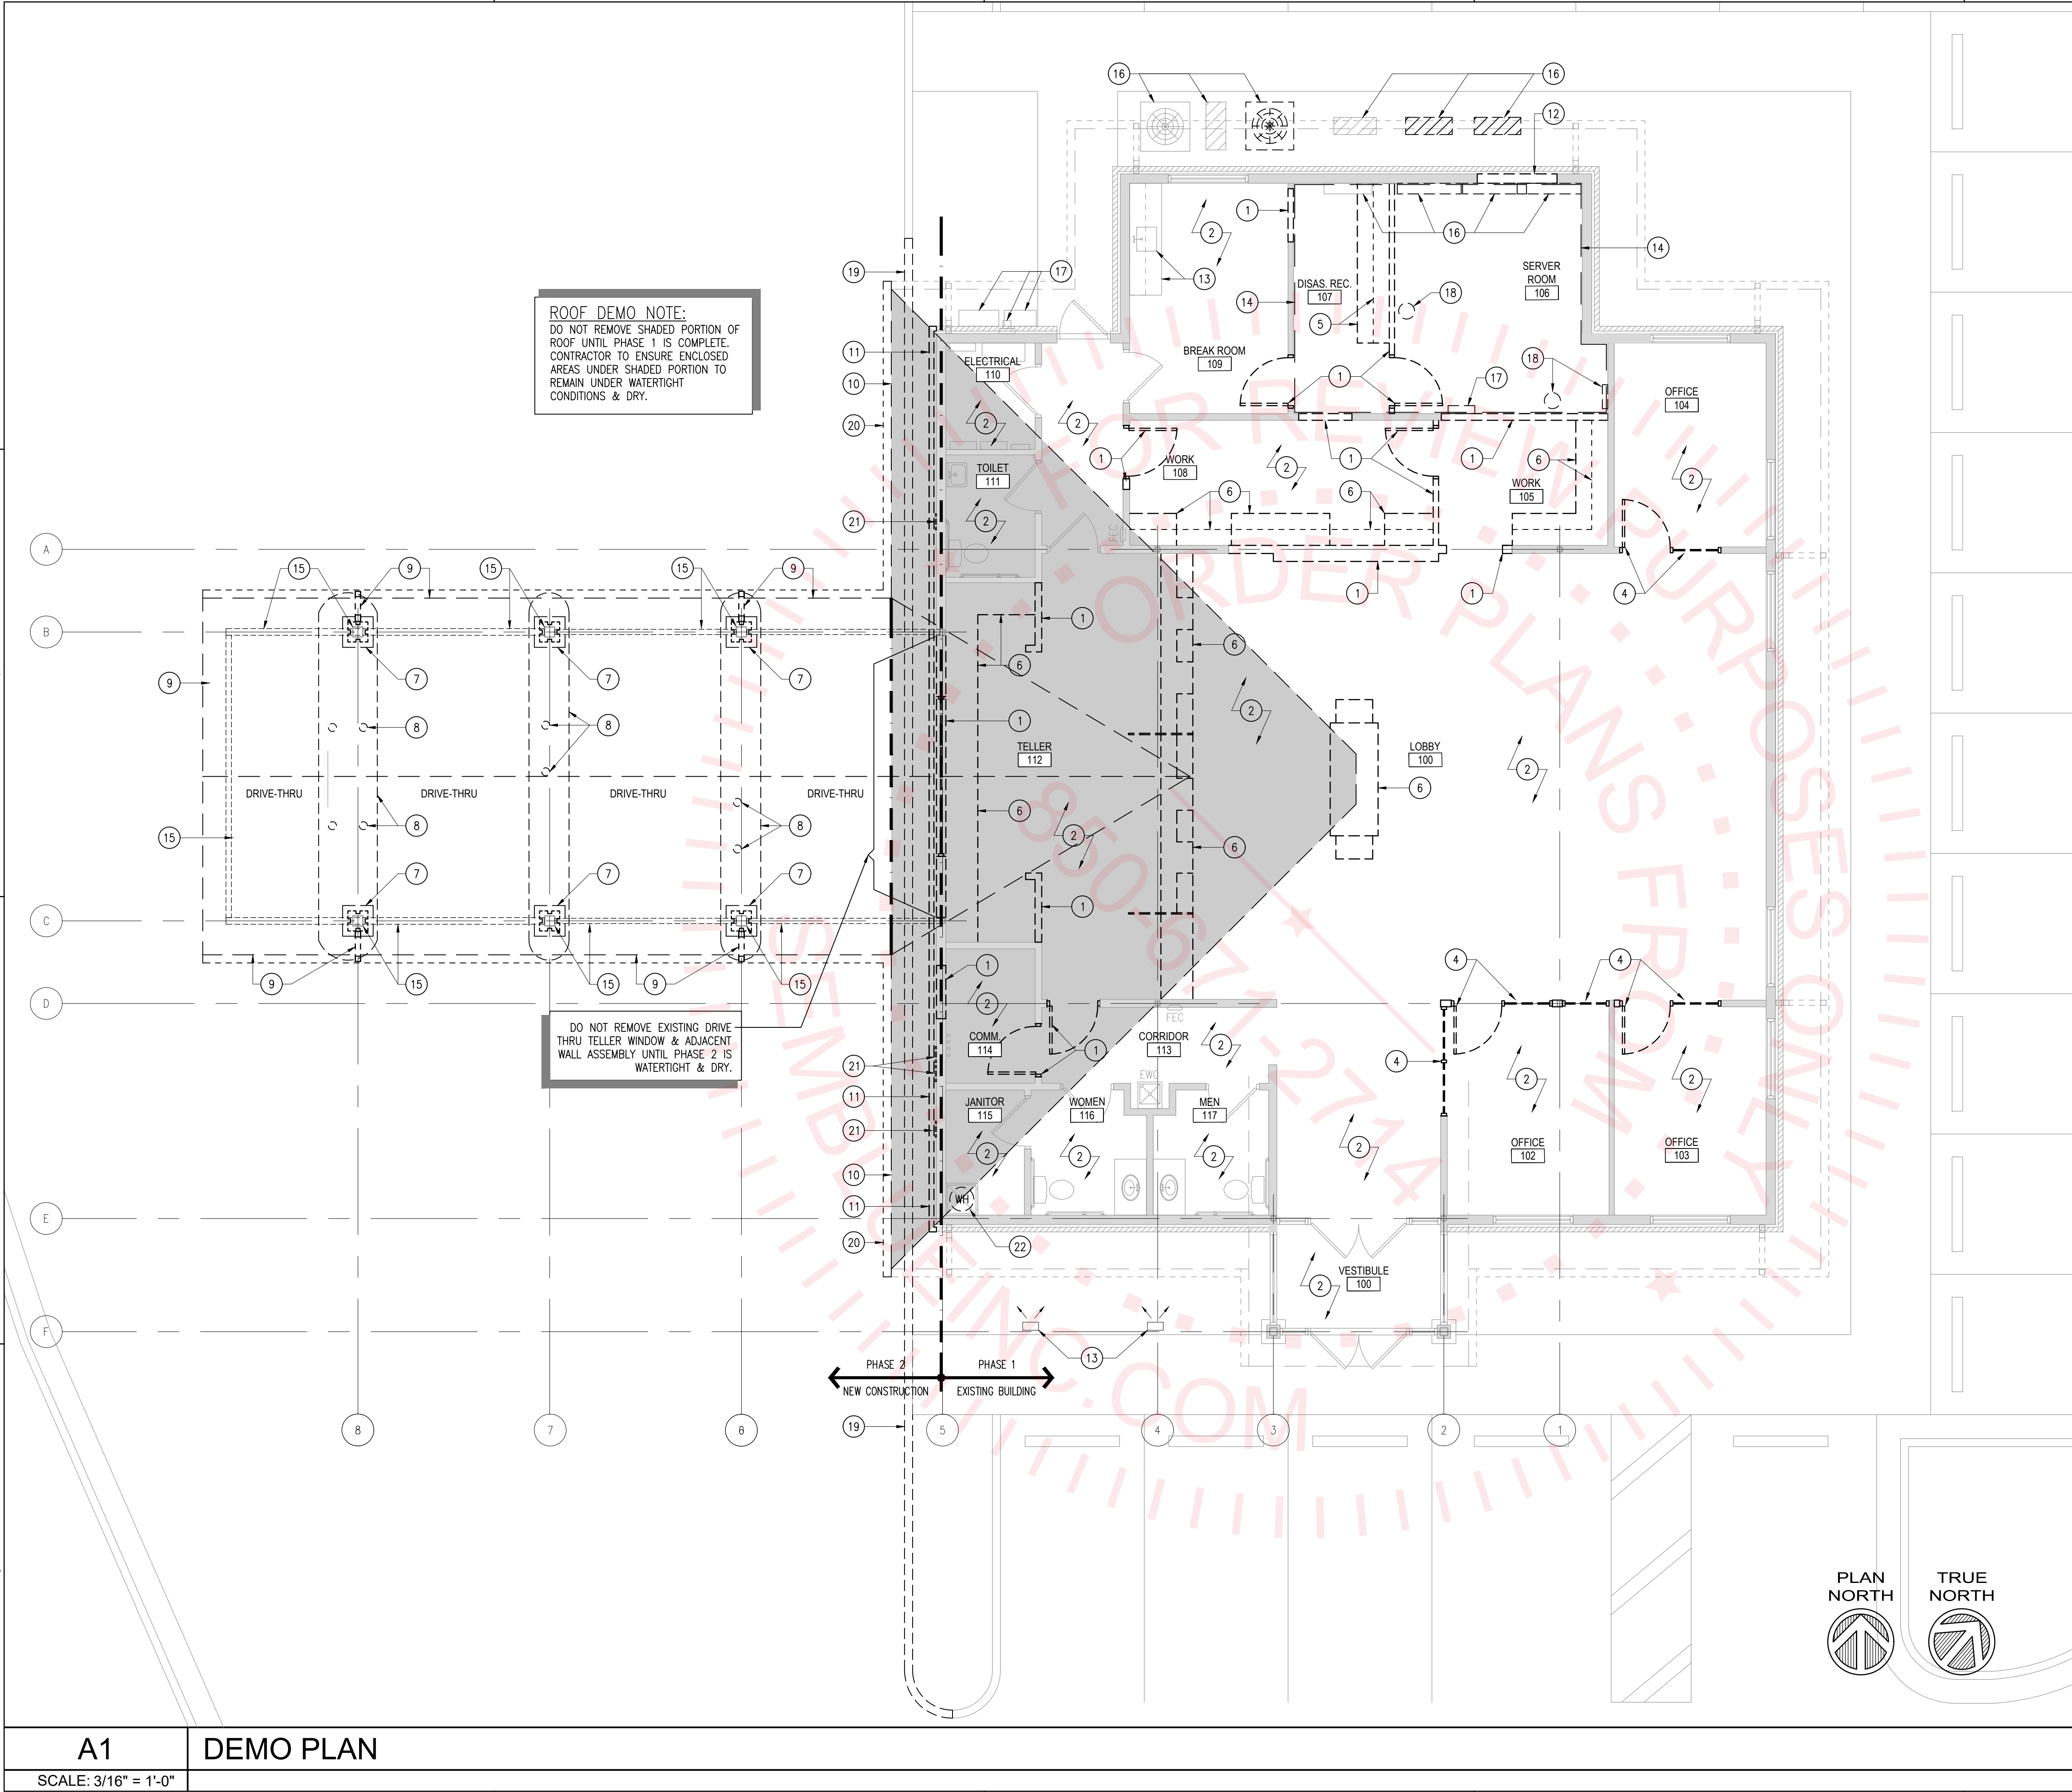

DEMO KEYNOTES:	
1	REMOVE EXISTING STUD WALL, DOOR, & WINDOW ASSEMBLY AS INDICATED.
2	REMOVE EXISTING FLOOR FINISHES.
3	NOT USED
4	REMOVE EXISTING DOOR & STORE FRONT ASSEMBLY; PATCH & REPAIR TO ACCEPT NEW WORK.
5	REMOVE EXISTING CABINETS & PLUMBING FIXTURES.
6	REMOVE EXISTING MILLWORK/CABINETS & ASSOCIATED EQUIPMENT.
7	REMOVE EXISTING COLUMN WRAP DOWN TO COLUMNS; COLUMNS & BEAMS TO REMAIN- CONTRACTOR TO PROTECT EXISTING COLUMNS & BEAMS FROM HARM.
8	REMOVE EXISTING DRIVE-THRU ISLANDS, INCLUDING BUT NOT LIMITED TO CONCRETE, BOLLARDS, EQUIPMENT, CONDUITS, ETC.
9	REMOVE EXISTING DRIVE-THRU CANOPY, INCLUDING BUT NOT LIMITED TO CANOPY ROOF, TRUSSES, GUTTER, DOWNSPOUT, MISC. ELECTRICAL COMPONENTS, ETC. CONTRACTOR TO PROTECT REMAINING STRUCTURAL COMPONENTS FROM DAMAGE DURING & AFTER DEMOLITION.
10	REMOVE EXISTING ROOFING COMPONENTS DOWN TO ROOF DECK; CONTRACTOR TO PROTECT EXISTING TRUSSES & ROOF DECK FROM DAMAGE DURING DEMOLITION & AFTER, PROVIDE WEATHER TIGHT PROTECTION UNTIL NEW ROOF CAN BE CONNECTED/DRIED IN.
11	REMOVE EXISTING EXTERIOR WALL FINISHES & BRICK WAINSCOT TO FACE OF STUD.
12	REMOVE EXISTING WALL FRAMING & FINISHES AS REQUIRE TO ACCEPT NEW WINDOW ASSEMBLY.
13	EXISTING TO REMAIN; REFER TO ELECTRICAL BUILDING SIGNAGE LIGHTING.
14	REMOVE EXISTING RAISED FLOOR ASSEMBLY. DASHED LINE INDICATES EXTENTS OF RAISED FLOOR.
15	STRUCTURAL STEEL TO REMAIN, UNLESS OTHERWISE NOTED- SEE STRUCTURAL DRAWINGS.
16	EXISTING HVAC EQUIPMENT- REFER TO MECHANICAL DRAWINGS
17	EXISTING ELECTRICAL EQUIPMENT- REFER TO ELECTRICAL DRAWINGS
18	REMOVE EXISTING SERVER ROOM FIRE PROTECTION EQUIPMENT AND PANEL.
19	REMOVE EXISTING CONCRETE CURB AS REQUIRED- REFER CIVIL DRAWINGS
20	REMOVE EXISTING GUTTER AS REQUIRED.
21	REMOVE EXISTING WALL MOUNTED EXHAUST LOUVER- REFER TO MECHANICAL DRAWINGS
22	REMOVE EXISTING WATER HEATER- REFER TO MECHANICAL DRAWINGS

DEMO NOTES:	
1.	CONTRACTOR TO COORDINATE REMOVE OF ELECTRICAL ITEMS W/ OWNER'S REPRESENTATIVE FOR POSSIBLE SALVAGE PRIOR TO DEMOLITION/DISPOSAL.
2.	ITEMS DECLARED SALVAGEABLE/REUSABLE TO BE PROTECTED FROM HARM DURING DEMOLITION & STORED IN A SAFE/SECURE LOCATION.
3.	SALVAGED/REUSED ITEMS TO BE CLEANED/PREPARED TO "LIKE NEW" CONDITION PRIOR TO INSTALLATION.
4.	PLUMBING DEMOLITION TO INCLUDE, BUT NOT LIMITED TO REMOVAL OF PLUMBING FIXTURES, SUPPLY, WASTE, & VENT PIPING, ETC.
5.	ELECTRICAL DEMOLITION TO INCLUDE, BUT NOT LIMITED TO REMOVAL OF ELECTRICAL CONDUIT, WIRING, FIXTURES, ETC.
6.	CONTRACTOR TO COORDINATE THE DEMOLITION & REMOVAL OF FRAMING, WALLS, FLOOR, & CEILING FINISHES, DOORS, WINDOWS, & OTHER ELEMENTS.

DAG

ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.

RENOVATIONS & NEW CONSTRUCTION

FOR PANCARE CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428


PanCARE
OF FLORIDA, INC.




REVISIONS:		
No.	Description	Date

DEMOLITION PLAN

PROJECT NUMBER	23071
DATED	02/05/2023

AD-101

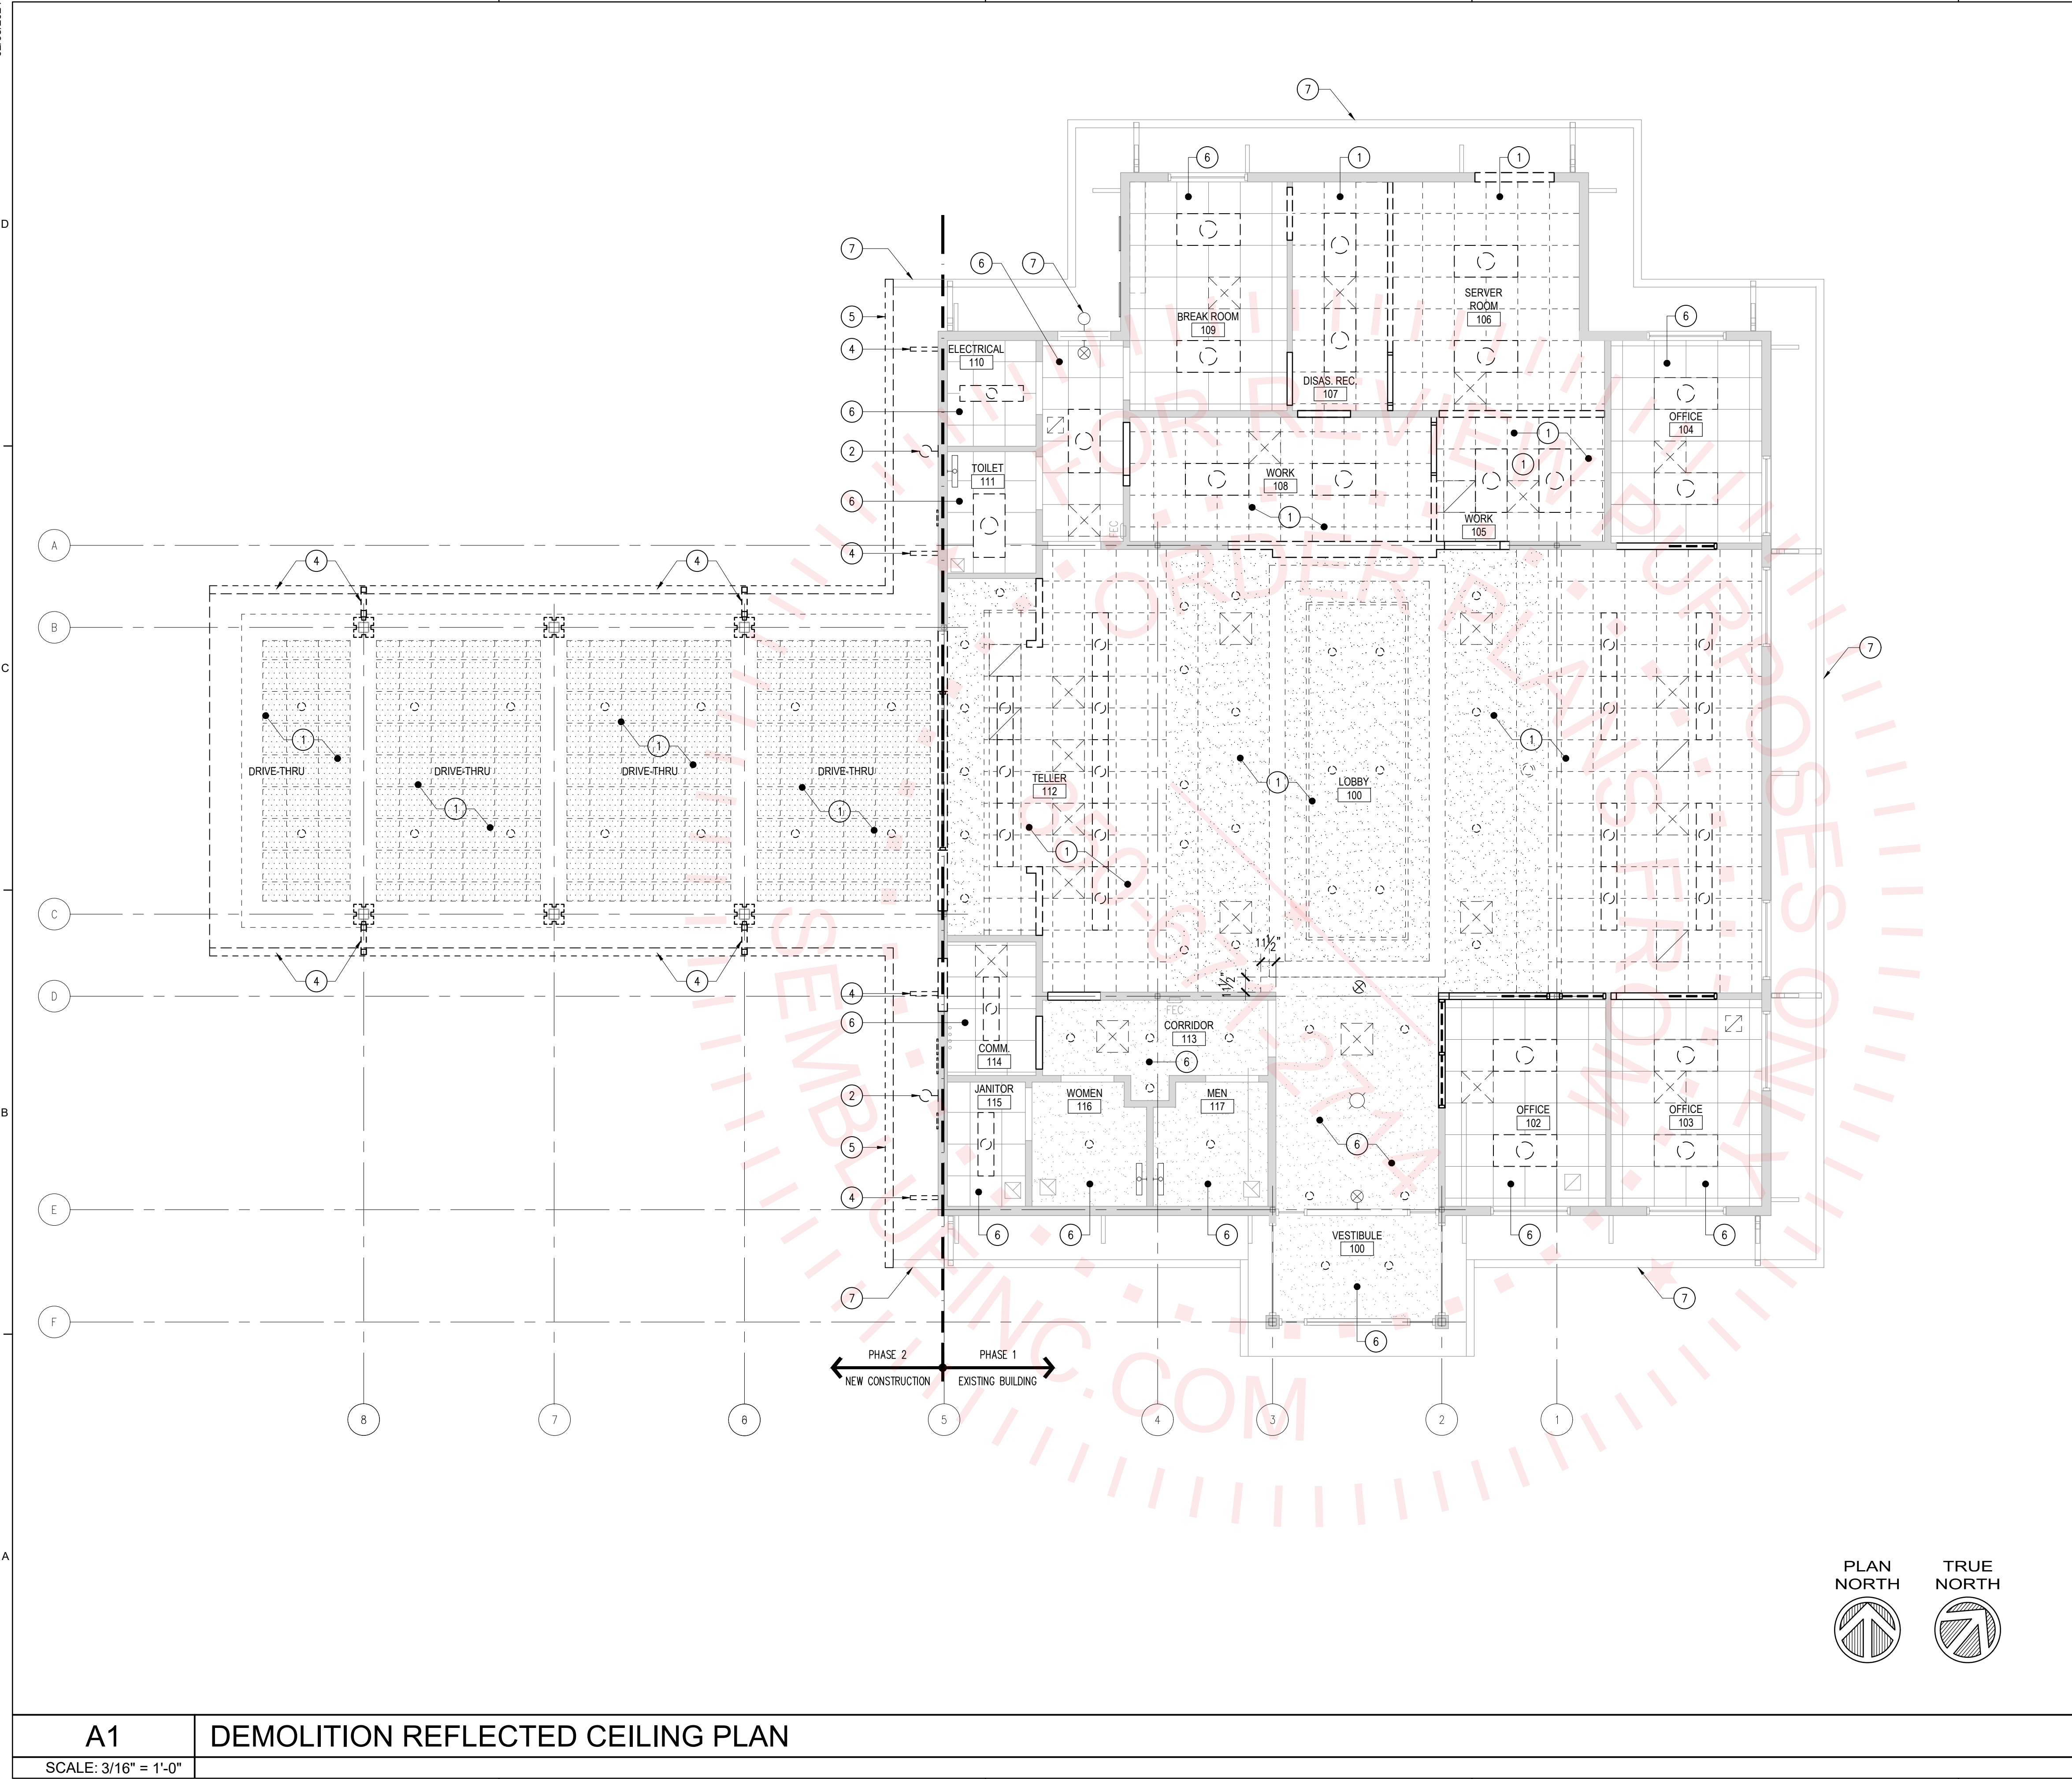

	EXPOSED STRUCTURE (NO CEILING) WALLS TO EXTEND TO UNDERSIDE OF STRUCTURE
	SUSPENDED ACOUSTICAL CEILING TILE
	GYPSUM BOARD CEILING OR SOFFIT
	WALL MOUNTED FIXTURE-- REFER TO ELECTRICAL DWGS
	RECESSED CAN LIGHT-- REFER TO ELECTRICAL DWGS
	RECESSED 2x4 LIGHT FIXTURE-- REFER TO ELECTRICAL DRAWINGS
	RECESSED 2x2 LIGHT FIXTURE-- REFER TO ELECTRICAL DRAWINGS
	SURFACE MOUNTED LED LIGHT FIXTURE-- REFER TO ELECTRICAL DRAWINGS
	WALL MOUNTED EXIT LIGHT-- REFER TO ELECTRICAL DWGS
	CEILING MTD. EXIT LIGHT w/DIRECTIONAL ARROW-- REFER TO ELECTRICAL DRAWINGS
	WALL MOUNTED EXIT LIGHT-- REFER TO ELECTRICAL DRAWINGS
	HVAC EXHAUST AIR GRILLE-- REFER TO MECHANICAL DWGS
	HVAC RETURN AIR GRILLE-- REFER TO MECHANICAL DWGS
	HVAC SUPPLY DIFFUSER-- REFER TO MECHANICAL DWGS

C5	LEGEND
SCALE: NTS	

GENERAL RCP NOTES:


1. SEE FINISH SCHEDULE FOR CEILING HEIGHTS.
2. REFER TO ELECTRICAL DOCUMENTS FOR SPECIFIC FIXTURE TYPES.
3. REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
4. DASHED LINES INDICATE ITEMS TO BE DEMO'D OR RELOCATED.
5. REFER TO SHEET AD-101 FOR ADDITIONAL INFORMATION.

DEMO KEYNOTES:

- ① REMOVE EXISTING CEILING ASSEMBLY, INCLUDING BUT NOT LIMITED TO CEILING FINISHES, LIGHT FIXTURES, MECHANICAL GRILLES/DIFFUSERS; PREP TO ACCEPT NEW WORK.
- ② REMOVE EXISTING WALL MOUNTED LIGHT FIXTURE-- REFER TO ELECTRICAL DRAWINGS
- ③ REMOVE SOFFIT MOUNTED LIGHT FIXTURE-- REFER TO ELECTRICAL DRAWINGS
- ④ REMOVE EXISTING BRACKETS-- SAVE FOR RE-USE; REFER TO EXTERIOR ELEVATIONS FOR NEW LOCATIONS
- ⑤ REMOVE GUTTER/DOWNSPOUT AS REQUIRED
- ⑥ EXISTING CEILING TO REMAIN, REPLACE BROKEN &/OR STAINED TILES.
- ⑦ EXISTING TO REMAIN


A5	NOTES
SCALE: NTS	

 DAG ARCHITECTS DAG Architects AR0009694 355 Harrison Ave Suite 1 Panama City, FL 32401 850.387.1671 www.DAGarchitects.com		
BID DOCUMENTS		
PANCARE OF FLORIDA, INC. RENOVATIONS & NEW CONSTRUCTION FOR PANCARE CHIPLEY 1440 MAIN ST., CHIPLEY, FL 32428		
 PAN CARE OF FLORIDA, INC.		
REVISIONS:		
No.	Description	Date
DEMOLITION REFLECTED CEILING PLAN		
PROJECT NUMBER		23071
DATED		02/05/2023
AD-101.1		

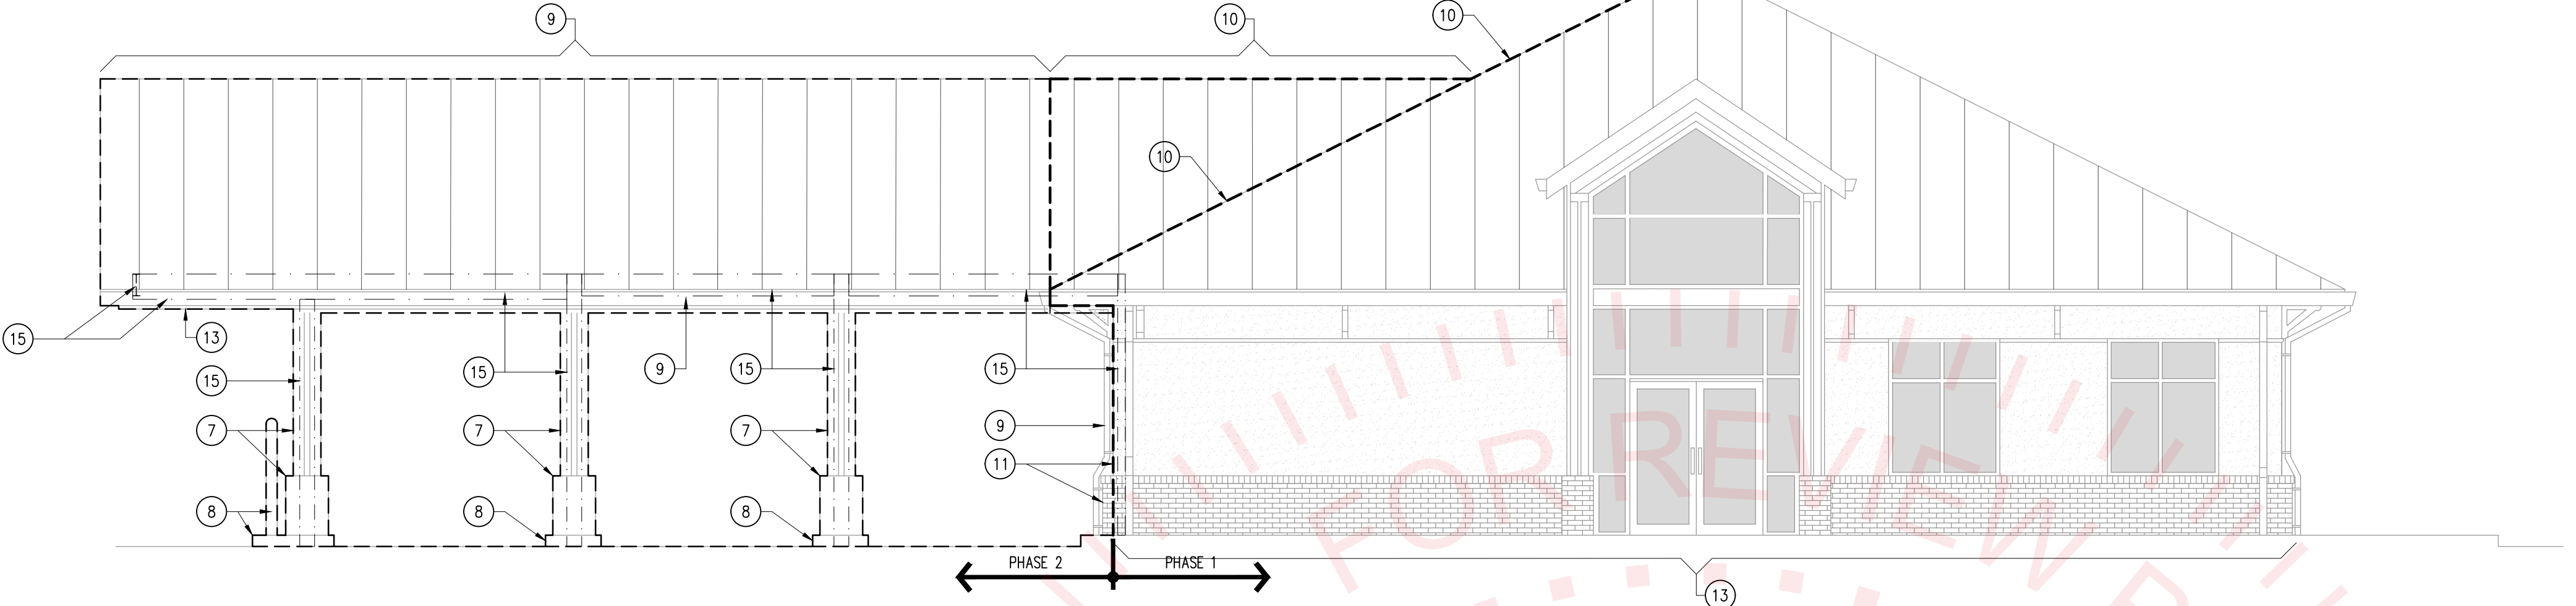


C1 | SOUTH ELEVATION

SCALE: 3/16" = 1'-0"

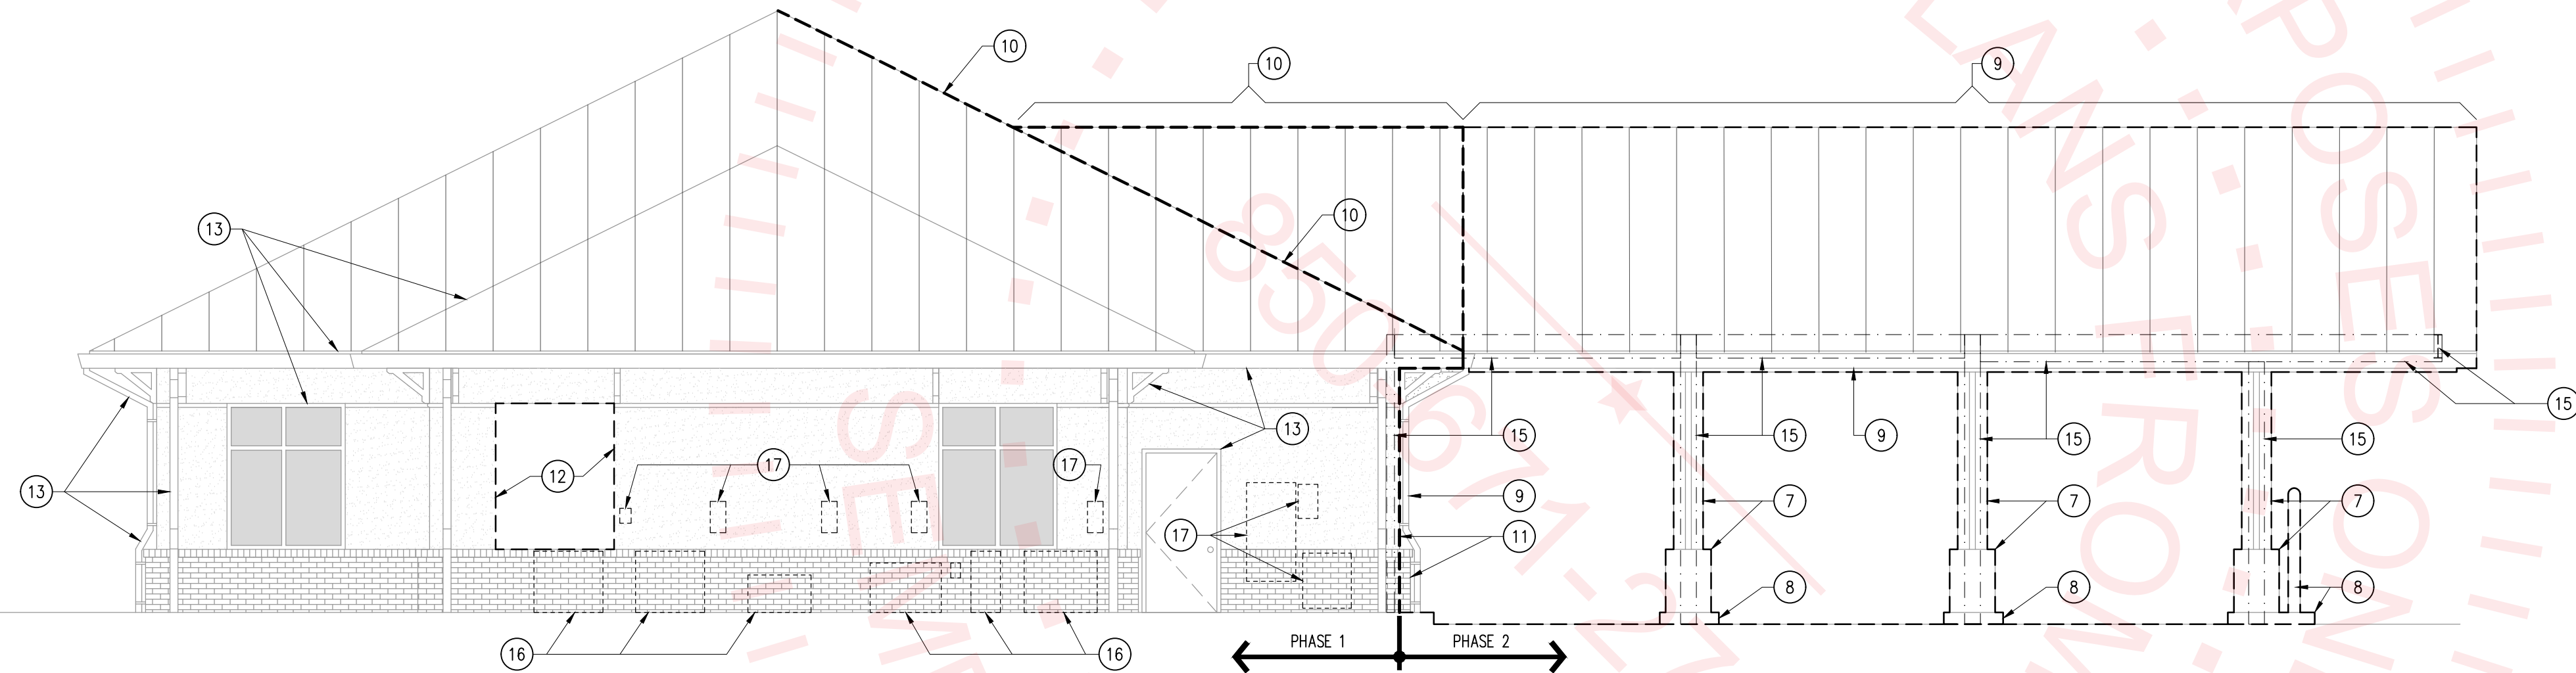

B1	NORTH ELEVATION
----	-----------------

SCALE: 3/16" = 1'-0"

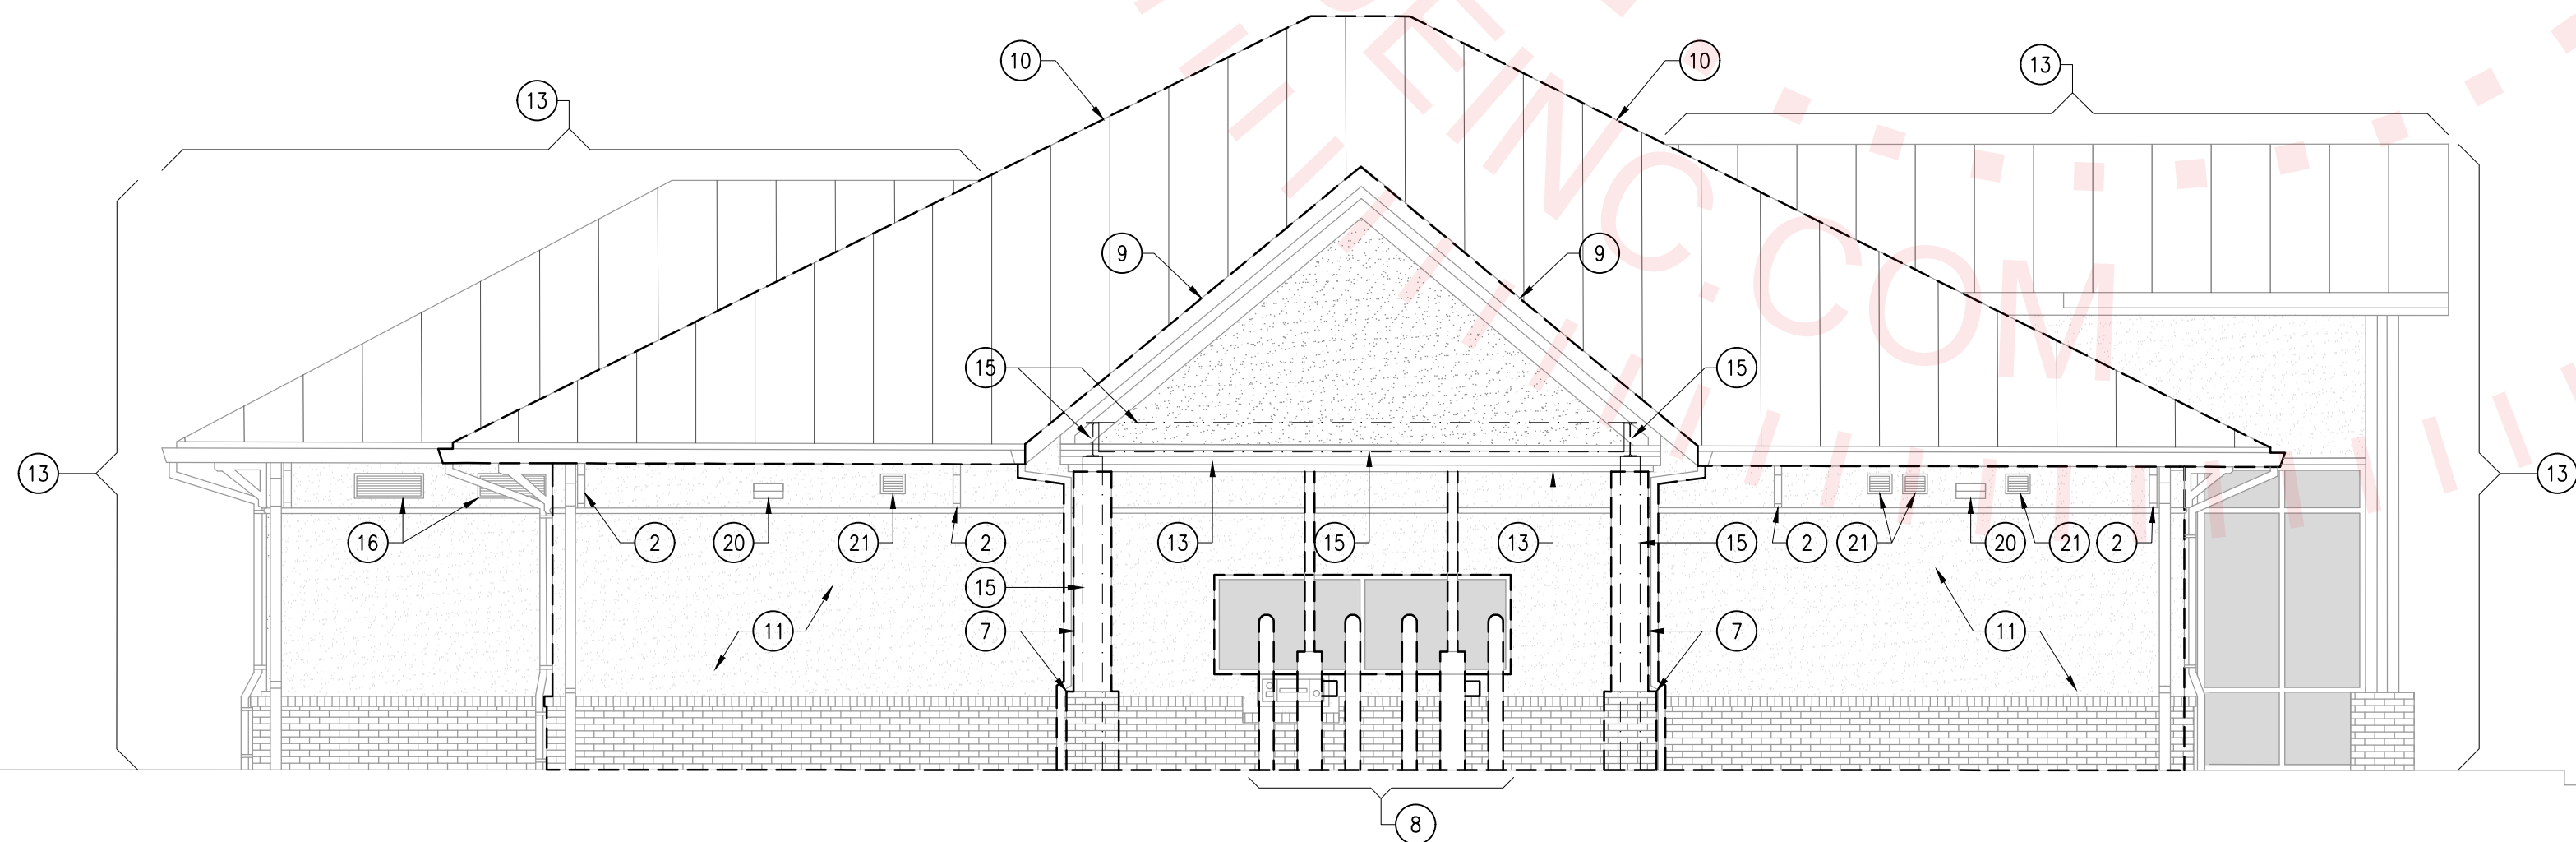

A1	WEST ELEVATION
----	----------------

SCALE: 3/16" = 1'-0"

DEMO KEYNOTES:

- (1) REMOVE EXISTING STUD WALL, DOOR, & WINDOW ASSEMBLY AS INDICATED.
- (2) EXISTING BRACKETS TO BE RELOCATED; REFER TO NEW CONSTRUCTION ELEVATIONS.
- (3) REMOVE EXISTING CEILING ASSEMBLY, INCLUDING BUT NOT LIMITED TO CEILING FINISHES, LIGHT FIXTURES, MECHANICAL GRILLES/DIFFUSERS; PREP TO ACCEPT NEW WORK.
- (4) REMOVE EXISTING DOOR & STORE FRONT ASSEMBLY; PATCH & REPAIR TO ACCEPT NEW WORK.
- (5) REMOVE EXISTING CABINETS & PLUMBING FIXTURES.
- (6) REMOVE EXISTING MILLWORK/CABINETS & ASSOCIATED EQUIPMENT.
- (7) REMOVE EXISTING COLUMN WRAP- CONTRACTOR TO PROTECT EXISTING COLUMN FROM HARM.
- (8) REMOVE EXISTING DRIVE-THRU ISLANDS, INCLUDING BUT NOT LIMITED TO CONCRETE, BOLLARDS, EQUIPMENT, CONDUITS, ETC.
- (9) REMOVE EXISTING DRIVE-THRU CANOPY, INCLUDING BUT NOT LIMITED TO CANOPY ROOF, TRUSSES, GUTTER, DOWNSPOUT, MISC. ELECTRICAL COMPONENTS, ETC. CONTRACTOR TO PROTECT STRUCTURAL COMPONENTS FROM DAMAGE DURING & AFTER DEMOLITION.
- (10) PHASE 2: REMOVE EXISTING ROOFING COMPONENTS DOWN TO TRUSSES; CONTRACTOR TO PROTECT EXISTING TRUSSES FROM DAMAGE DURING DEMOLITION & AFTER, PROVIDE WEATHER TIGHT PROTECTION UNTIL NEW ROOF CAN BE CONNECTED/DRIED IN.
- (11) REMOVE EXISTING EXTERIOR WALL FINISHES & BRICK WAINSCOT TO FACE OF STUD.
- (12) REMOVE EXISTING WALL FRAMING & FINISHES AS REQUIRE TO ACCEPT NEW WINDOW ASSEMBLY.
- (13) EXISTING TO REMAIN.
- (14) REMOVE EXISTING RAISED FLOOR ASSEMBLY.
- (15) STRUCTURAL STEEL TO REMAIN, UNLESS OTHERWISE NOTED- SEE STRUCTURAL DRAWINGS.
- (16) EXISTING HVAC EQUIPMENT- REFER TO MECHANICAL DRAWINGS
- (17) EXISTING ELECTRICAL EQUIPMENT- REFER TO ELECTRICAL DRAWINGS
- (18) REMOVE EXISTING SERVER ROOM FIRE PROTECTION EQUIPMENT AND PANEL.
- (19) REMOVE EXISTING CONCRETE CURB AS REQUIRED- REFER CIVIL DRAWINGS
- (20) REMOVE EXISTING WALL MOUNTED LIGHT FIXTURE- REFER TO ELECTRICAL DRAWINGS
- (21) REMOVE EXISTING WALL MOUNTED EXHAUST LOUVER- REFER TO MECHANICAL DRAWINGS FOR NEW LOCATIONS

DEMO NOTES:

1. CONTRACTOR TO COORDINATE REMOVE OF ELECTRICAL ITEMS W/ OWNER'S REPRESENTATIVE FOR POSSIBLE SALVAGE PRIOR TO DEMOLITION/DISPOSAL.
2. ITEMS DECLARED SALVAGEABLE/REUSABLE TO BE PROTECTED FROM HARM DURING DEMOLITION & STORED IN A SAFE/SECURE LOCATION.
3. SALVAGED/REUSED ITEMS TO BE CLEANED/PREPARED TO "LIKE NEW" CONDITION PRIOR TO INSTALLATION.
4. PLUMBING DEMOLITION TO INCLUDE, BUT NOT LIMITED TO REMOVAL OF PLUMBING FIXTURES, SUPPLY, WASTE, & VENT PIPING, ETC.
5. ELECTRICAL DEMOLITION TO INCLUDE, BUT NOT LIMITED TO REMOVAL OF ELECTRICAL CONDUIT, WIRING, FIXTURES, ETC.
6. CONTRACTOR TO COORDINATE THE DEMOLITION & REMOVAL OF FRAMING, WALLS, FLOOR, & CEILING FINISHES, DOORS, WINDOWS, & OTHER ELEMENTS.

A5	NOTES
----	-------

SCALE: NTS



ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite I Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.

RENOVATIONS & NEW CONSTRUCTION FOR PANCARE CHIPLEY


1440 MAIN ST, CHIPLEY, FL 32428



DEMOLITION ELEVATIONS

PROJECT NUMBER	23071
DATED	02/05/2023

AD-201

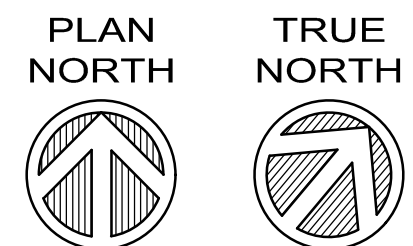



BID DOCUMENTS

PANCARE OF FLORIDA, INC.
RENOVATIONS &
NEW CONSTRUCTION
FOR PANCARE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428

[illegible]

SITE PLAN

PROJECT NUMBER	23071
DATED	02/05/2023

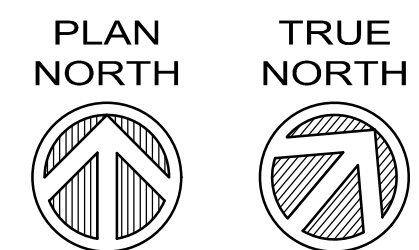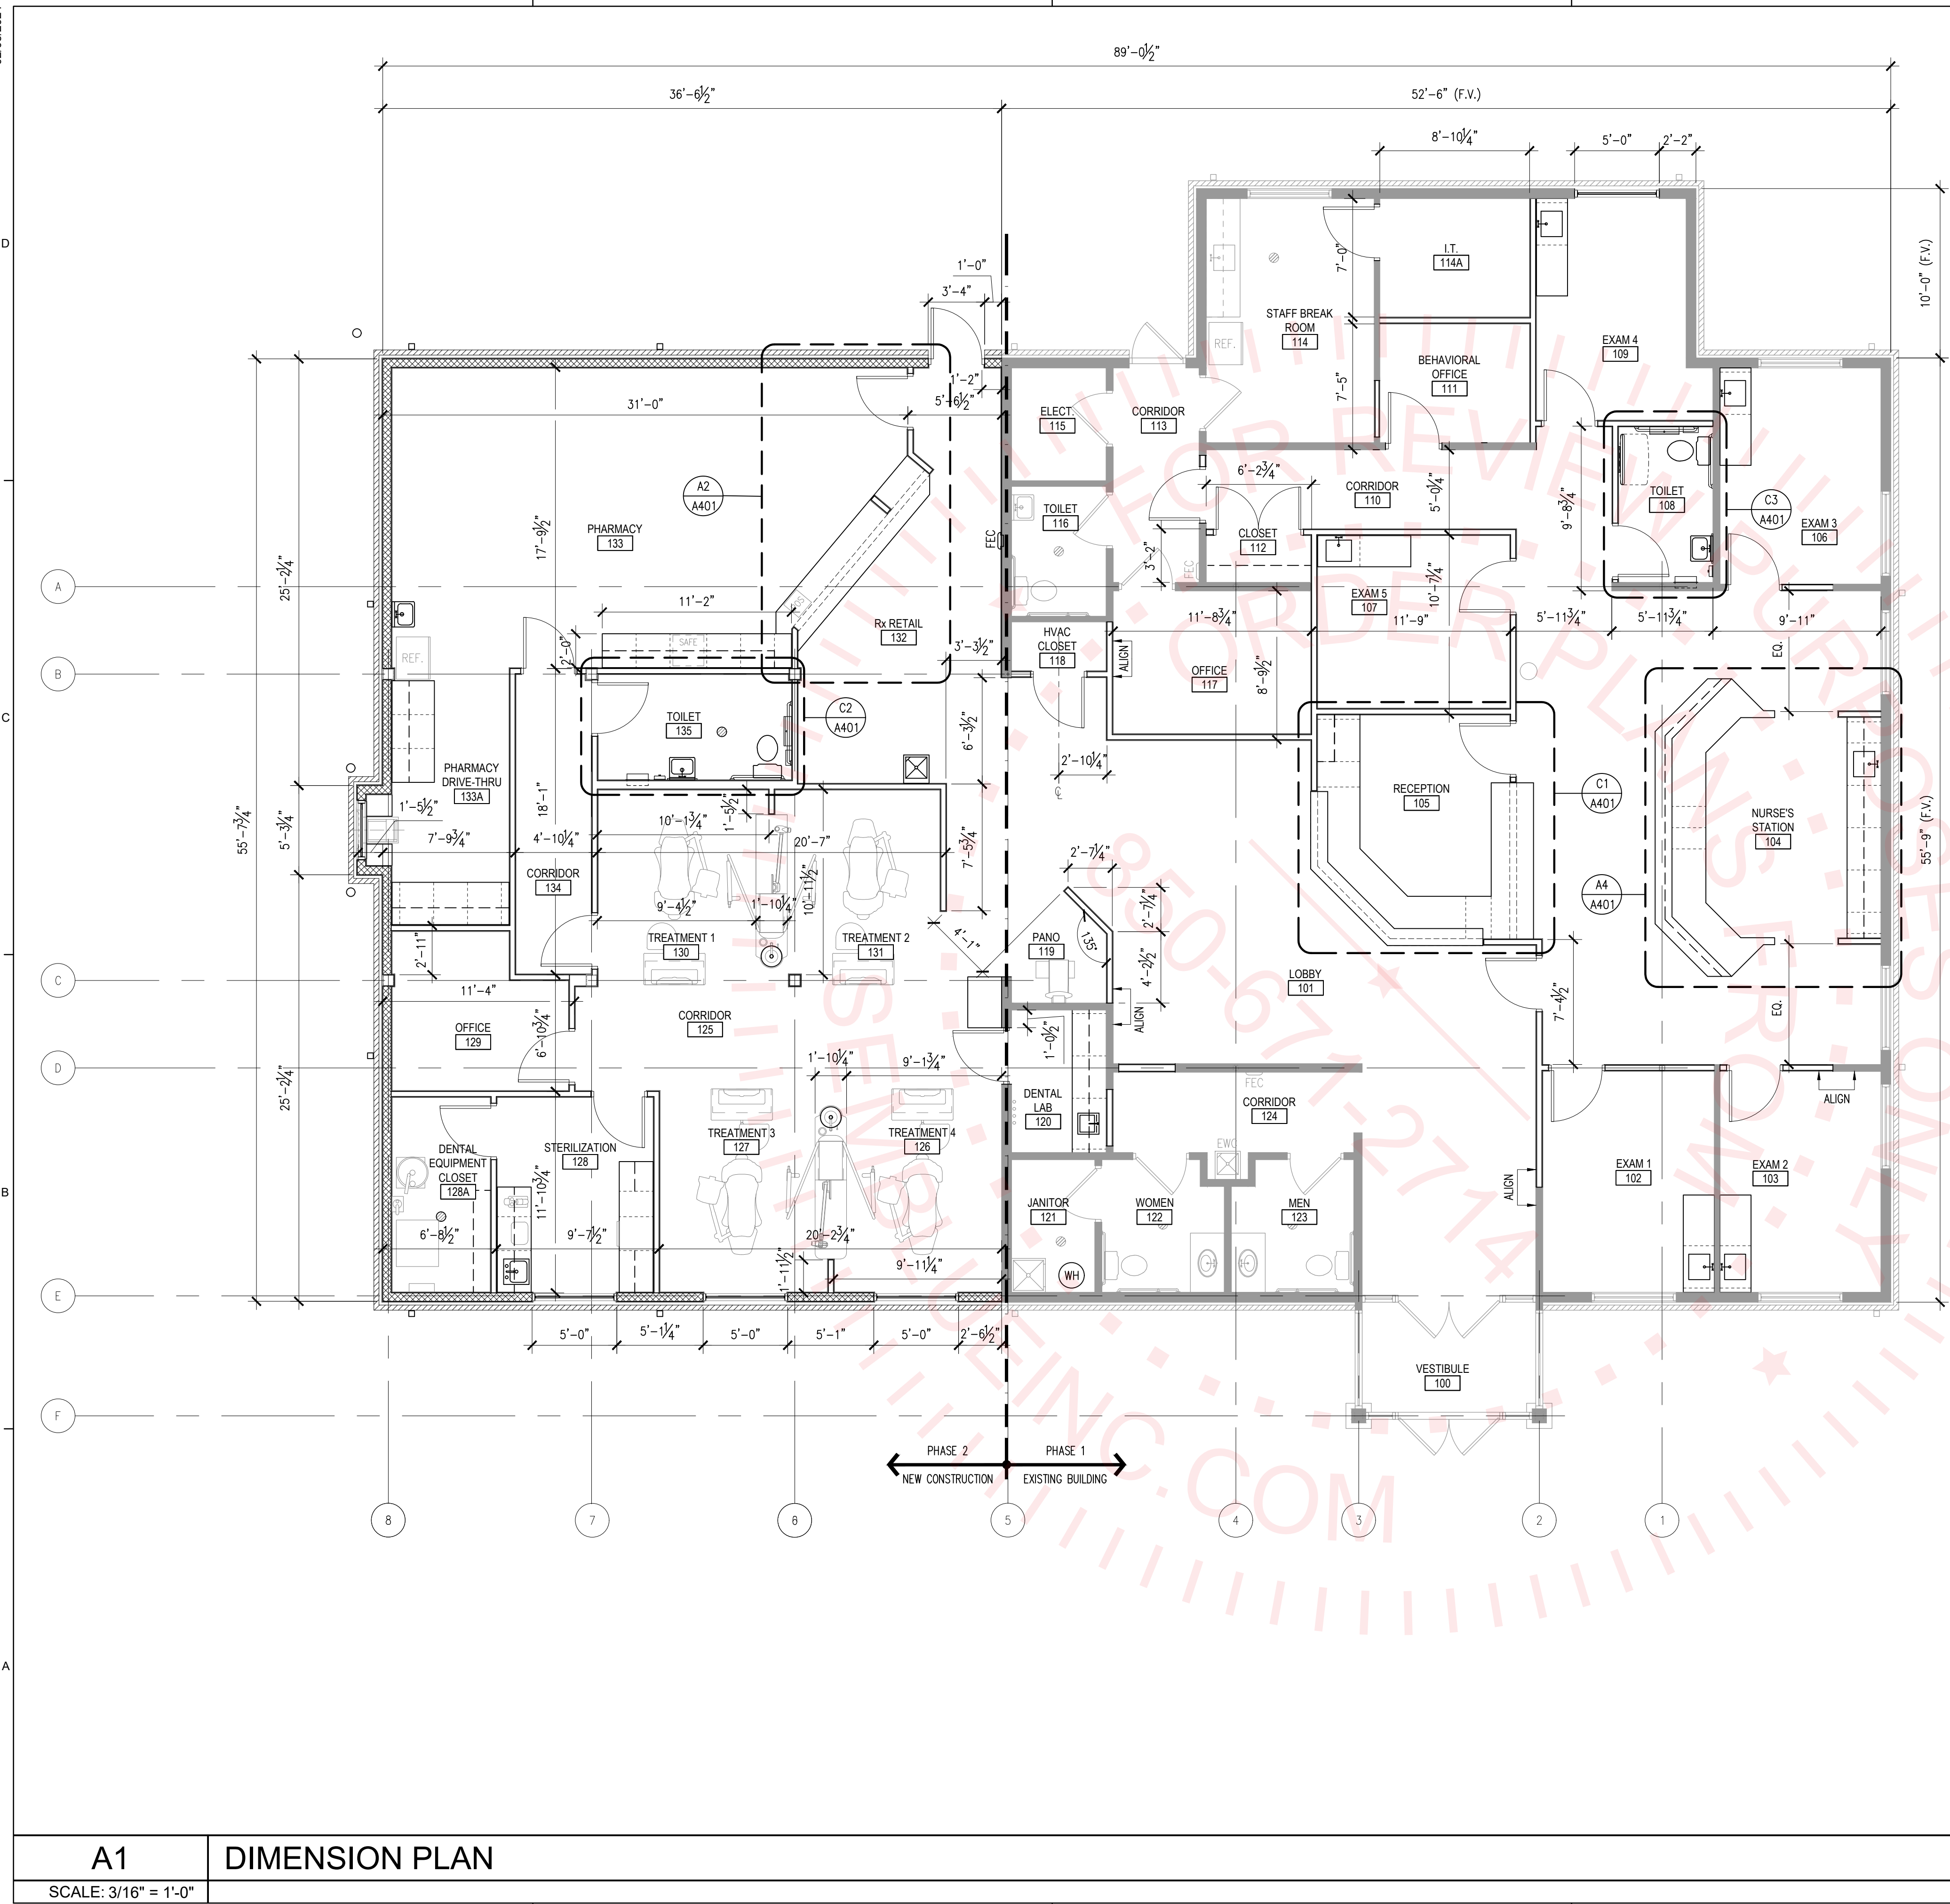

DIMENSION PLAN

[illegible]

DIMENSION PLAN

PROJECT NUMBER	23071
DATED	02/05/2023

A-101.1



ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite I Panama City, FL 32401
850.387.1671
www.DAGarchitects.com


BID DOCUMENTS

PANCARE OF FLORIDA, INC.

RENOVATIONS & NEW CONSTRUCTION FOR PANCARE CHIPLEY


1440 MAIN ST, CHIPLEY, FL 32428



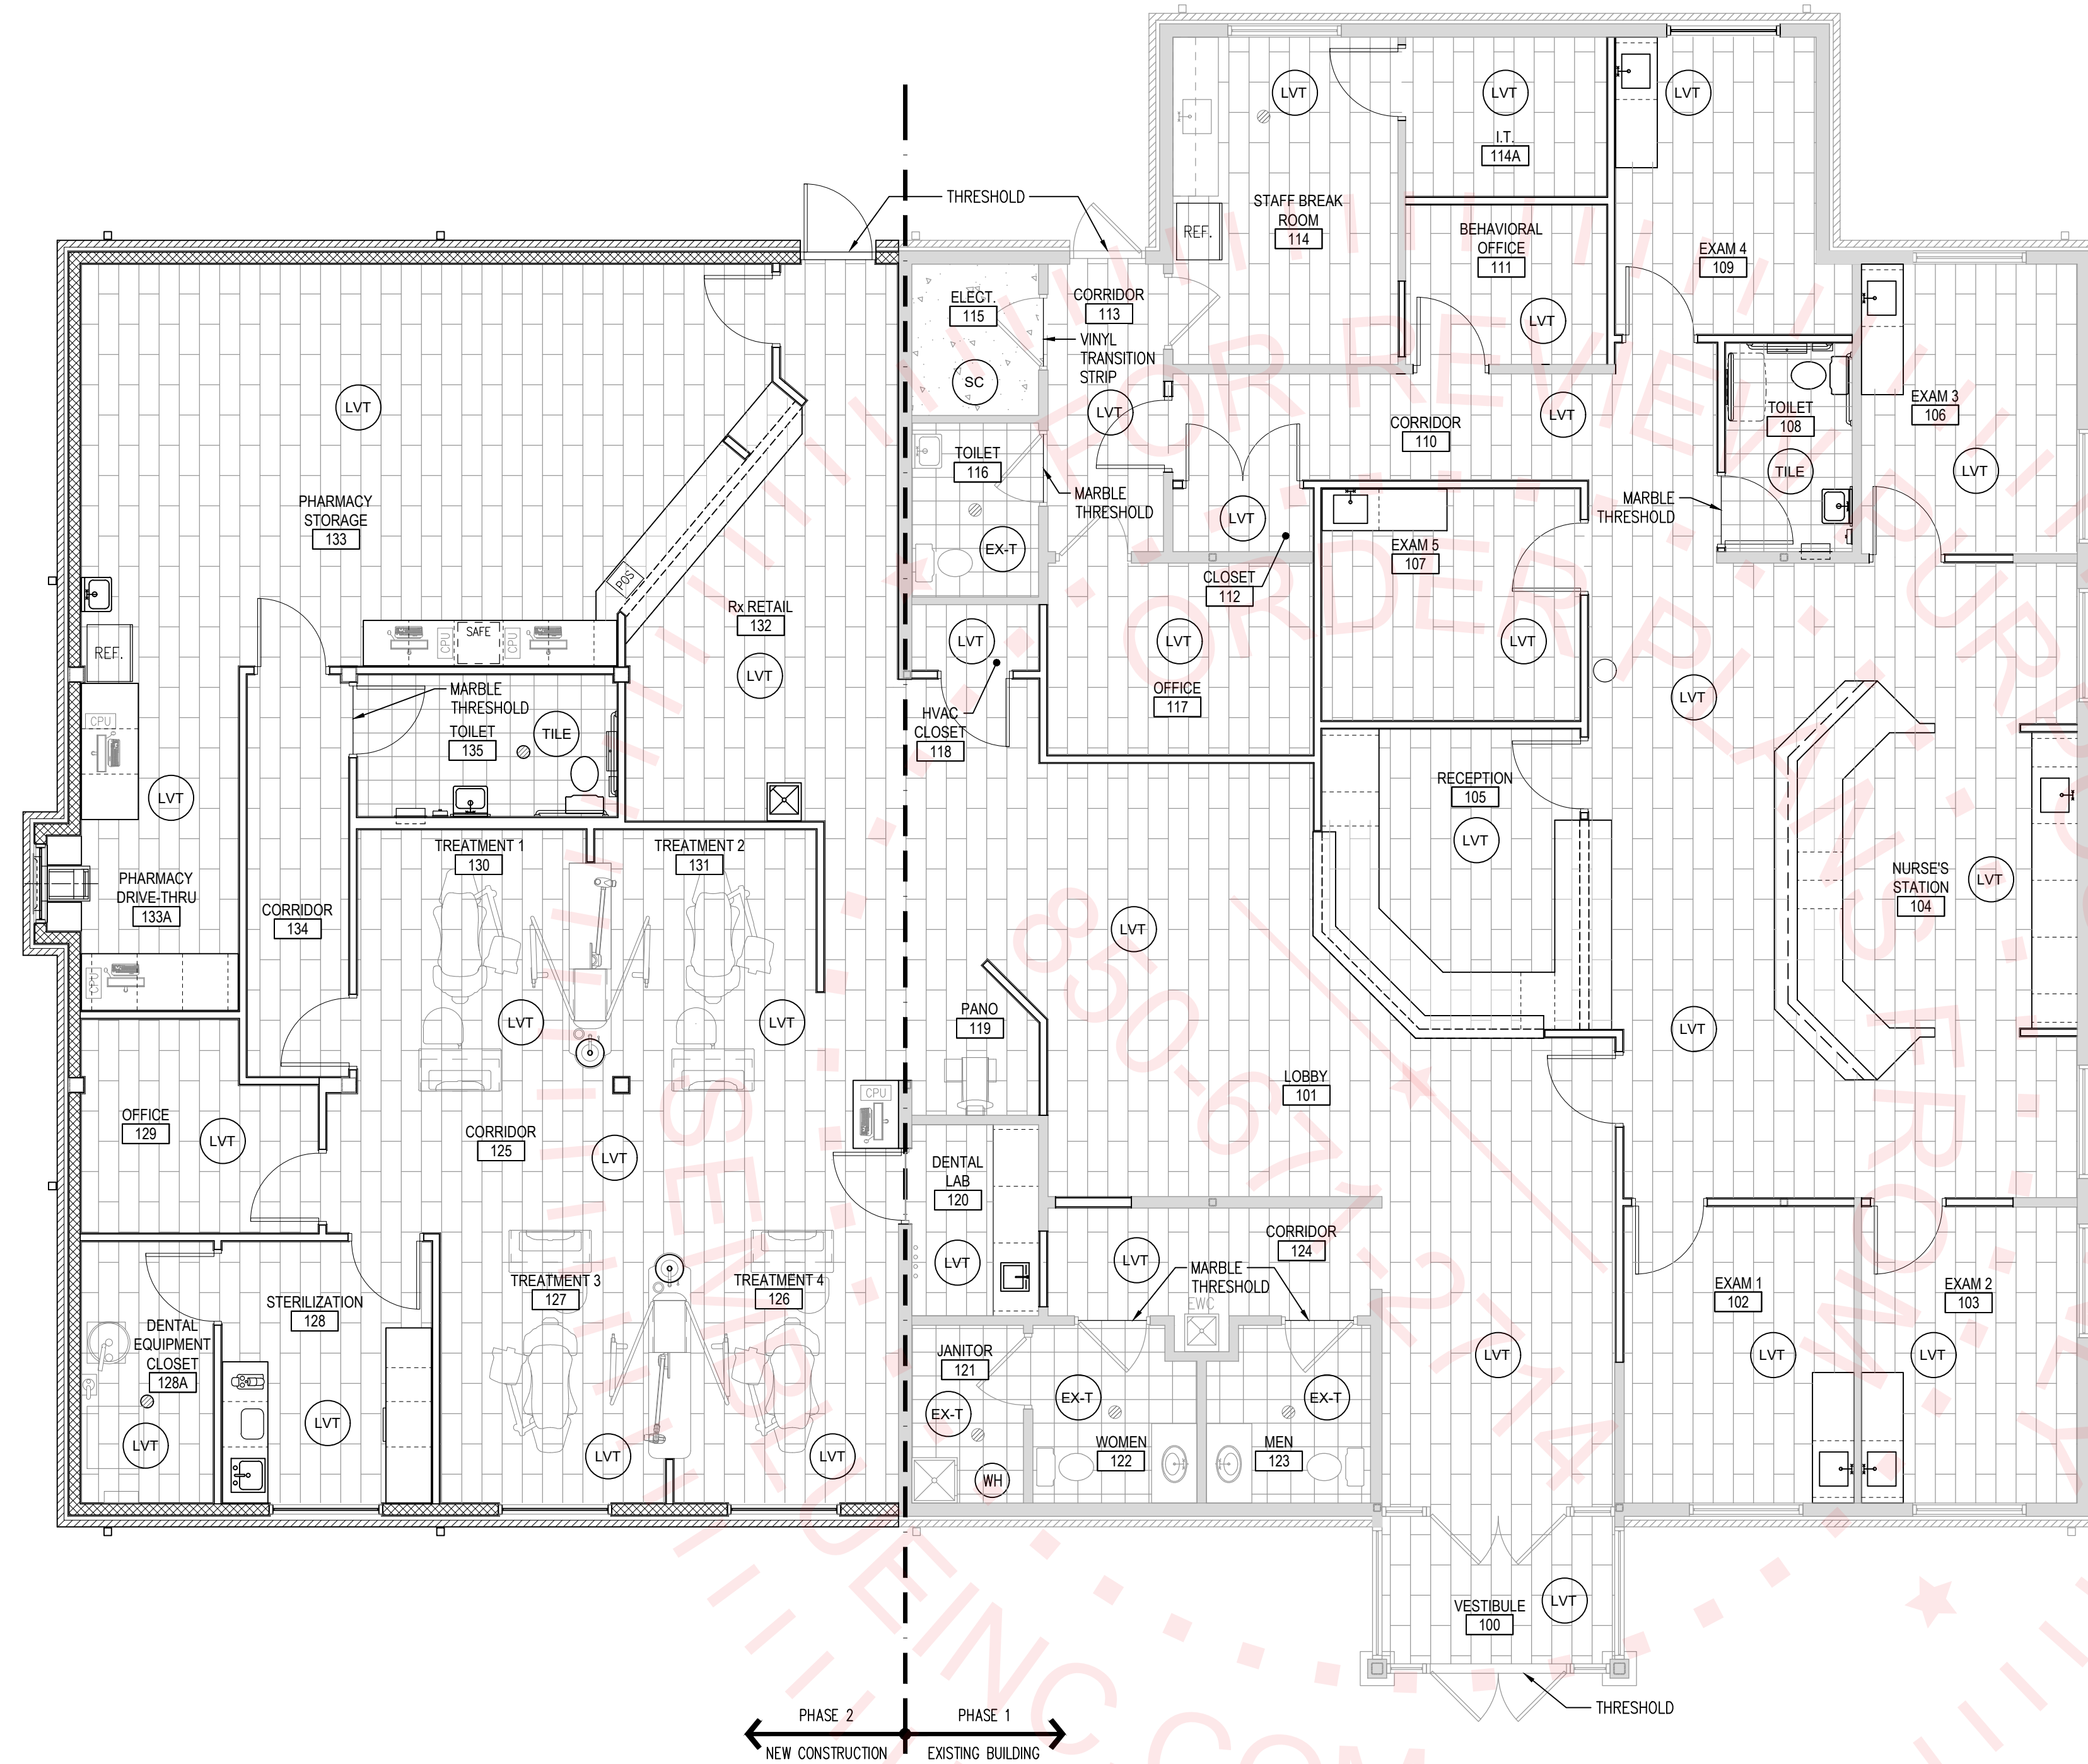


FLOORING


SEALED CONCRETE
(SC):




LUXURY VINYL TILE
(LVT):



TILE: (TILE)



TILE: (EX-T) EXISTING
TILE TO REMAIN



NOTES:

1. VERIFY FINAL FLOOR FINISHES WITH OWNER'S REPRESENTATIVE PRIOR TO CONSTRUCTION / PURCHASE OF MATERIALS
2. VERIFY FINAL FLOOR FINISH COLORS WITH OWNER'S REPRESENTATIVE PRIOR TO CONSTRUCTION / PURCHASE OF MATERIALS

C5

SCALE: NTS

LEGEND & NOTES



PANCARE OF FLORIDA, INC.

RENOVATIONS & NEW CONSTRUCTION FOR PANCARE CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428




REVISIONS:

[illegible]

FINISH PLAN

PROJECT NUMBER	23071
DATED	02/05/2023

A-101.2

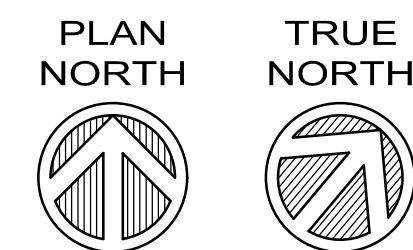

C5	LEGEND
SCALE: NTS	

1. SEE FINISH SCHEDULE FOR CEILING HEIGHTS.
2. REFER TO ELECTRICAL DOCUMENTS FOR SPECIFIC FIXTURE TYPES.
3. REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.

OVERHEAD COILING GRILLE:

BID DOCUMENTS


1440 MAIN ST, CHIPLEY, FL 32428

[illegible]REFLECTED
CEILING PLAN

PROJECT NUMBER	23071
DATED	02/05/2023

A-101.3

A5	NOTES
SCALE: NTS	

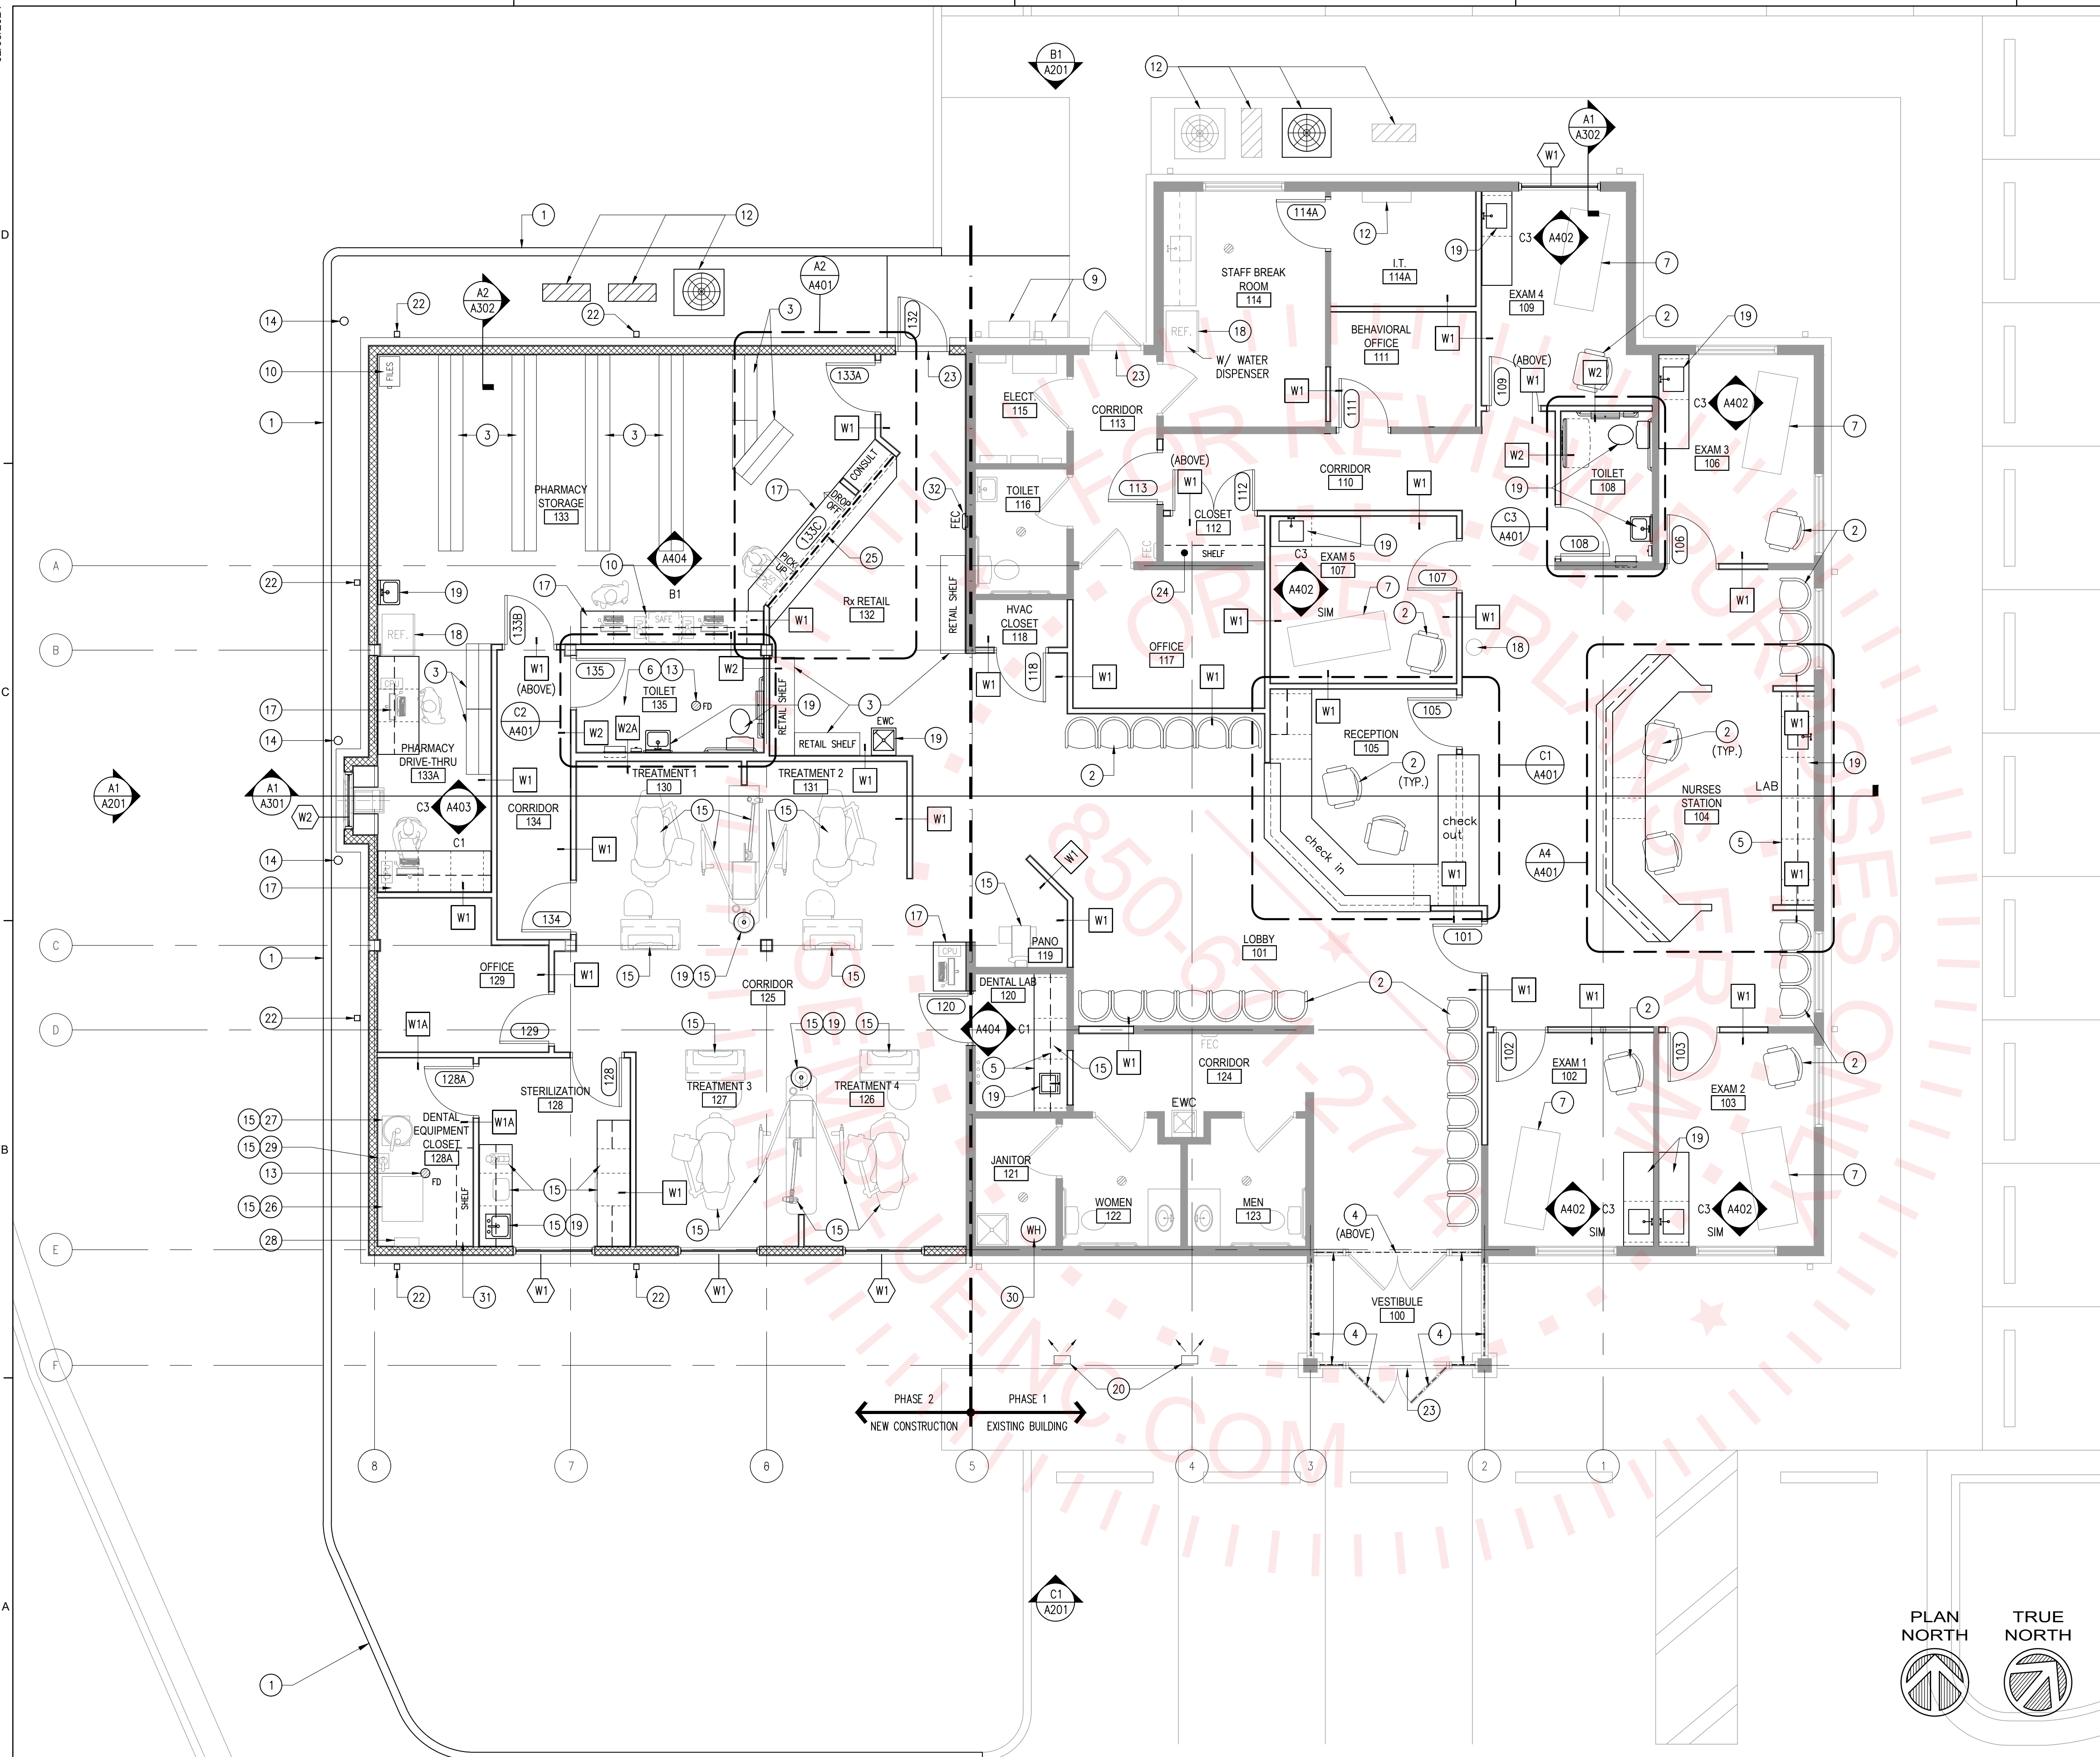

KEYNOTES:

- (1) RAISED 6" CONCRETE CURB.
- (2) OWNER FURNISHED / OWNER INSTALLED FURNITURE, SHOWN FOR REFERENCE ONLY.
- (3) OWNER FURNISHED / CONTRACTOR INSTALLED SHELVING, SHOWN FOR REFERENCE ONLY.
- (4) TINT ALL WINDOWS @ VESTIBULE #100
- (5) BASE AND UPPER CABINETS-- SEE SPECS.
- (6) FLOOR SLOPES TO FLOOR DRAIN, COORDINATE FLOORING THICKNESS WITH FLOOR DRAIN INSTALLATION, SEE DETAIL A3/A331.
- (7) OWNER PROVIDED / CONTRACTOR INSTALLED EXAM TABLE
- (8) ELECTRICAL EQUIPMENT, SEE ELECTRICAL DRAWINGS.
- (9) OWNER FURNISHED / CONTRACTOR INSTALLED OFFICE EQUIPMENT
- (10) OWNER FURNISHED / CONTRACTOR INSTALLED DENTAL CASEWORK
- (11) HVAC UNIT/ EQUIPMENT -- REFER TO MECHANICAL DRAWINGS.
- (12) FLOOR DRAIN-- REFER TO PLUMBING DRAWINGS.
- (13) STEEL PIPE BOLLARD -- REFER TO A3/A310 FOR INFORMATION AND DETAILS
- (14) VENDOR OUPRISED EQUIPMENT & MILLWORK. REFER TO VENDOR DRAWINGS ADDITIONAL INFORMATION. VENDOR: PATTERSON DENTAL, 1031 MENDOTA HEIGHTS RD., MENDOTA HEIGHTS, MN P.O.C. GABRIEL ANAYA, PH. 850-860-6317
- (15) STANDING LEVEL WORK SURFACE, SEE ELEVATIONS.
- (16) APPLIANCE-- PROVIDED BY OWNER, INSTALLED BY CONTRACTOR; REFER TO MANUF. SPECS FOR INSTALLATION REQUIREMENTS PRIOR TO BEGINNING WORK.
- (17) PLUMBING FIXTURES -- REFER TO PLUMBING DRAWINGS.
- (18) EXTERIOR SIGNAGE LIGHTING-- REFER TO ELECTRICAL DRAWINGS
- (19) PRE-FINISHED ALUMINUM DOWNSPOUT
- (20) FLOORING TRANSITION
- (21) 12" DEEP CLOSET SHELF @ 5"-6" AFF
- (22) OVERHEAD COILING SECURITY GRILLE.
BASIS OF DESIGN: OVERHEAD DOR CO., MODEL #670, MANUAL OPERATION, FINL FINISH, LENGTH & HEIGHT PER PLANS.
- (23) DENTAL AIR COMPRESSOR
- (24) DENTAL VACUUM PUMP
- (25) DENTAL WATER FILTER MANIFOLD
- (26) DENTAL AMALGAM SEPARATOR
- (27) WATER HEATER-- REFER TO PLUMBING DRAWINGS
- (28) 12" DEEP SHELVING
- (29) RECESSED FIRE EXTINGUISHER CABINET

WALL / PARTITION NOTES

1. ALL WALLS ARE TO BE WALL TYPE W-1, UNLESS NOTED OTHERWISE (U.N.O.) AND ARE UNTAGGED WALLS CONSTRUCTED DIFFERENTLY ARE TAGGED (X).
2. SEAL WALL JOINTS AND AT THE ROOF DECK TO ENSURE ACOUSTICAL INTEGRITY (ALL WALLS) AND FIRE RATING (WHERE REQUIRED).
3. BRACE ALL WALLS THAT TERMINATE AT 6" ABOVE CEILINGS.
4. STENCIL ABOVE CEILING ON BOTH SIDES OF ALL FIRE RATED WALLS 3" HIGH LETTERING TO READ "FIRE BARRIER - PROTECT ALL OPENINGS".
5. ALL ROOMS WITHOUT CEILING HAVE FINISHED, PAINTED GYPSUM BOARD FROM TOP OF SLAB TO BOTTOM OF DECK.
6. ALL DOORS ARE TO BE 6" OFF OF PERPENDICULAR WALL U.N.O.

GENERAL NOTES

1. SEE SITE, CIVIL, ELEC, AND MECH FOR ADDITIONAL WORK.
2. PROVIDE 1/2" PLYWOOD BACKING AT ALL WALL MOUNTED UPPER CABINETS, WALL MOUNTED ACCESSORIES, EXTERIOR BUILDING SIGNAGE, AND TV'S.



ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite I Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.

RENOVATIONS & NEW CONSTRUCTION FOR PANCARE CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:

[illegible]

FLOOR PLAN

PROJECT NUMBER	23071
DATED	02/05/2023

A-101


A1	FLOOR PLAN
----	------------

SCALE: 3/16" = 1'-0"

A5	NOTES
----	-------

SCALE: NTS

A 101

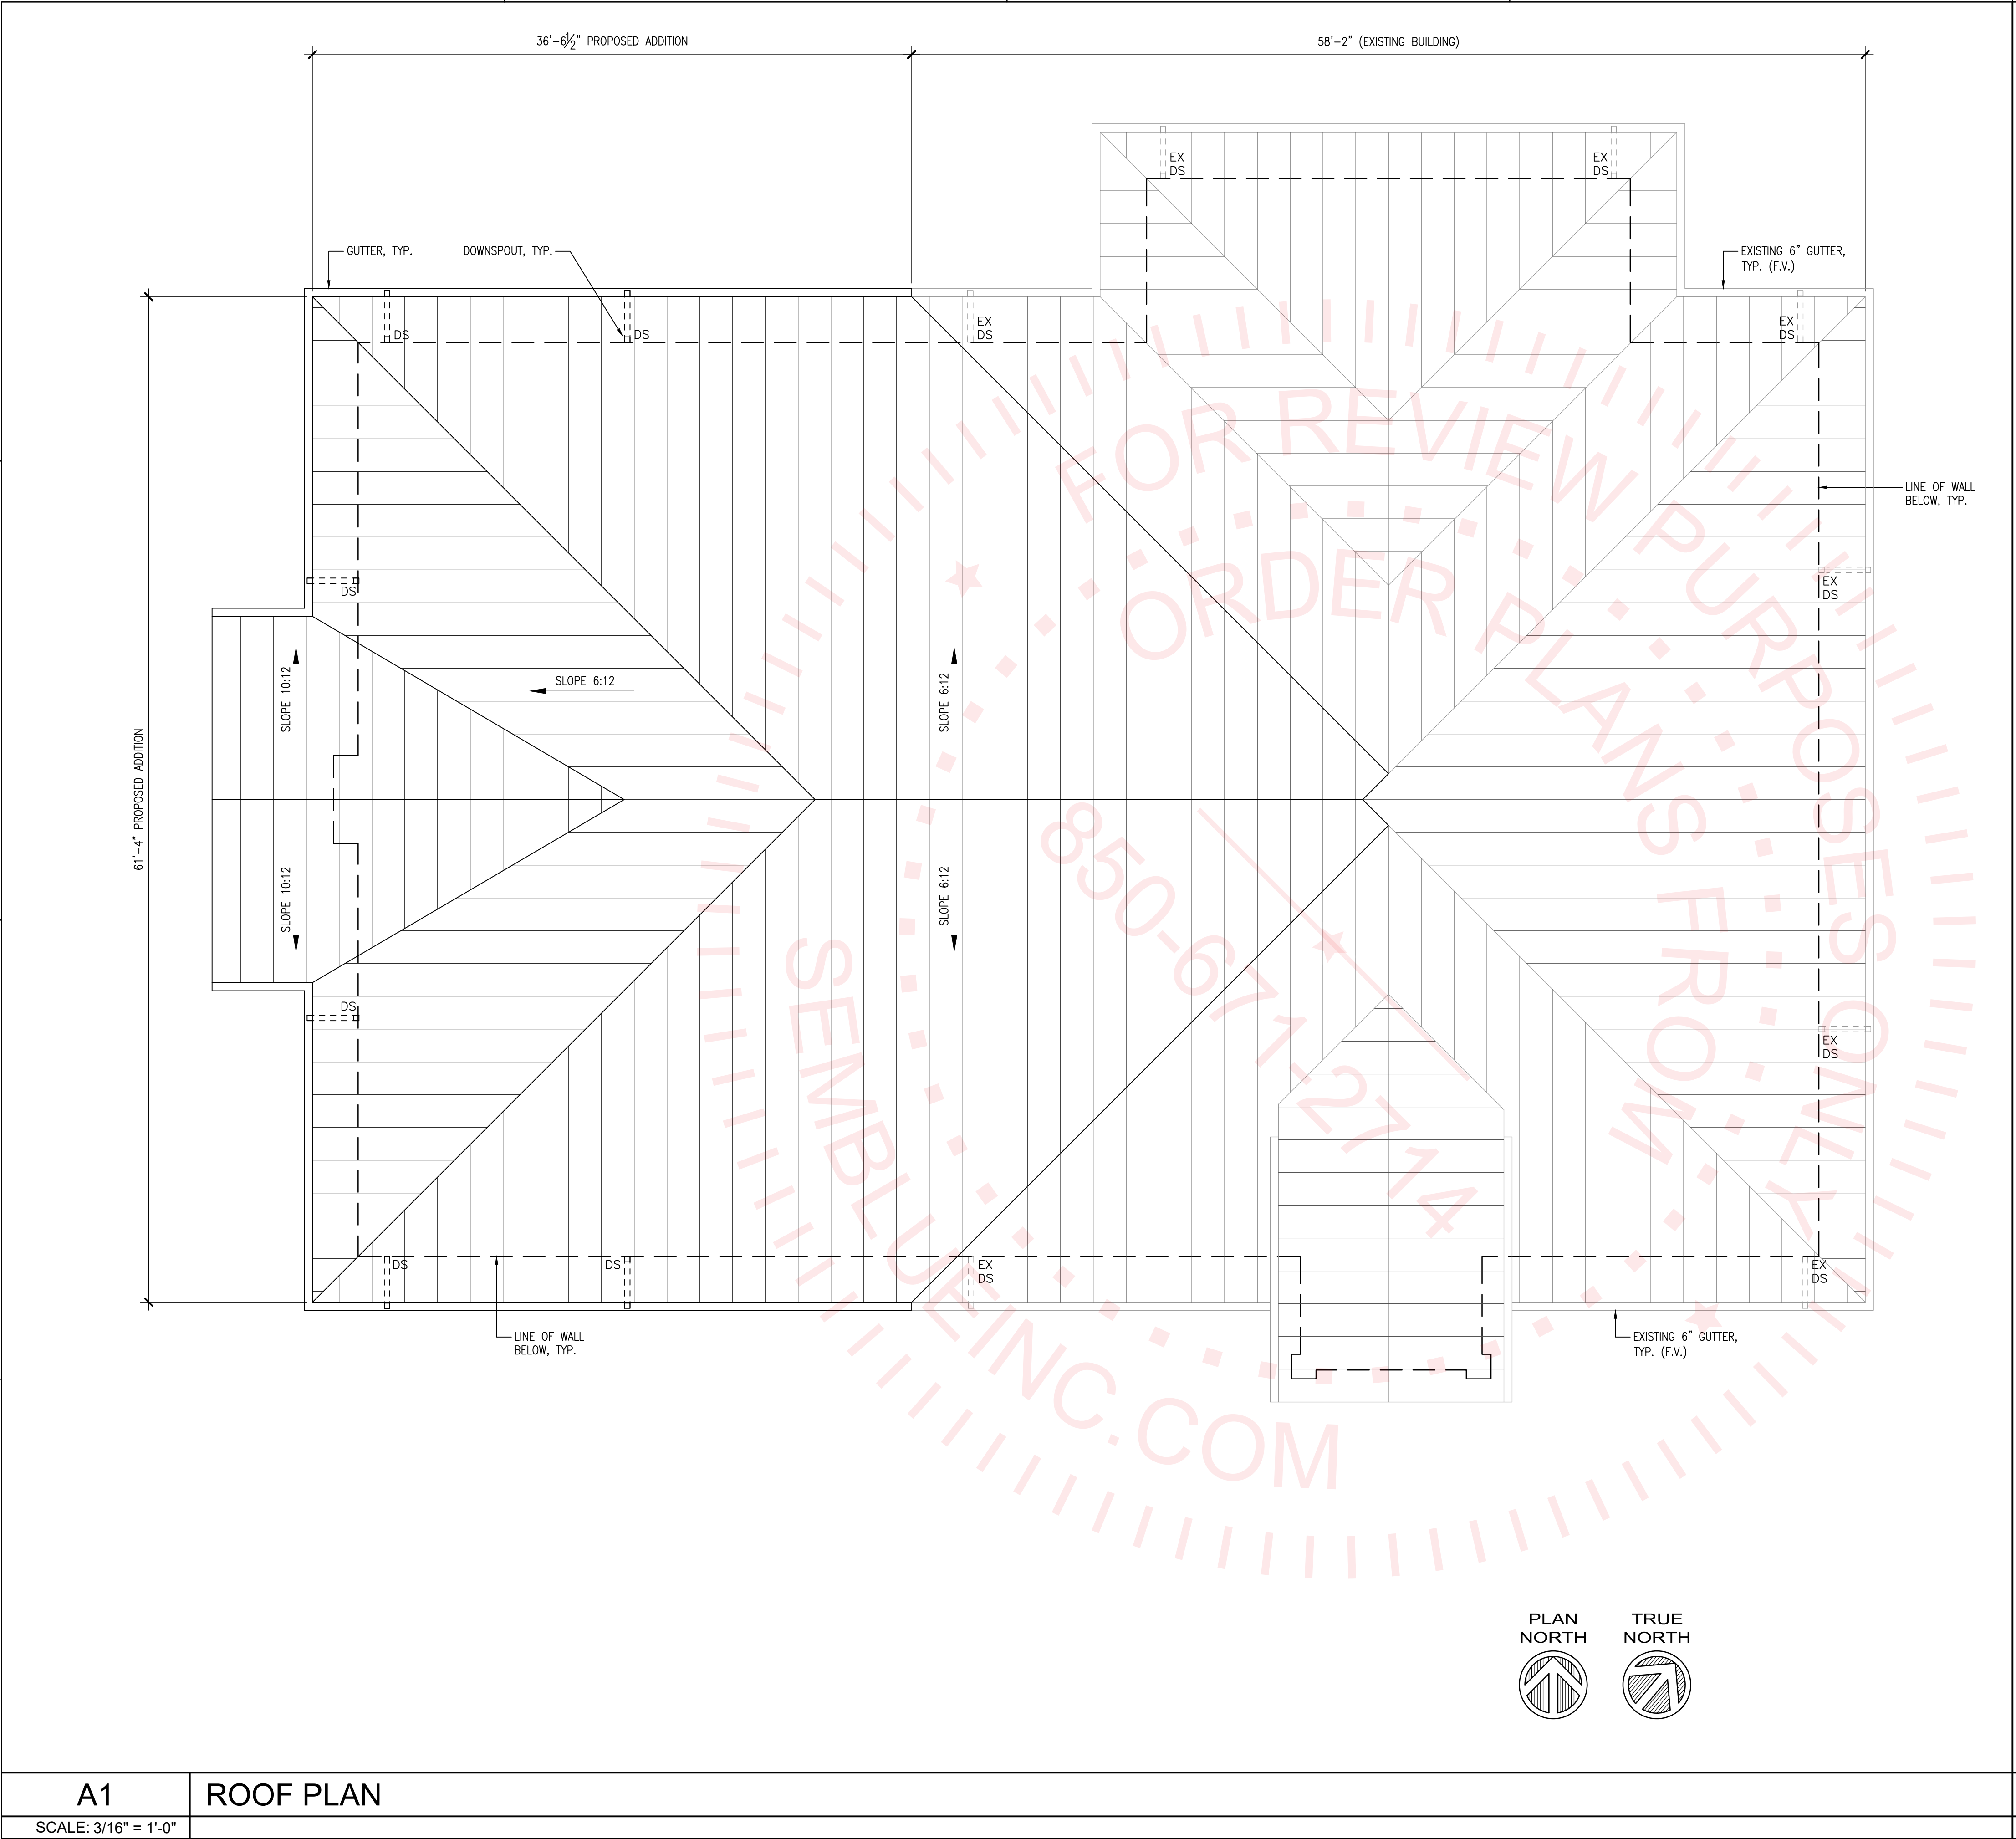

GENERAL NOTES

- 1. ROOFING PANELS AND ACCESSORIES BY BY METAL BUILDING MANUFACTURER.
- 2. PROVIDE CRICKETS AT VENTS, AND MANUFACTURER'S STANDARD FLASHING AND TRIM AS REQUIRED FOR ROOF PENETRATIONS, FANS, ETC. SEE MEP SHEETS FOR LOCATIONS.
- 3. PROVIDE ROOF INSULATION ASSEMBLY R-VALUE: R-29 MIN. (APPROX. 5")
- 4. GUTTER SIZE TO MATCH EXISTING.
- 5. DOWNSPOUT SIZE TO MATCH EXISTING, 3"x4" MINIMUM.

BASIS OF DESIGN

STANDING SEAM METAL ROOF:
MANUFACTURER – MBO
COLOR & STYLE – MATCH EXISTING



DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.
**RENOVATIONS &
NEW CONSTRUCTION**
FOR PANCARE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428




REVISIONS:		
No.	Description	Date


ROOF PLAN

PROJECT NUMBER	23071
DATED	02/05/2023


A1	ROOF PLAN	A5	NOTES
SCALE: 3/16" = 1'-0"		SCALE: NTS	

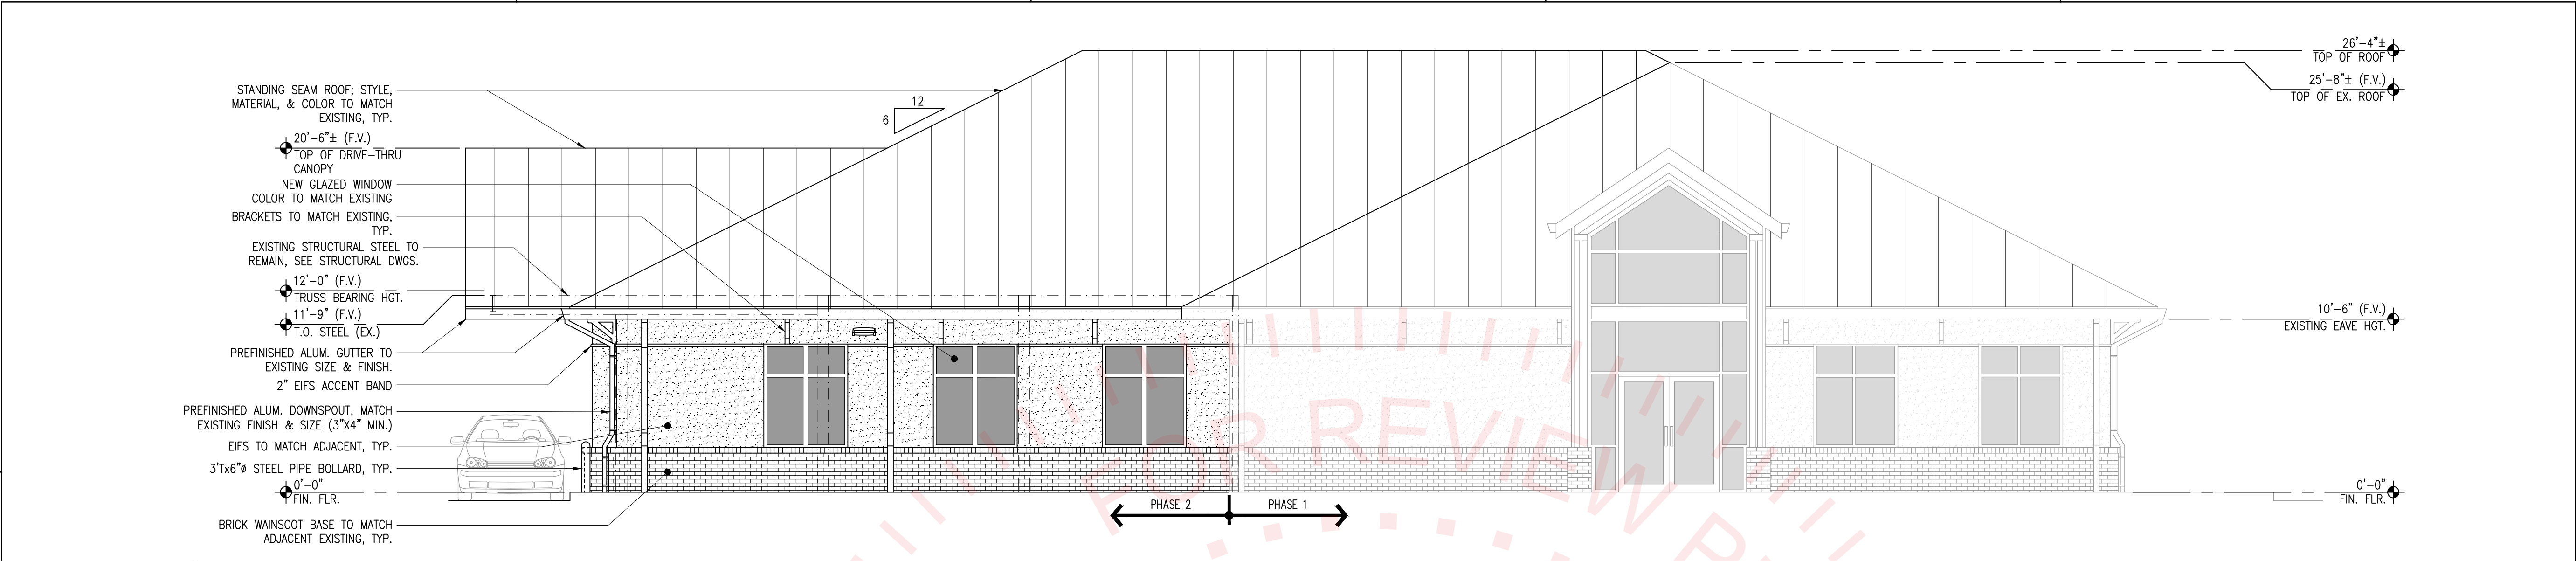

C1 SOUTH ELEVATION
SCALE: 3/16" = 1'-0"

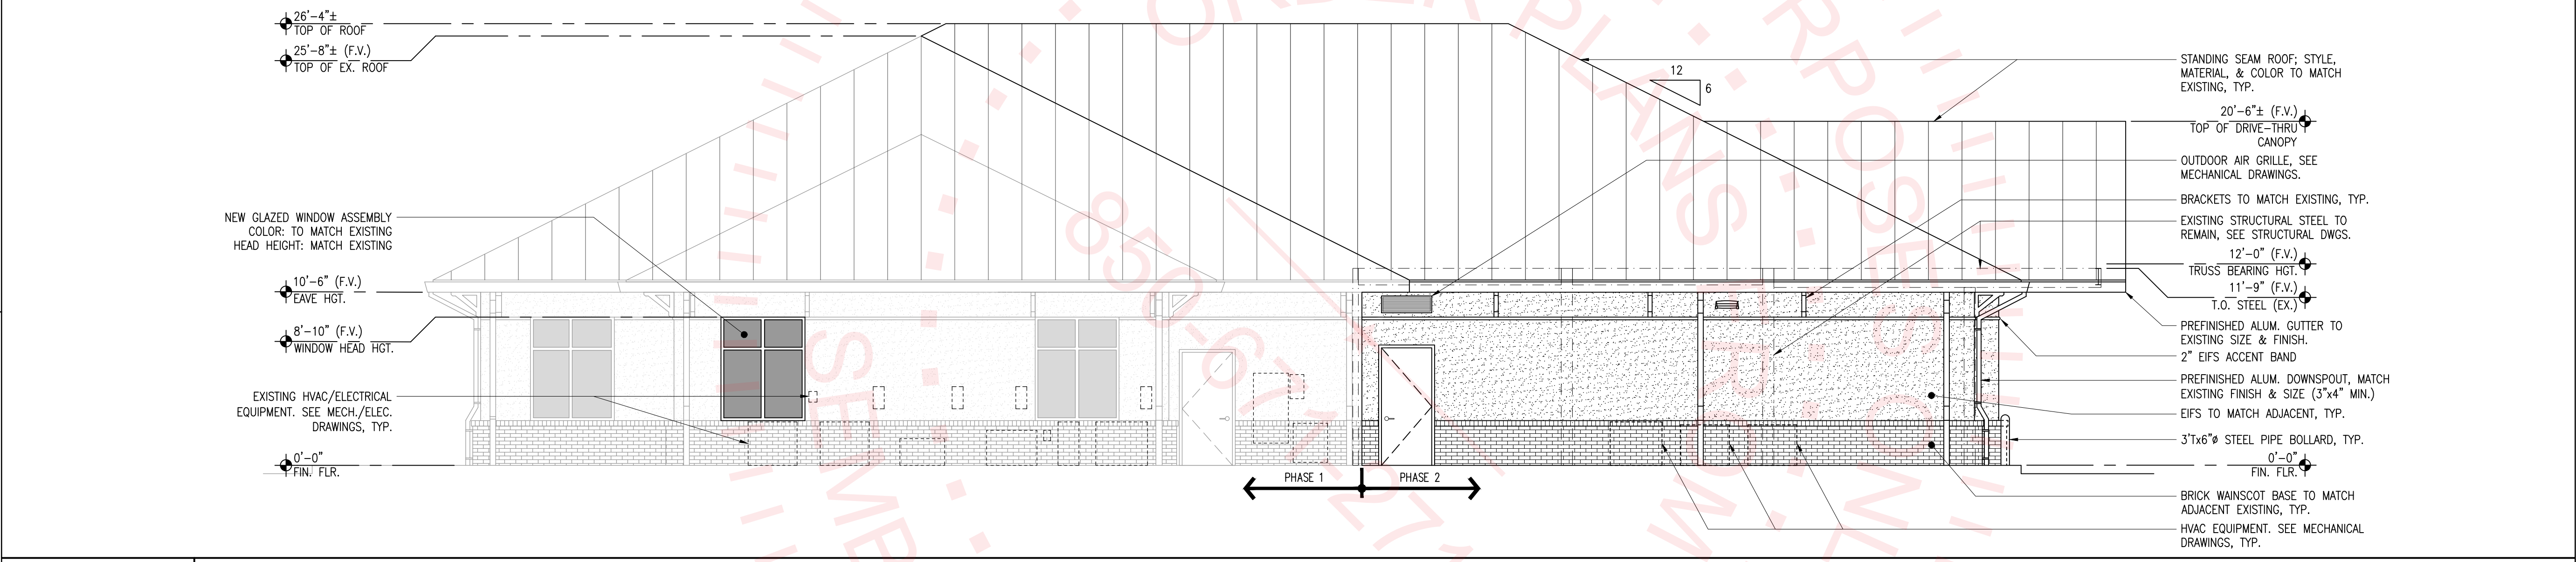

B1 NORTH ELEVATION
SCALE: 3/16" = 1'-0"

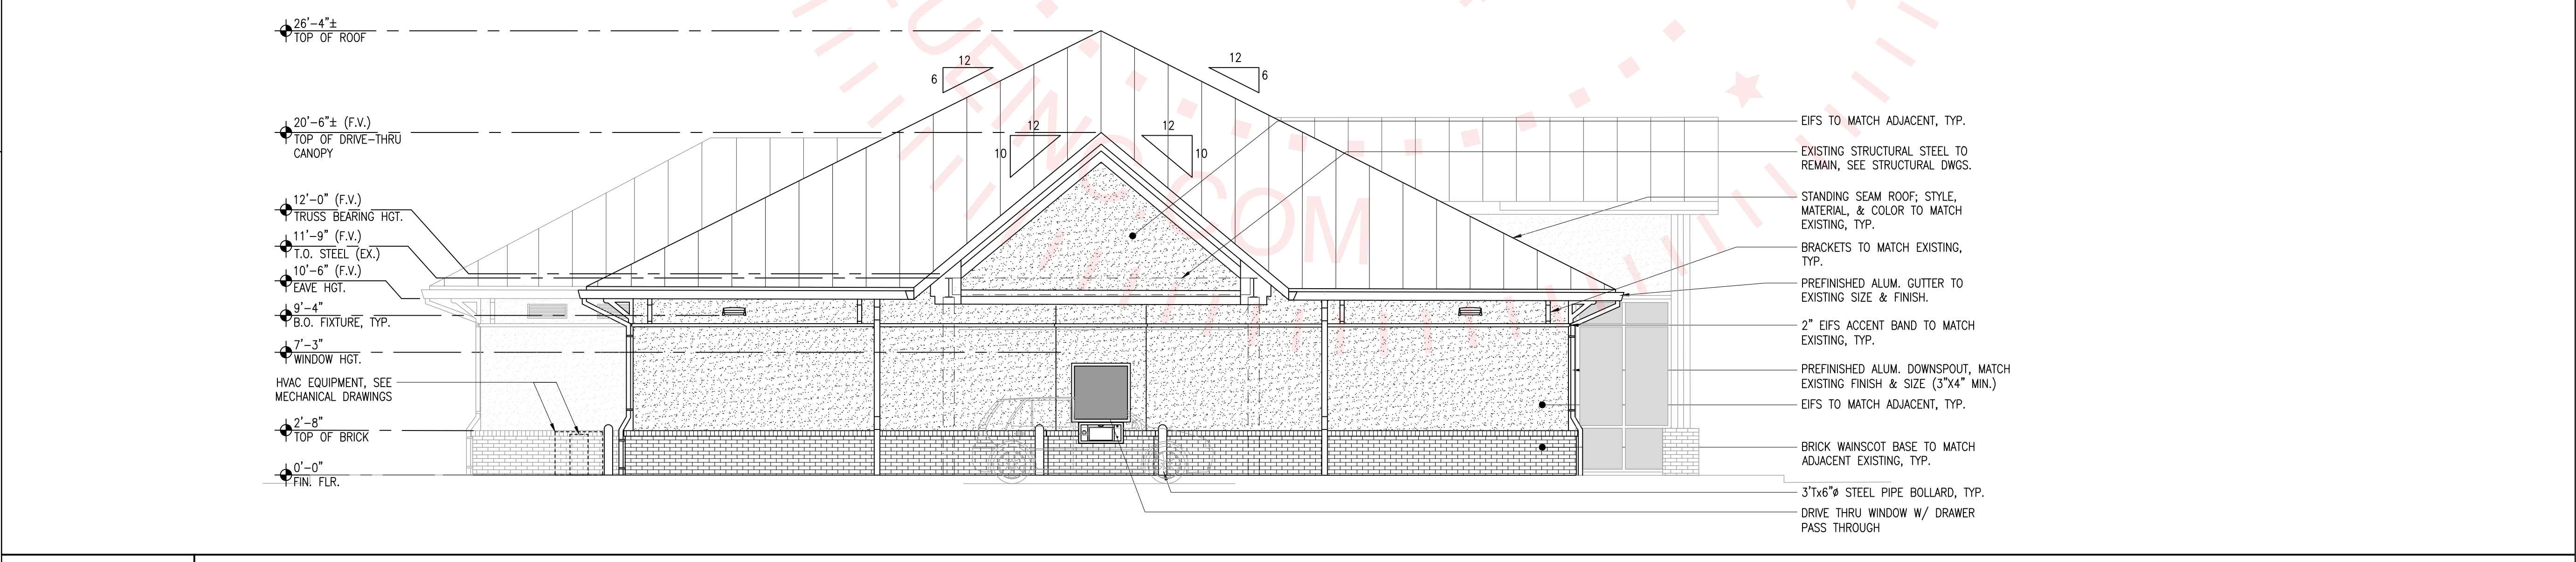

A1 WEST ELEVATION
SCALE: 3/16" = 1'-0"



ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS


PANCARE OF FLORIDA, INC.
**RENOVATIONS &
NEW CONSTRUCTION**
FOR PANCARE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:		
No.	Description	Date

ELEVATIONS

PROJECT NUMBER	23071
DATED	02/05/2023

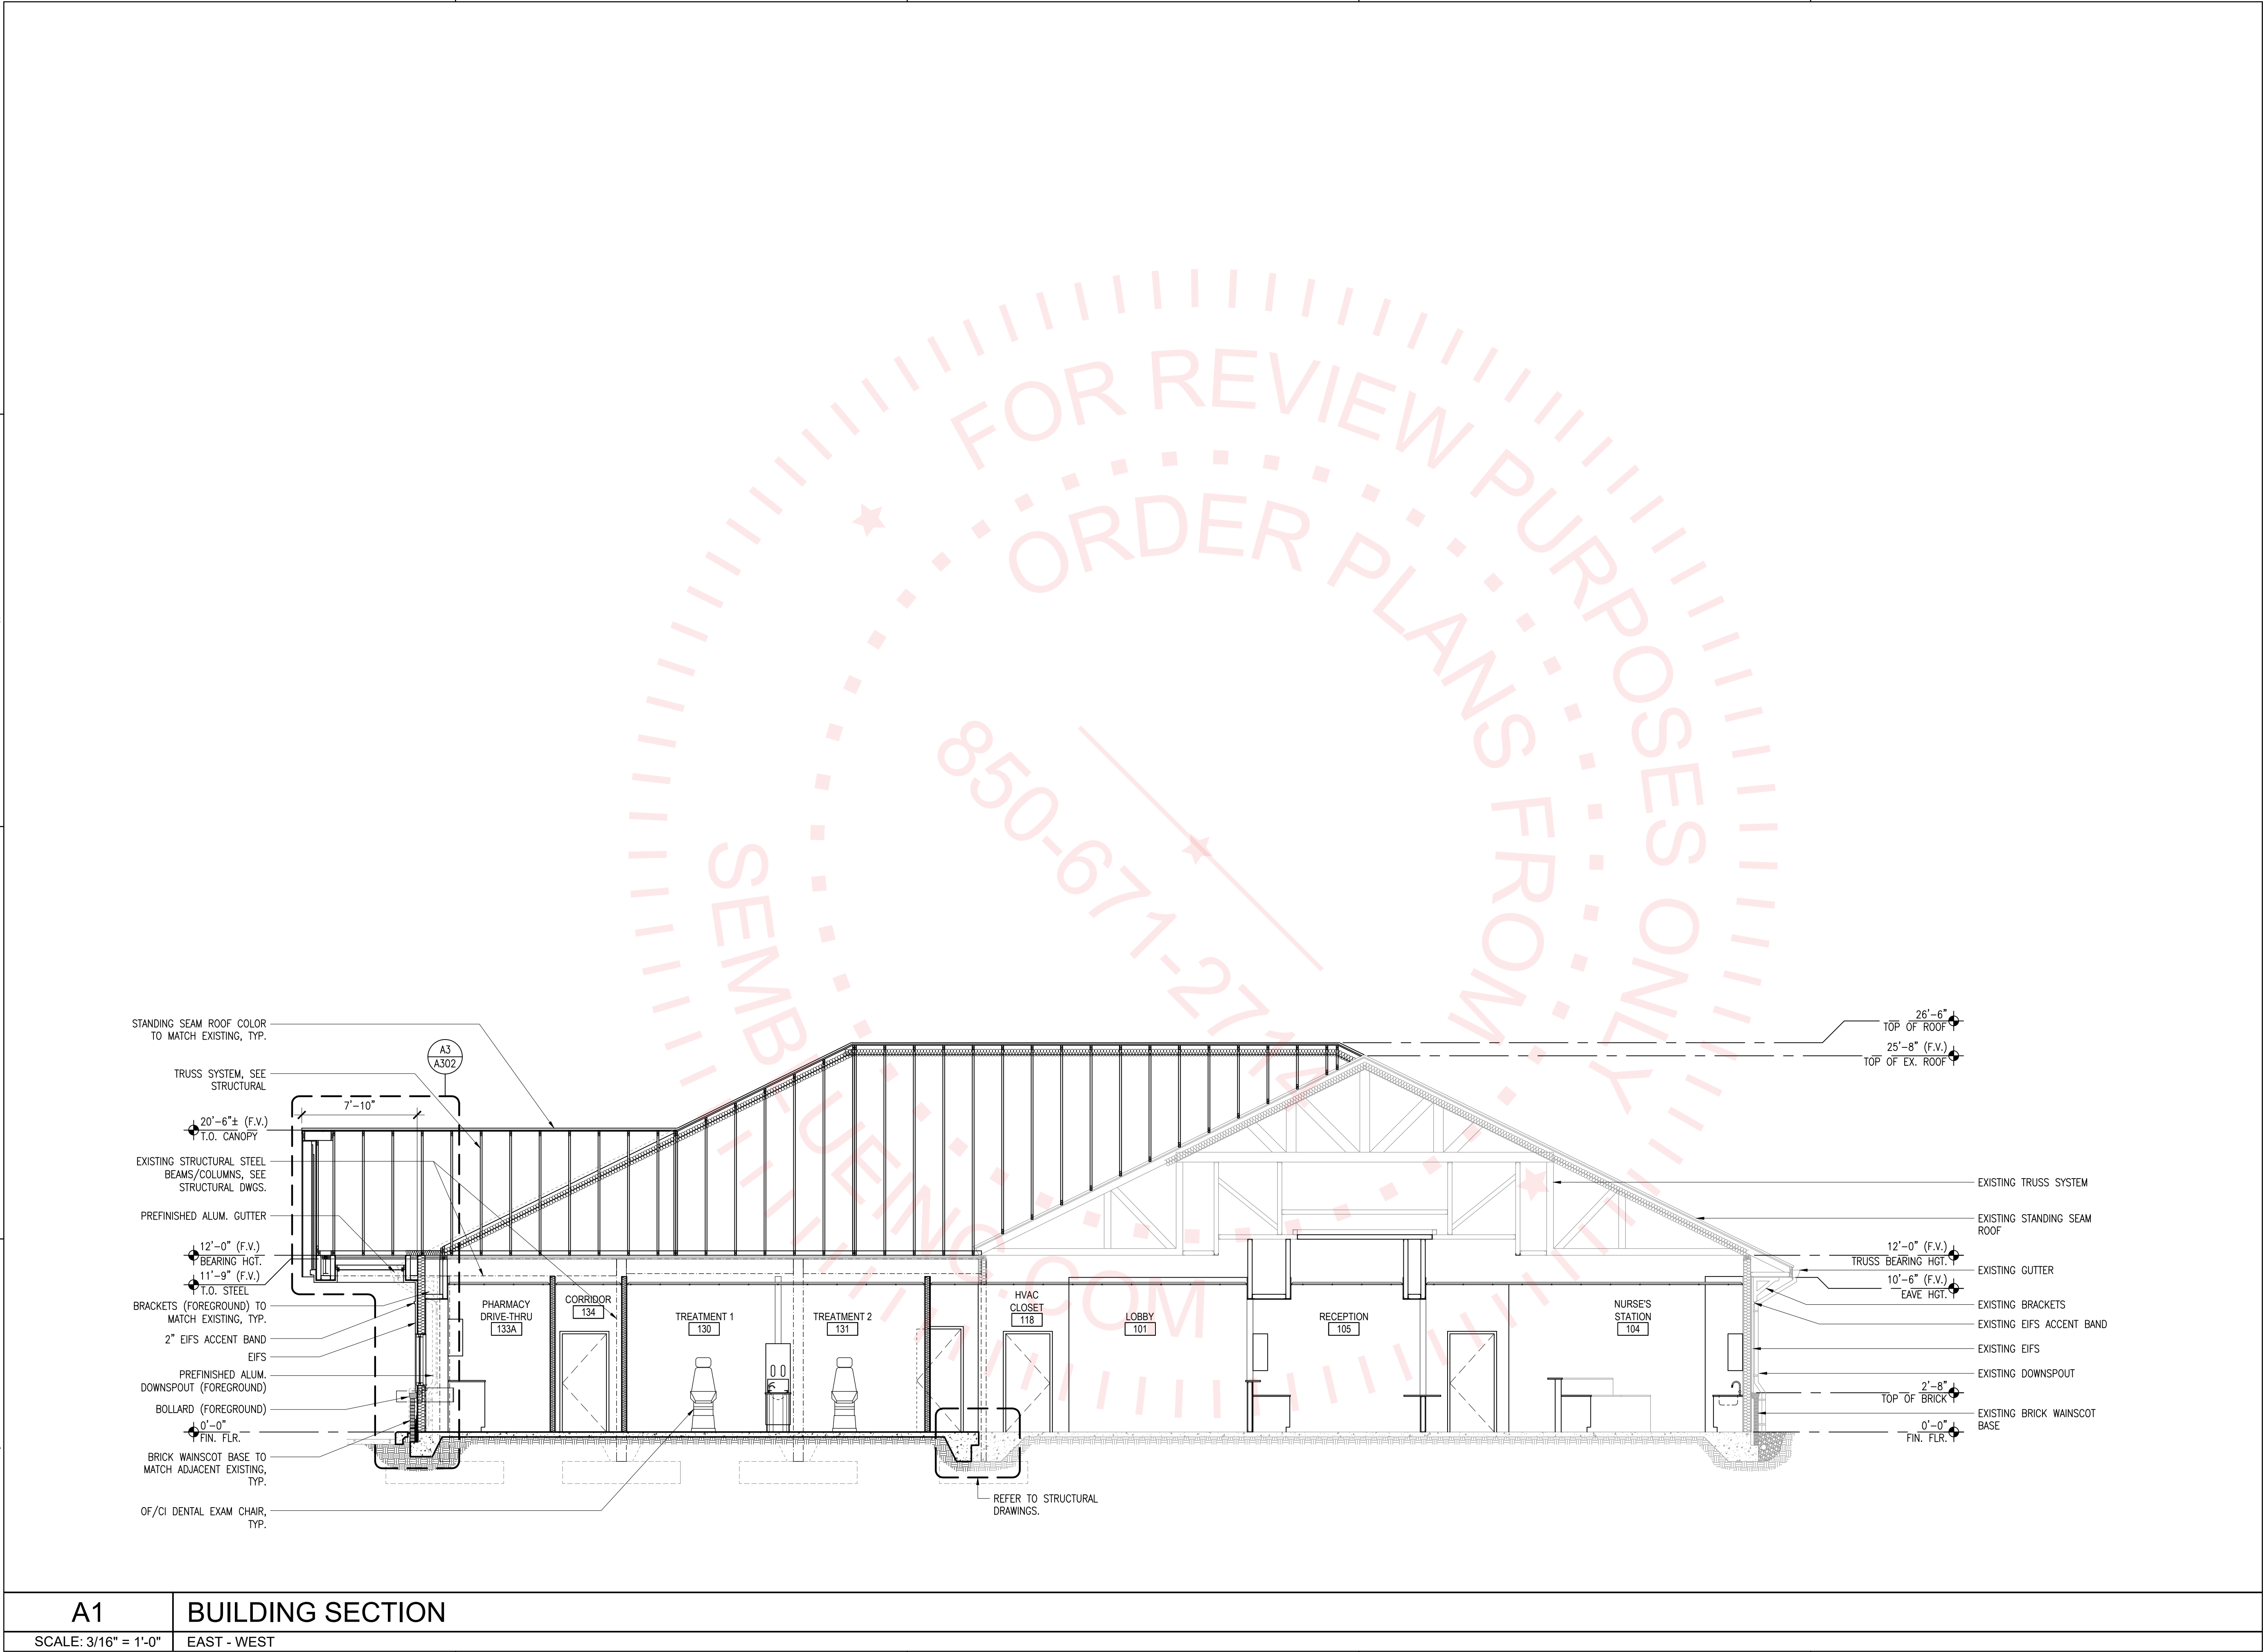

A1	BUILDING SECTION
SCALE: 3/16" = 1'-0"	EAST - WEST

DAG

ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.

**RENOVATIONS &
NEW CONSTRUCTION**

FOR PANCARE CHIPLEY




1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:		
No.	Description	Date

BUILDING SECTION

PROJECT NUMBER	23071
DATED	02/05/2023

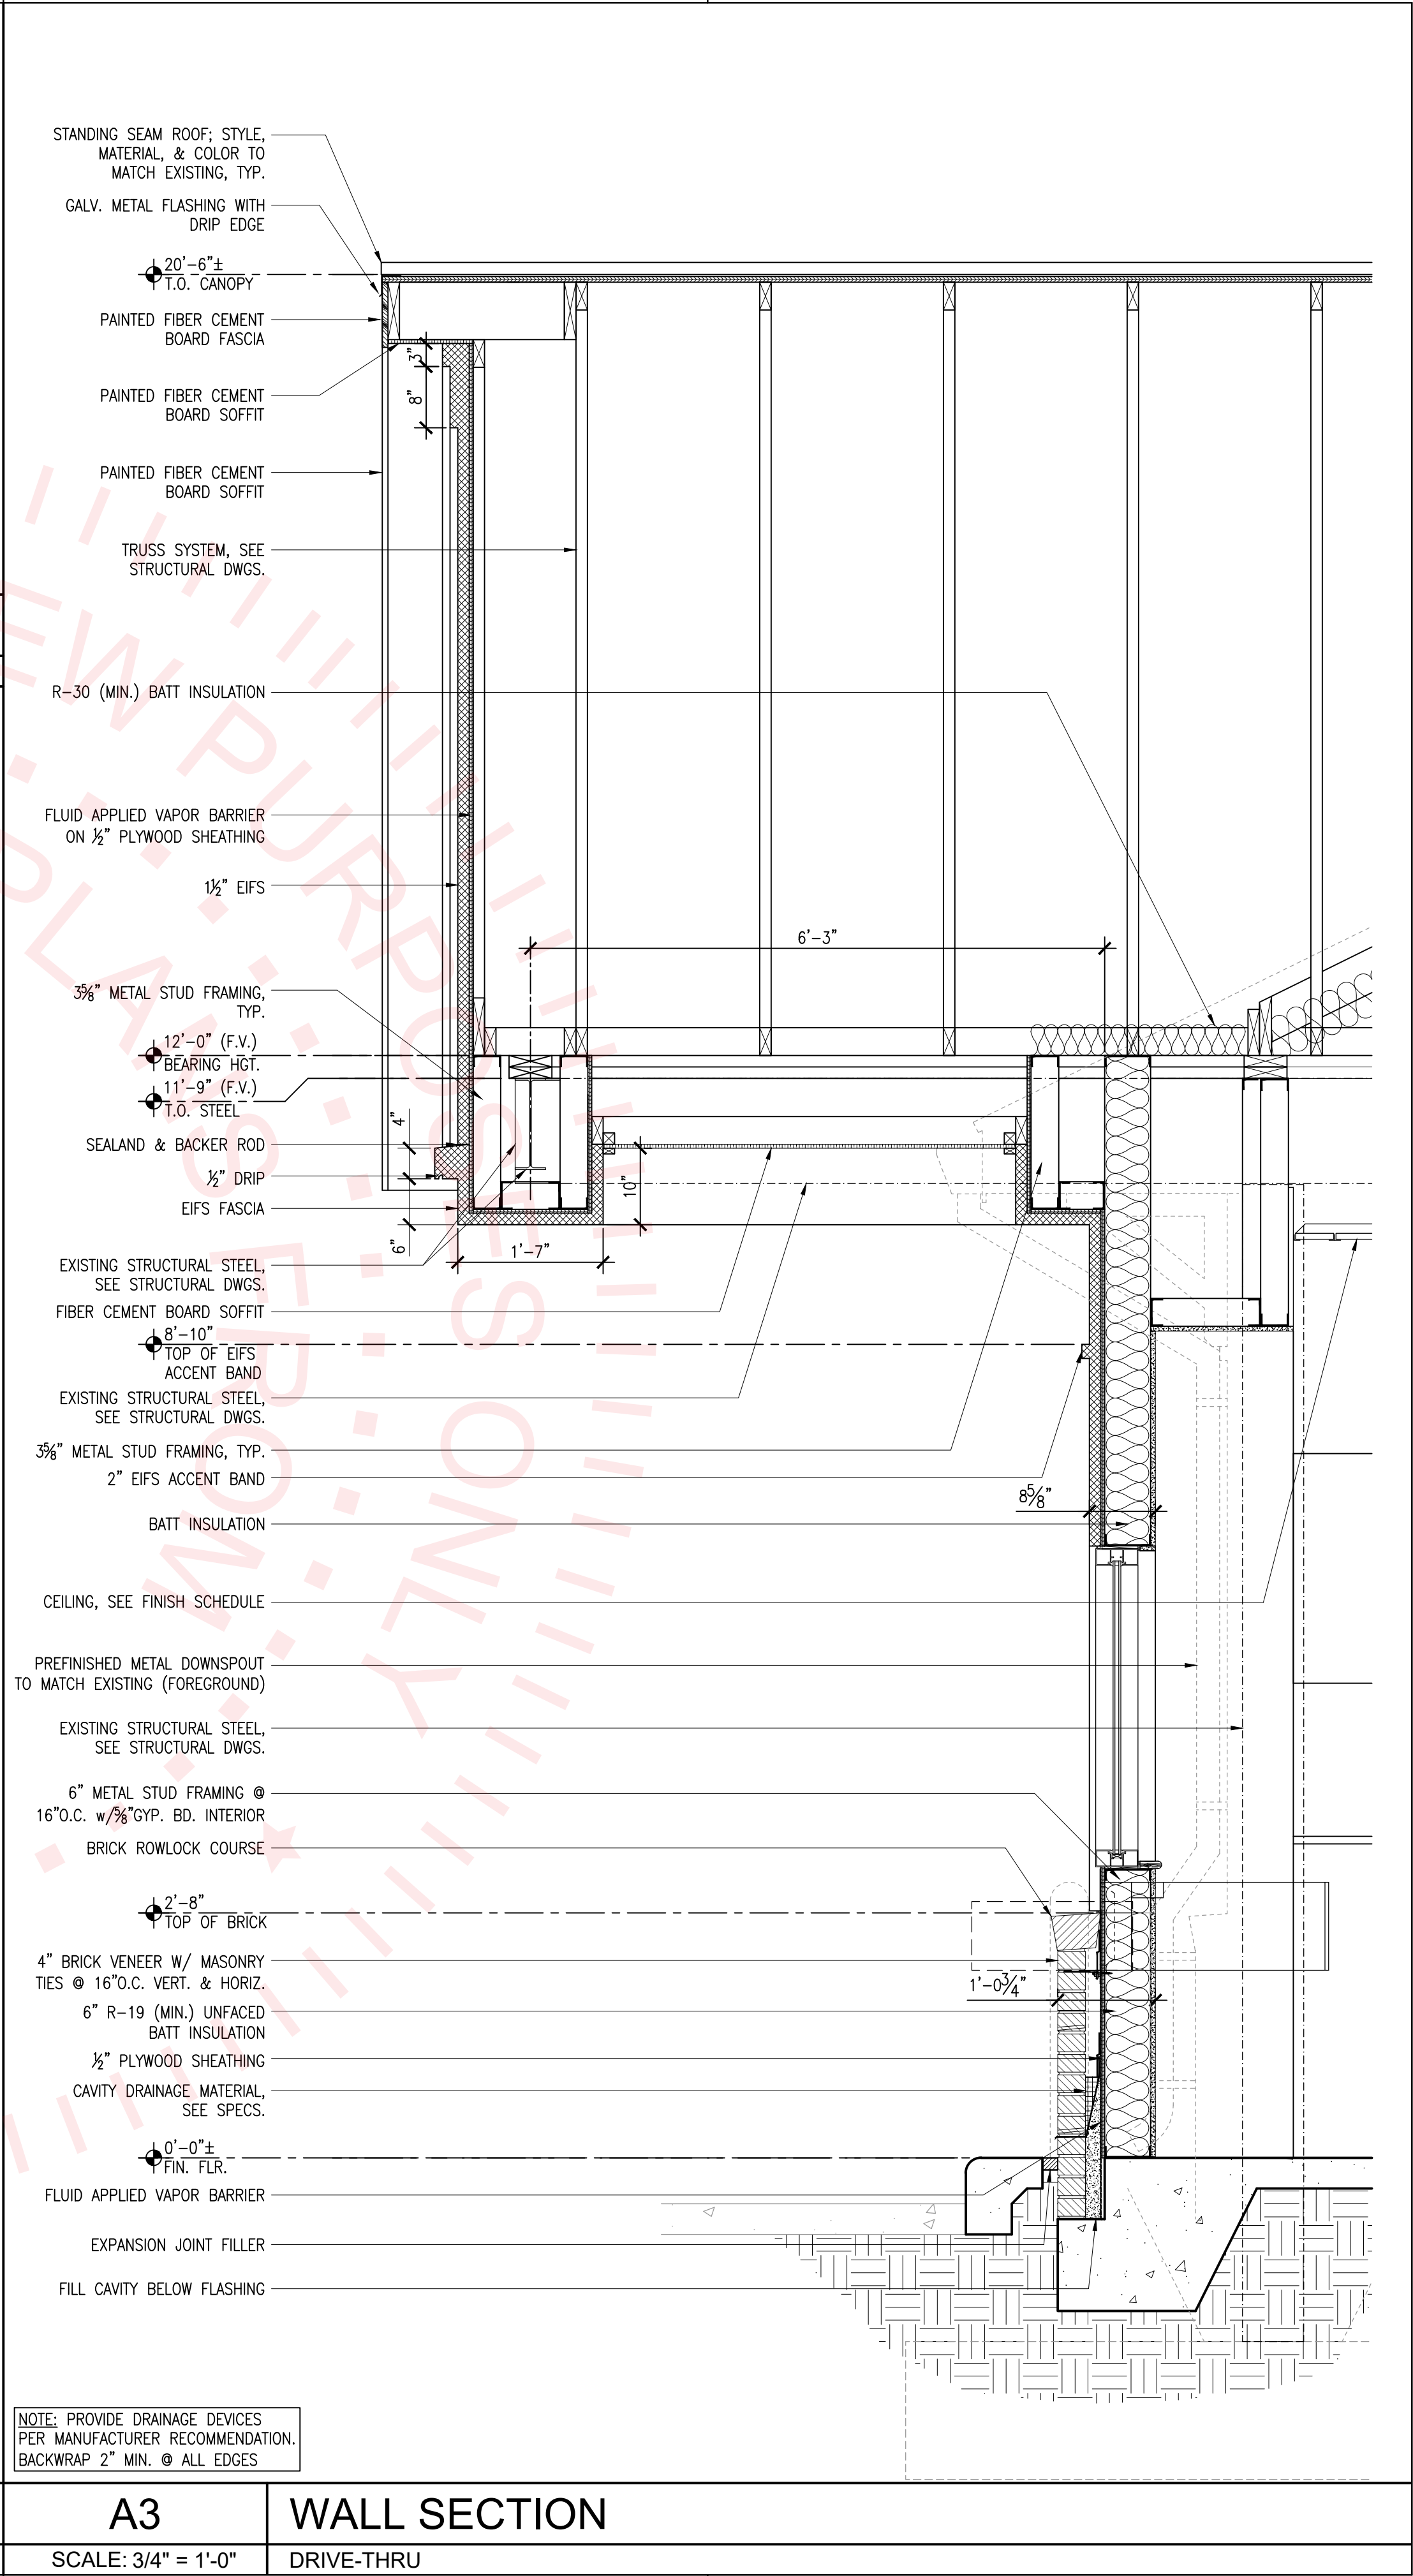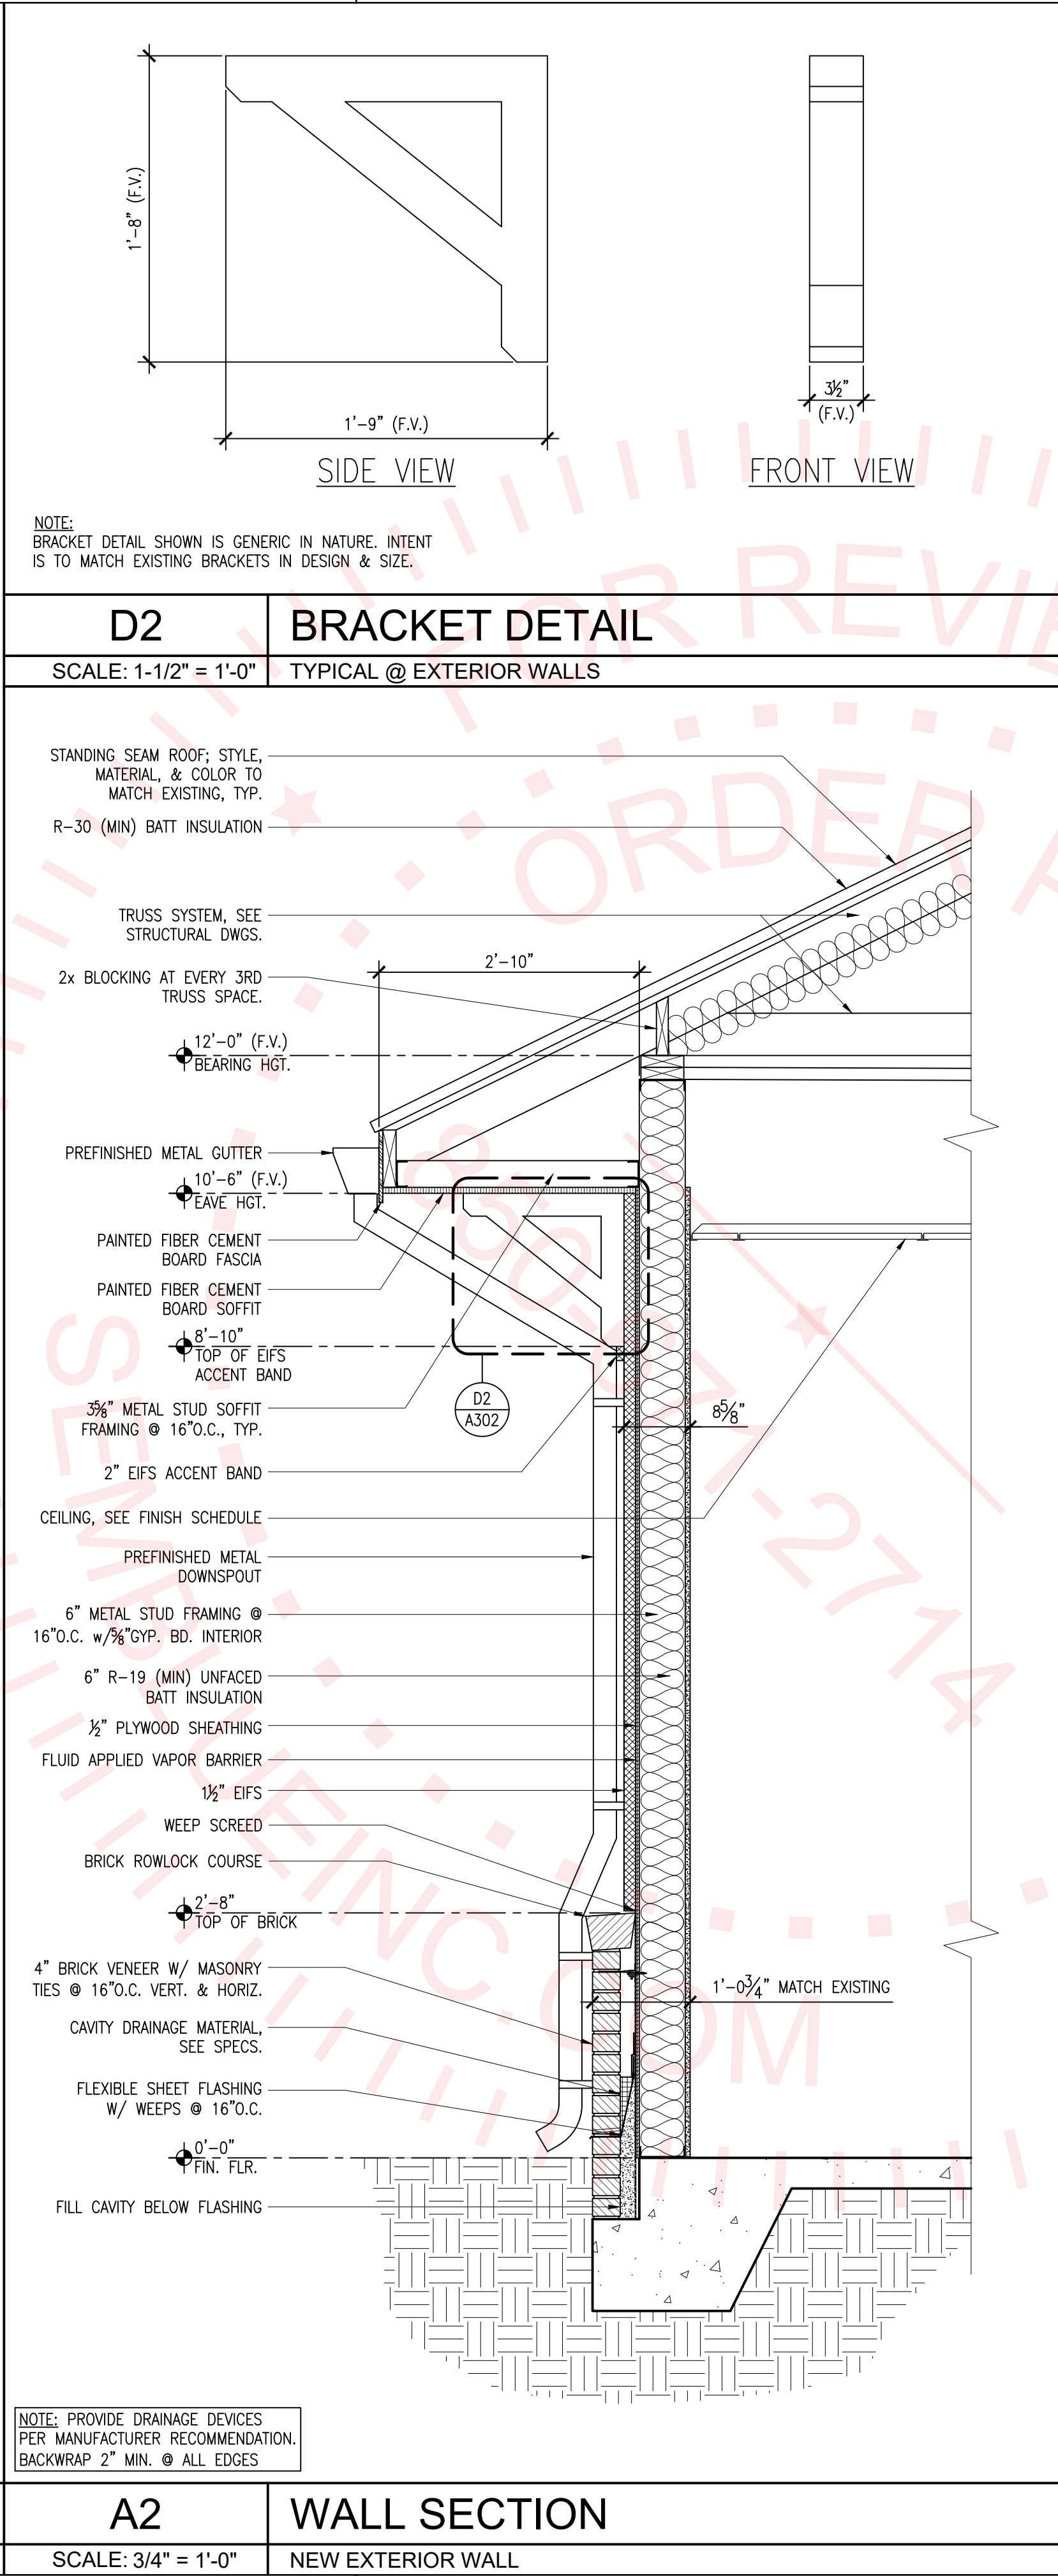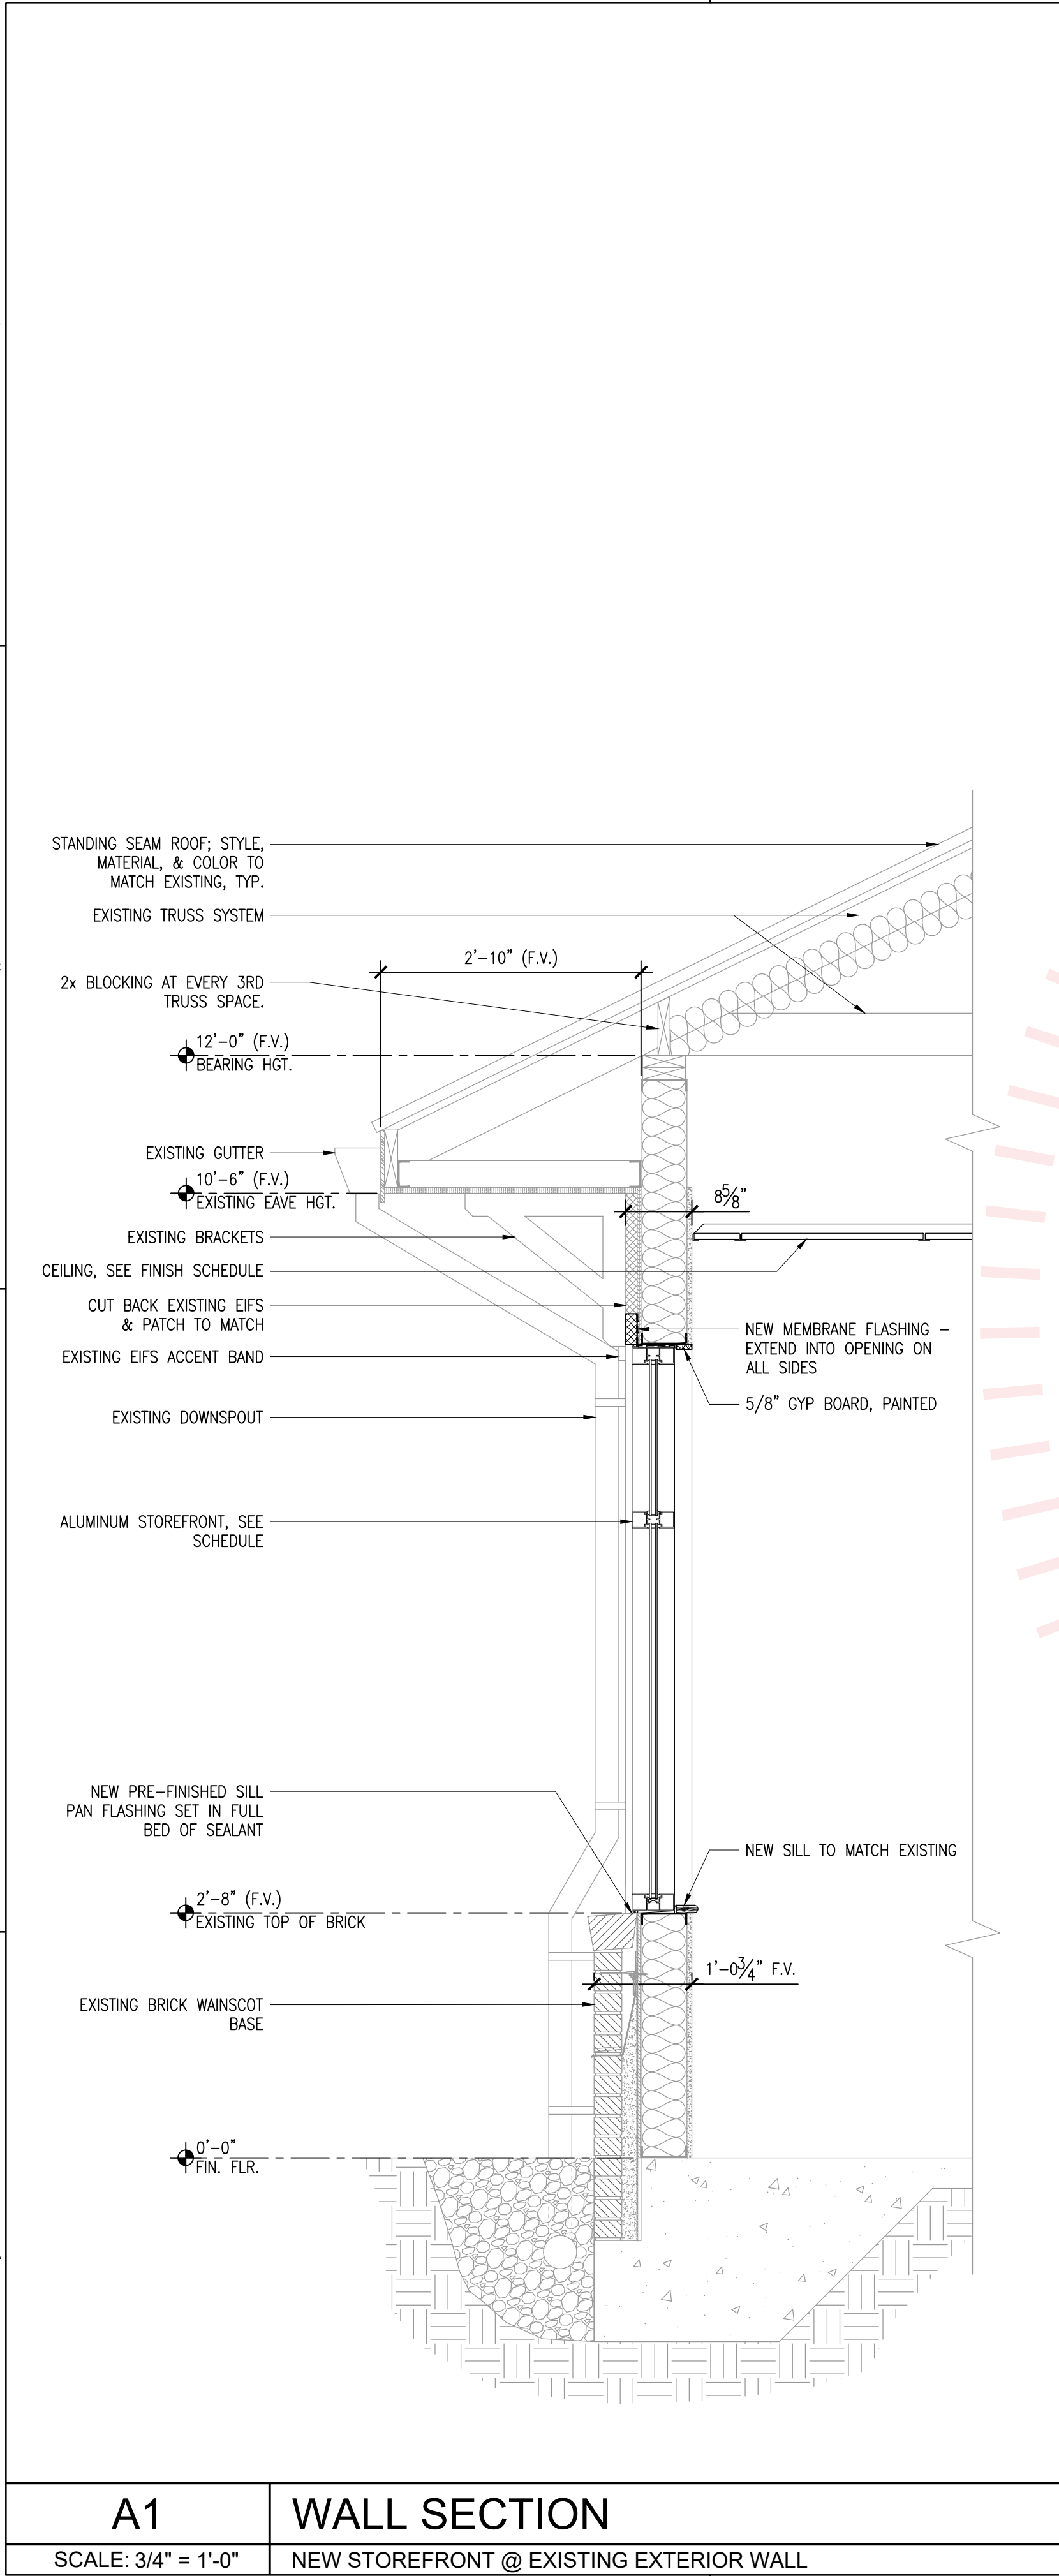

DAG

ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCRE OF FLORIDA, INC.



RENOVATIONS &
NEW CONSTRUCTION
FOR PANCRE CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:		
No.	Description	Date

WALL SECTIONS	
PROJECT NUMBER	23071
DATED	02/05/2023

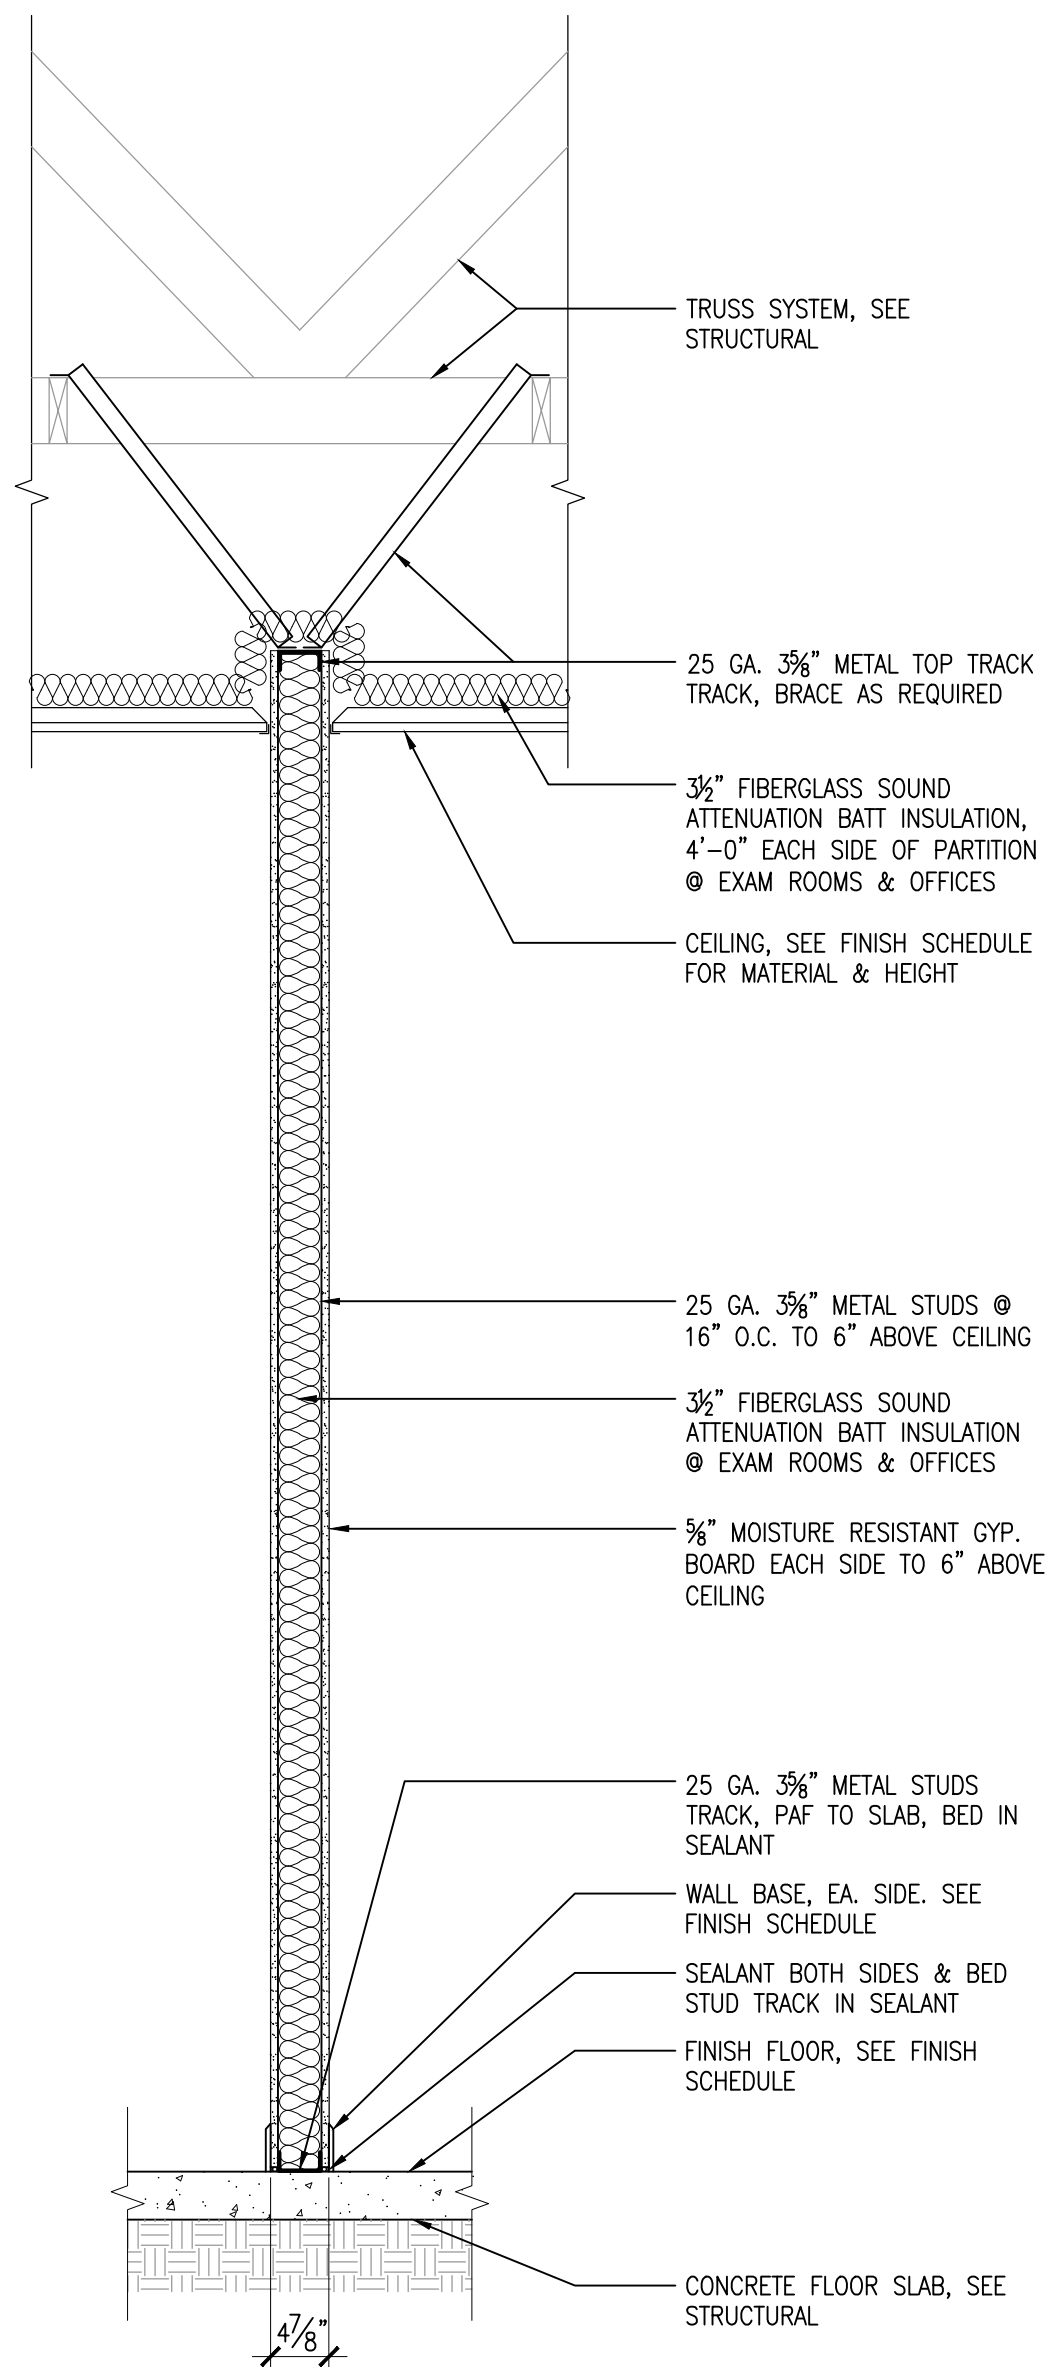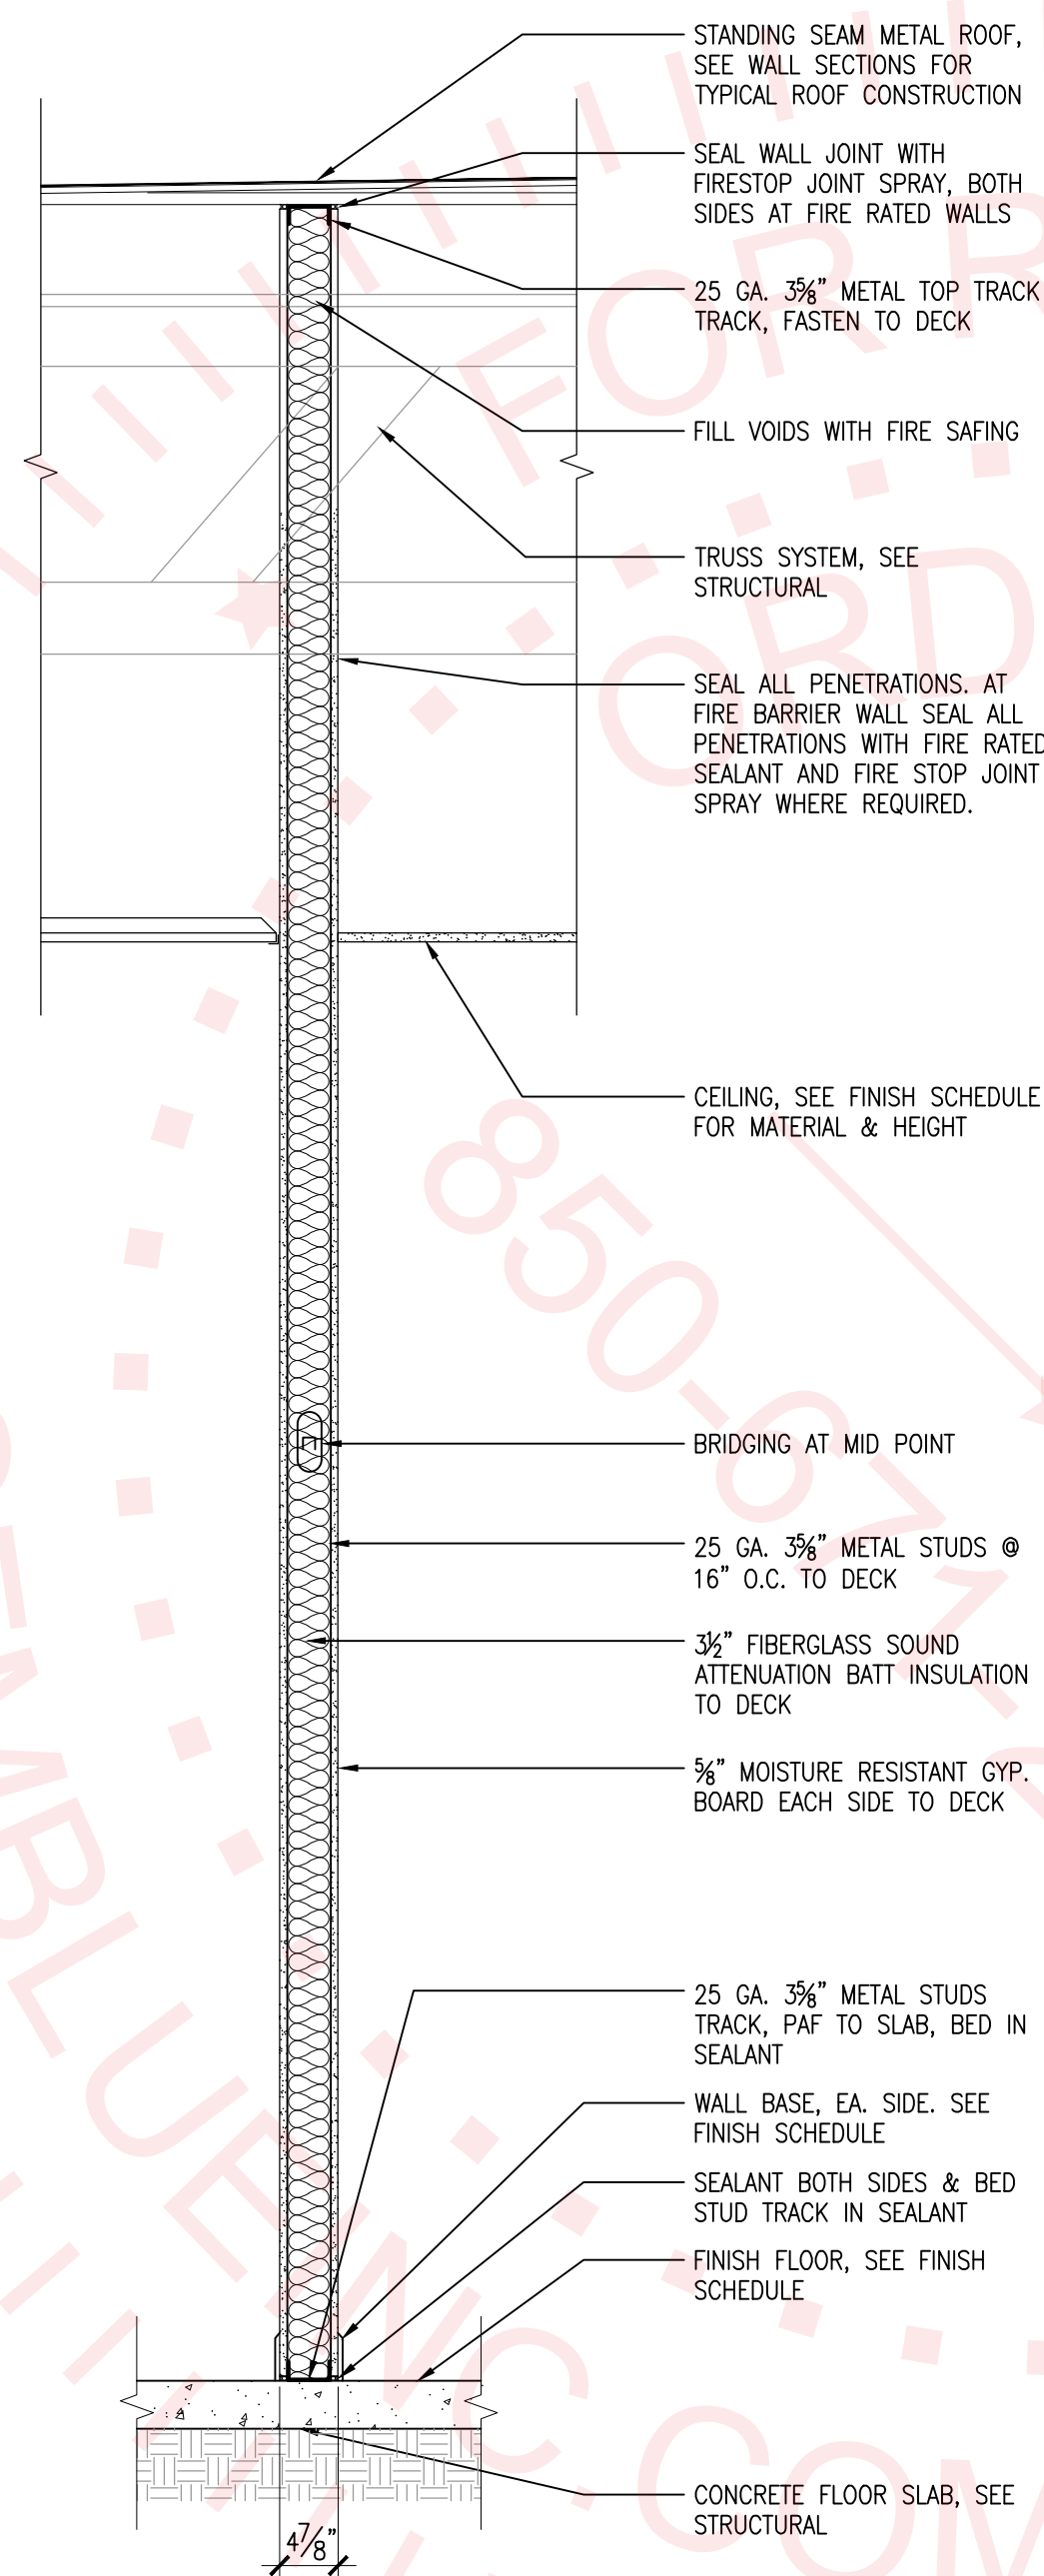 TRUSS SYSTEM, SEE STRUCTURAL 25 GA. 35/8" METAL TOP TRACK TRACK, BRACE AS REQUIRED 3/2" FIBERGLASS SOUND ATTENUATION BATT INSULATION, 4'-0" EACH SIDE OF PARTITION @ EXAM ROOMS & OFFICES CEILING, SEE FINISH SCHEDULE FOR MATERIAL & HEIGHT 25 GA. 35/8" METAL STUDS @ 16" O.C. TO 6" ABOVE CEILING 3/2" FIBERGLASS SOUND ATTENUATION BATT INSULATION @ EXAM ROOMS & OFFICES 5/8" MOISTURE RESISTANT GYP. BOARD EACH SIDE TO 6" ABOVE CEILING 25 GA. 35/8" METAL STUDS TRACK, PAF TO SLAB, BED IN SEALANT WALL BASE, EA. SIDE. SEE FINISH SCHEDULE SEALANT BOTH SIDES & BED STUD TRACK IN SEALANT FINISH FLOOR, SEE FINISH SCHEDULE CONCRETE FLOOR SLAB, SEE STRUCTURAL 4 7/8"		 STANDING SEAM METAL ROOF, SEE WALL SECTIONS FOR TYPICAL ROOF CONSTRUCTION SEAL WALL JOINT WITH FIRESTOP JOINT SPRAY, BOTH SIDES AT FIRE RATED WALLS 25 GA. 35/8" METAL TOP TRACK TRACK, FASTEN TO DECK FILL VOIDS WITH FIRE SAFING TRUSS SYSTEM, SEE STRUCTURAL SEAL ALL PENETRATIONS. AT FIRE BARRIER WALL SEAL ALL PENETRATIONS WITH FIRE RATED SEALANT AND FIRE STOP JOINT SPRAY WHERE REQUIRED. CEILING, SEE FINISH SCHEDULE FOR MATERIAL & HEIGHT BRIDGING AT MID POINT 25 GA. 35/8" METAL STUDS @ 16" O.C. TO DECK 3/2" FIBERGLASS SOUND ATTENUATION BATT INSULATION TO DECK 5/8" MOISTURE RESISTANT GYP. BOARD EACH SIDE TO DECK 25 GA. 35/8" METAL STUDS TRACK, PAF TO SLAB, BED IN SEALANT WALL BASE, EA. SIDE. SEE FINISH SCHEDULE SEALANT BOTH SIDES & BED STUD TRACK IN SEALANT FINISH FLOOR, SEE FINISH SCHEDULE CONCRETE FLOOR SLAB, SEE STRUCTURAL 4 7/8"	
PARTITION NOTES: 1. FIRE BARRIER AT WALL TYPE W-1; CONSTRUCT WALL IN ACCORDANCE WITH UL U905 AND U419. STENCIL ABOVE CEILING AS NOTED ON A-101. SEE A-101 FLOOR PLAN FOR LOCATIONS.		PARTITION NOTES: 1. FIRE BARRIER AT WALL TYPE W-2; CONSTRUCT WALL IN ACCORDANCE WITH UL U905 AND U419. STENCIL ABOVE CEILING AS NOTED ON A-101. SEE A-101 FLOOR PLAN FOR LOCATIONS. 2. PARTITION TYPE W-2A SAME AS TYPE W-2, BUT UTILIZES 6" CFS STUDS INSTEAD OF 35/8"	
A1	PARTITION TYPE W-1	A2	PARTITION TYPE W-2
SCALE: 3/4" = 1'-0"	OFFICES, EXAM ROOMS, EQUIPMENT ROOMS	SCALE: 3/4" = 1'-0"	TOILETS, EQUIPMENT ROOMS

WALL / PARTITION NOTES

1. SEAL WALL JOINTS AND AT THE ROOF DECK TO ENSURE ACOUSTICAL INTEGRITY (ALL WALLS) AND FIRE RATING (WHERE REQUIRED).
2. BRACE ALL WALLS THAT TERMINATE AT 6" ABOVE CEILINGS.
3. STENCIL ABOVE CEILING ON BOTH SIDES OF ALL FIRE RATED WALLS 3" HIGH LETTERING TO READ "FIRE BARRIER- PROTECT ALL OPENINGS".
4. ALL ROOMS WITHOUT CEILING HAVE FINISHED, PAINTED GYPSUM BOARD FROM TOP OF SLAB TO BOTTOM OF DECK.
5. PROVIDE TILE BACKERBOARD BEHIND TILE.
6. PROVIDE MOISTURE RESISTANT BACKERBOARD ABOVE TILE, IN JANITOR'S CLOSET AND DAMP LOCATIONS.



ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.
**RENOVATIONS &
NEW CONSTRUCTION**
FOR PANCARE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428





REVISIONS:		
No.	Description	Date

PARTITION TYPES


PROJECT NUMBER	23071
DATED	02/05/2023

A-303

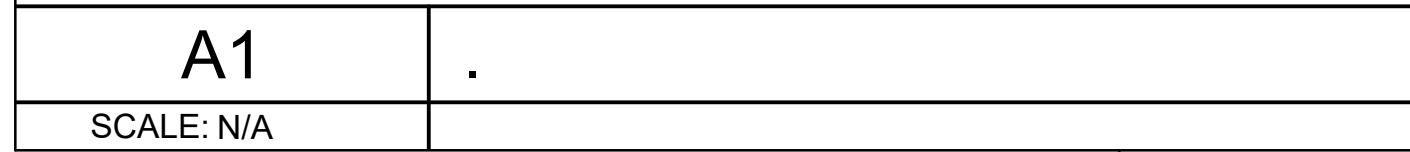


A4	ENLARGED PLAN
SCALE: 3/8" = 1'-0"	NURSE'S STATION #104


A-401

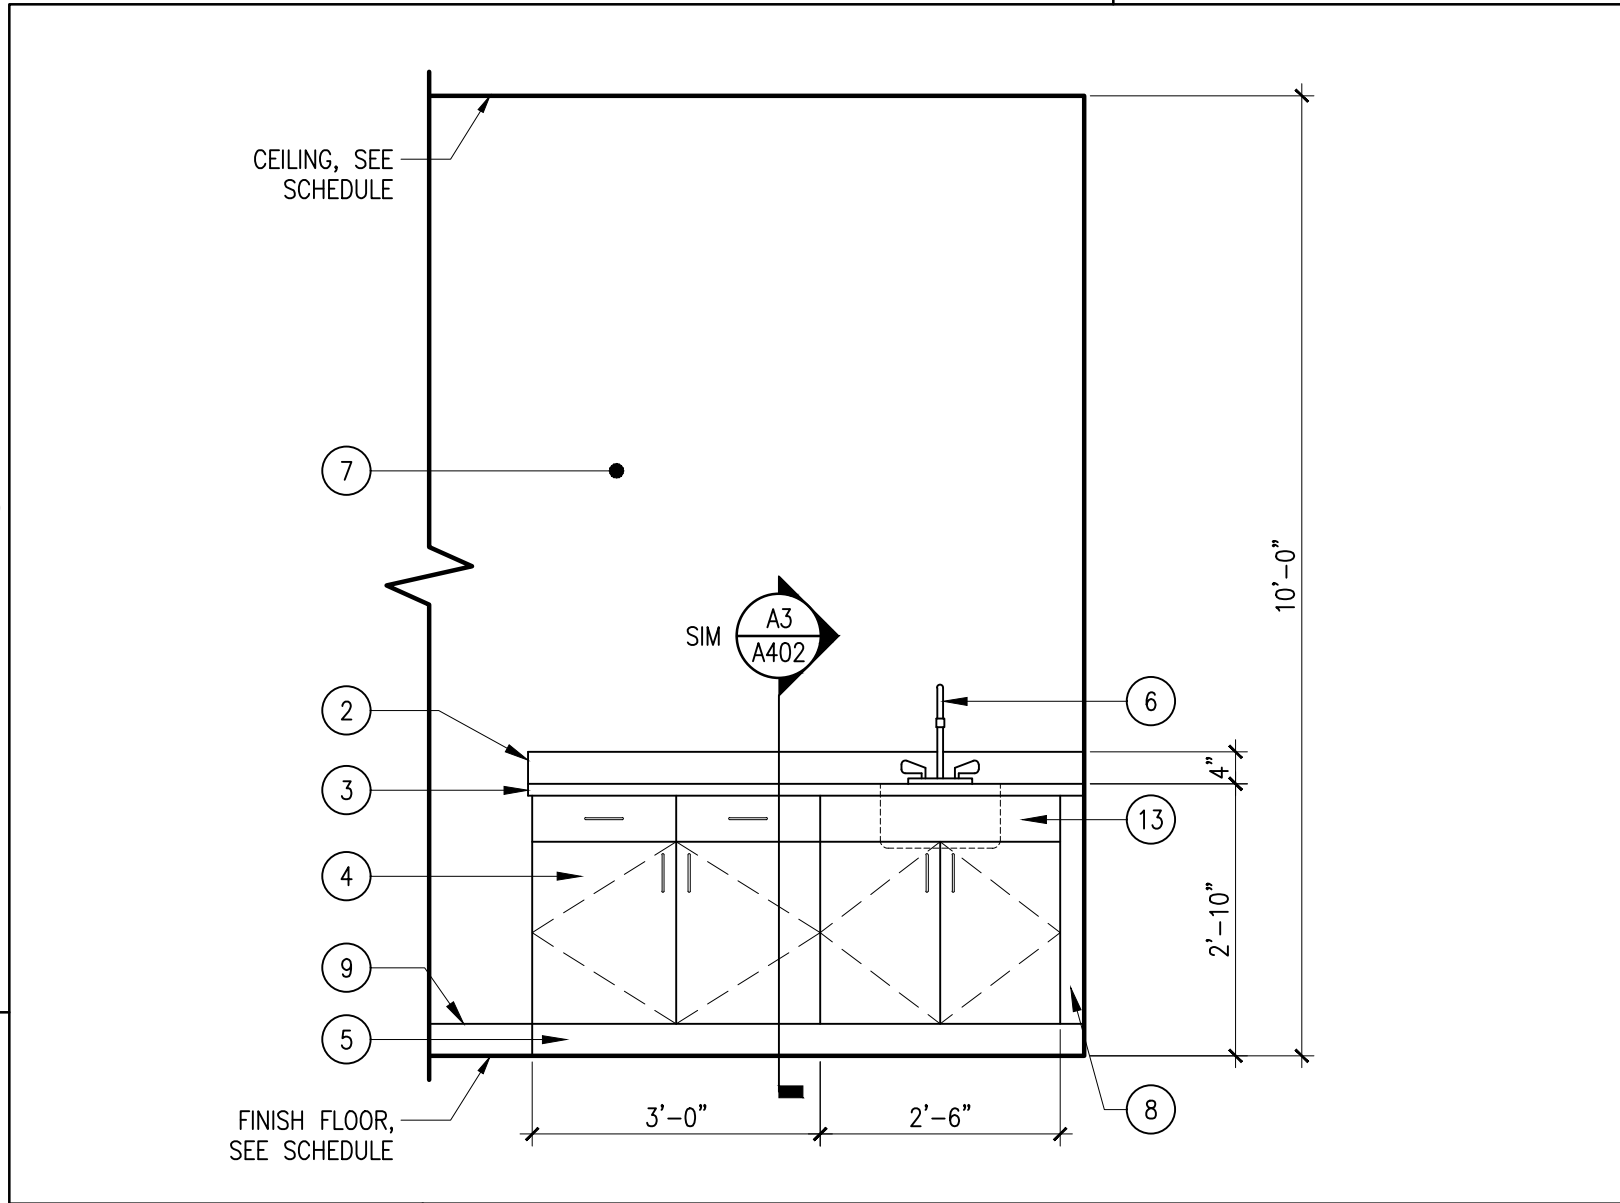

C1	INTERIOR ELEVATION
SCALE: 1/2" = 1'-0"	TYPICAL EXAM ROOM CASEWORK

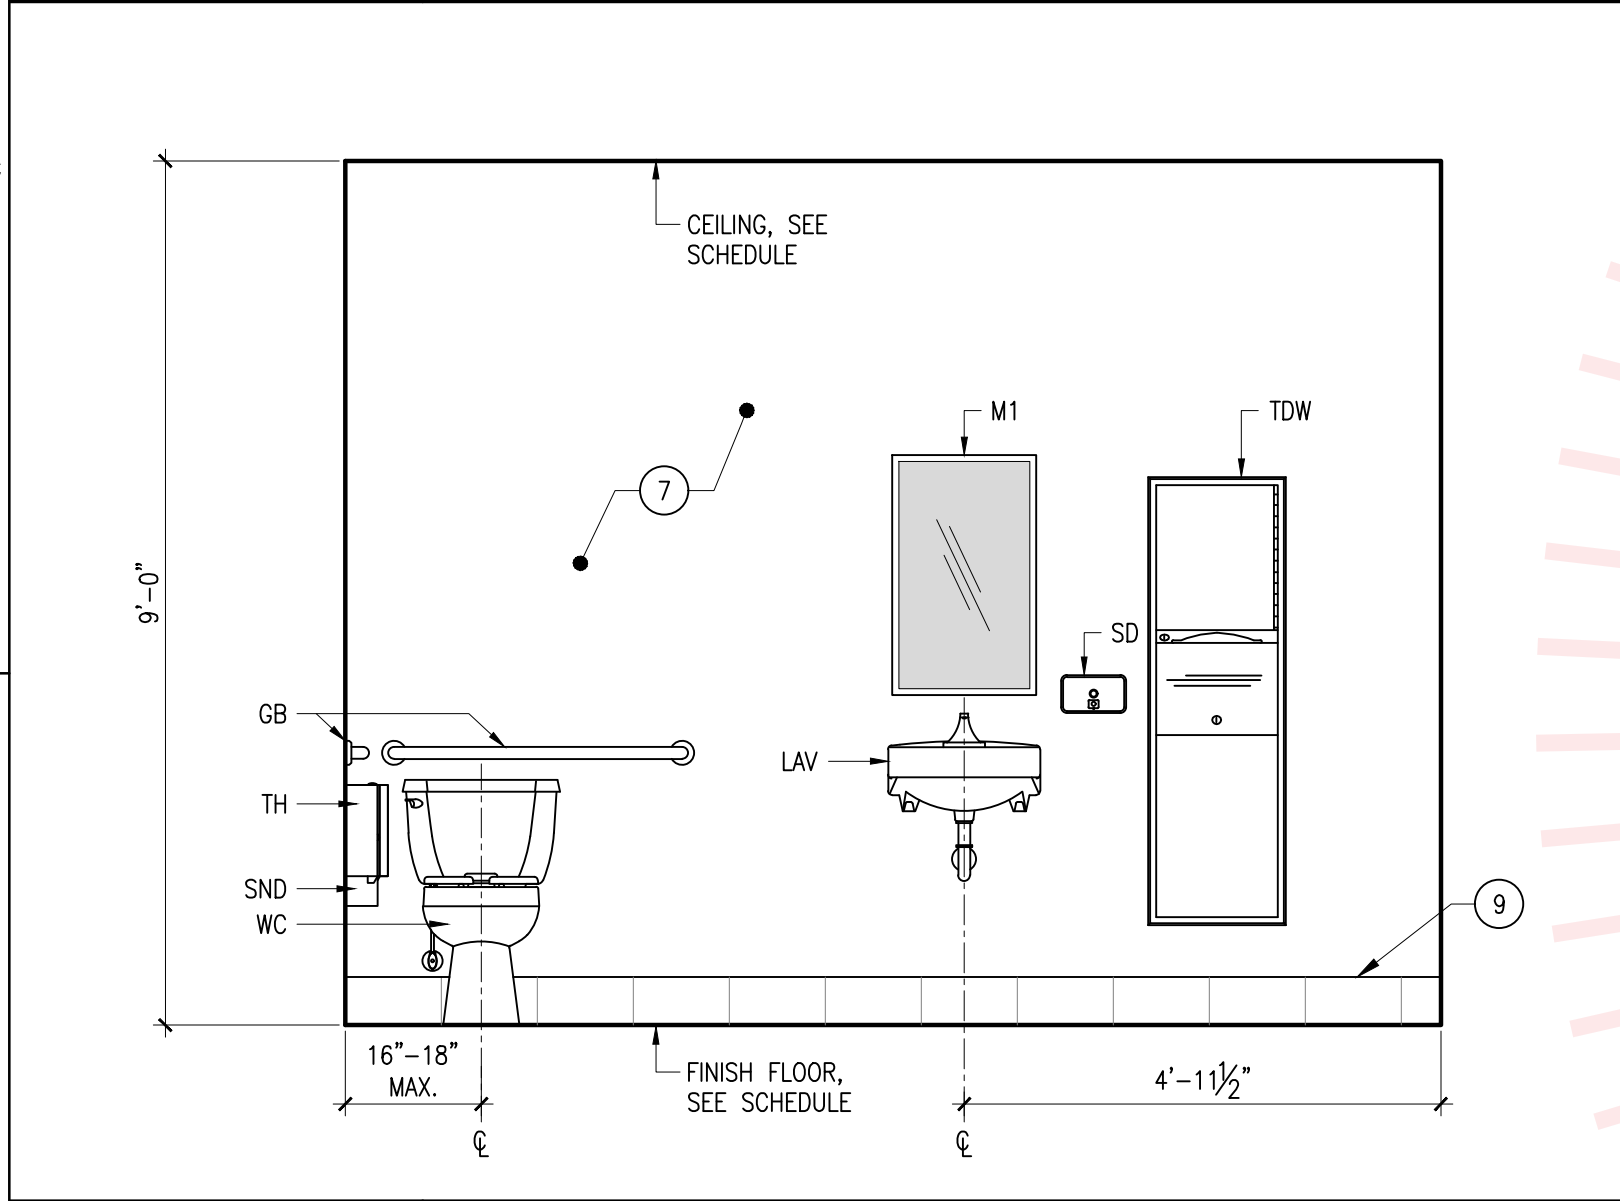


B1	INTERIOR ELEVATION
SCALE: 1/2" = 1'-0"	TOILET #135

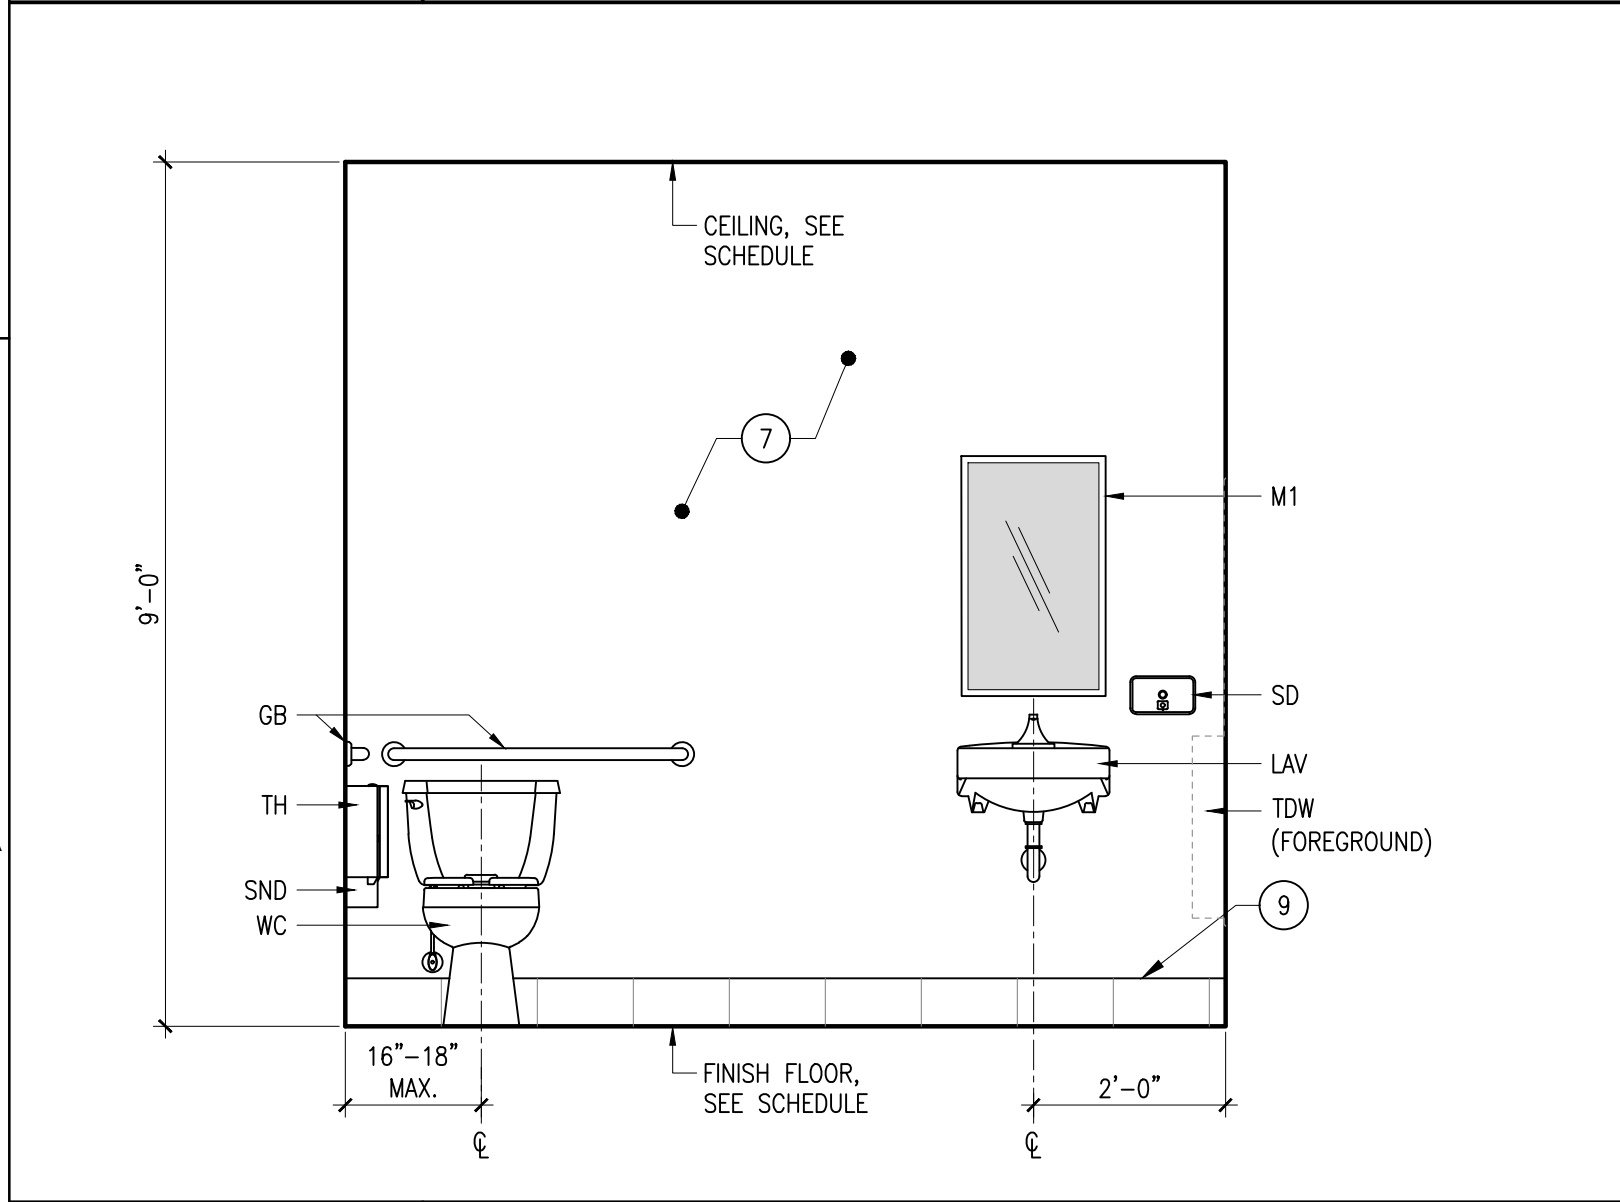


A1	INTERIOR ELEVATION
SCALE: 1/2" = 1'-0"	TOILET #108



C2	INTERIOR ELEVATION
SCALE: N/A	

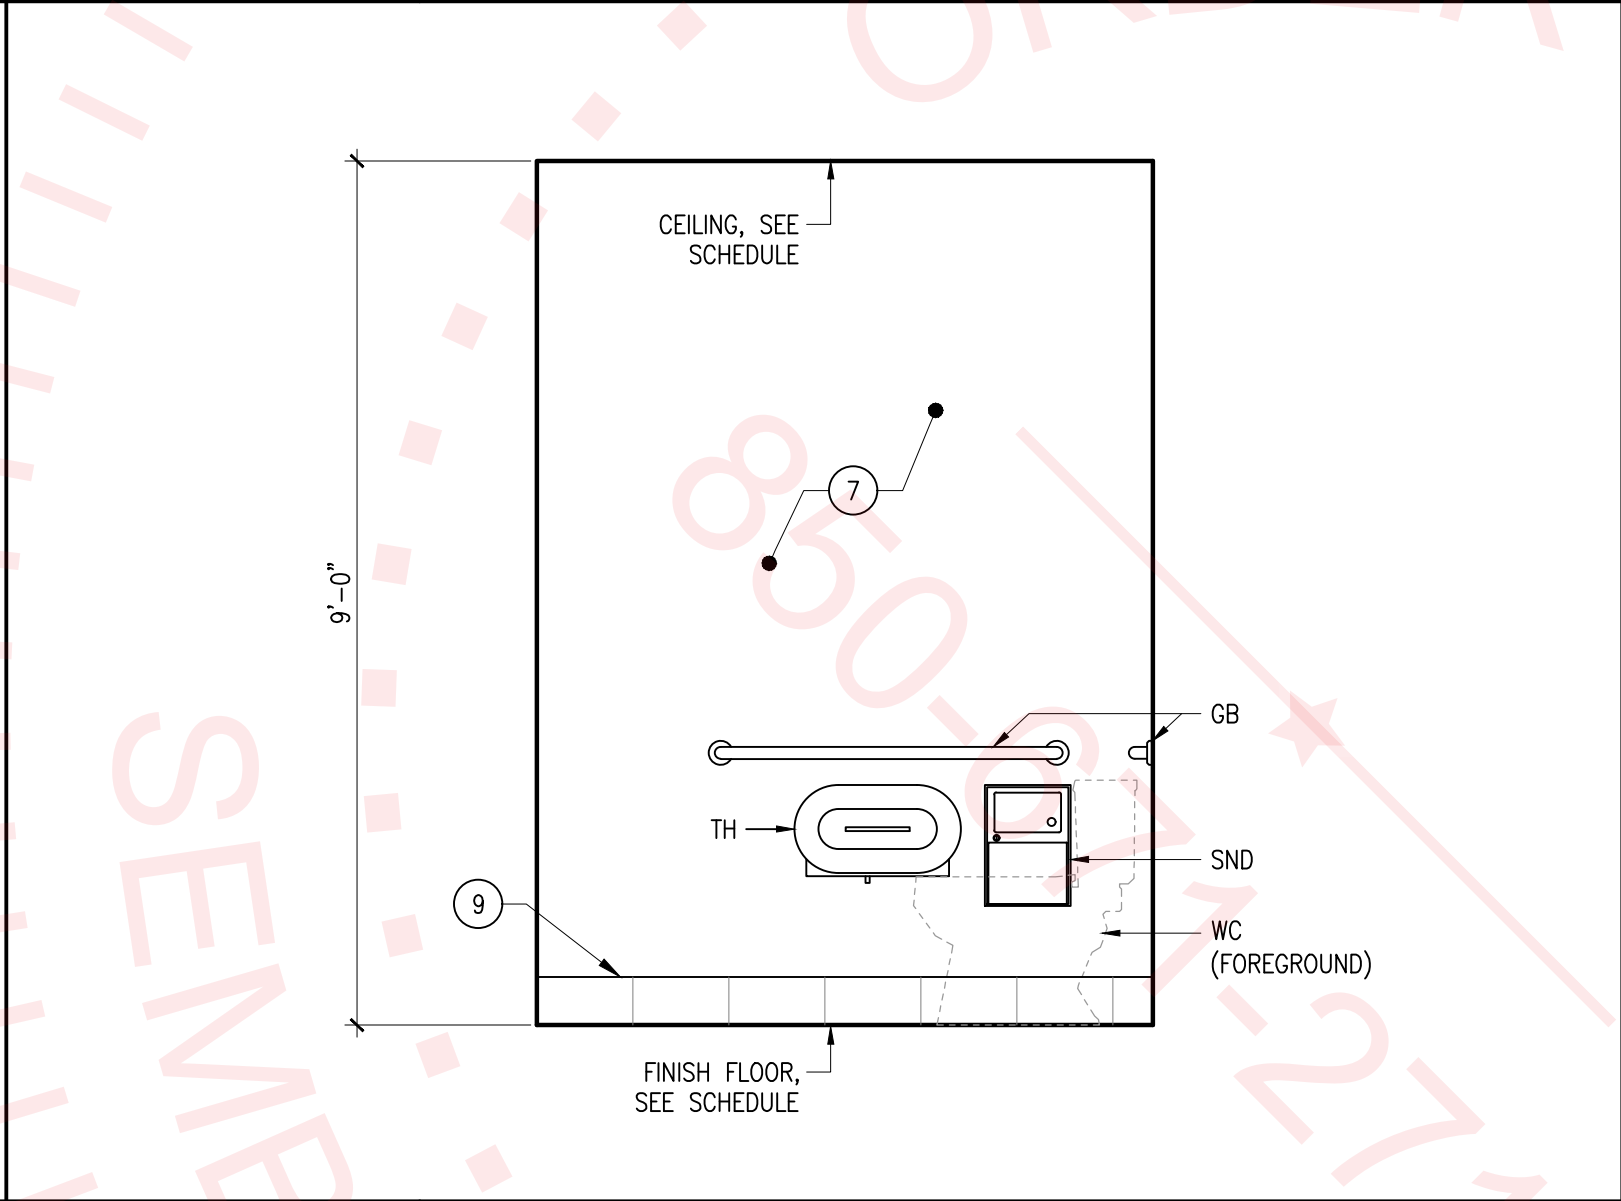


B2	INTERIOR ELEVATION
SCALE: 1/2" = 1'-0"	TOILET #135

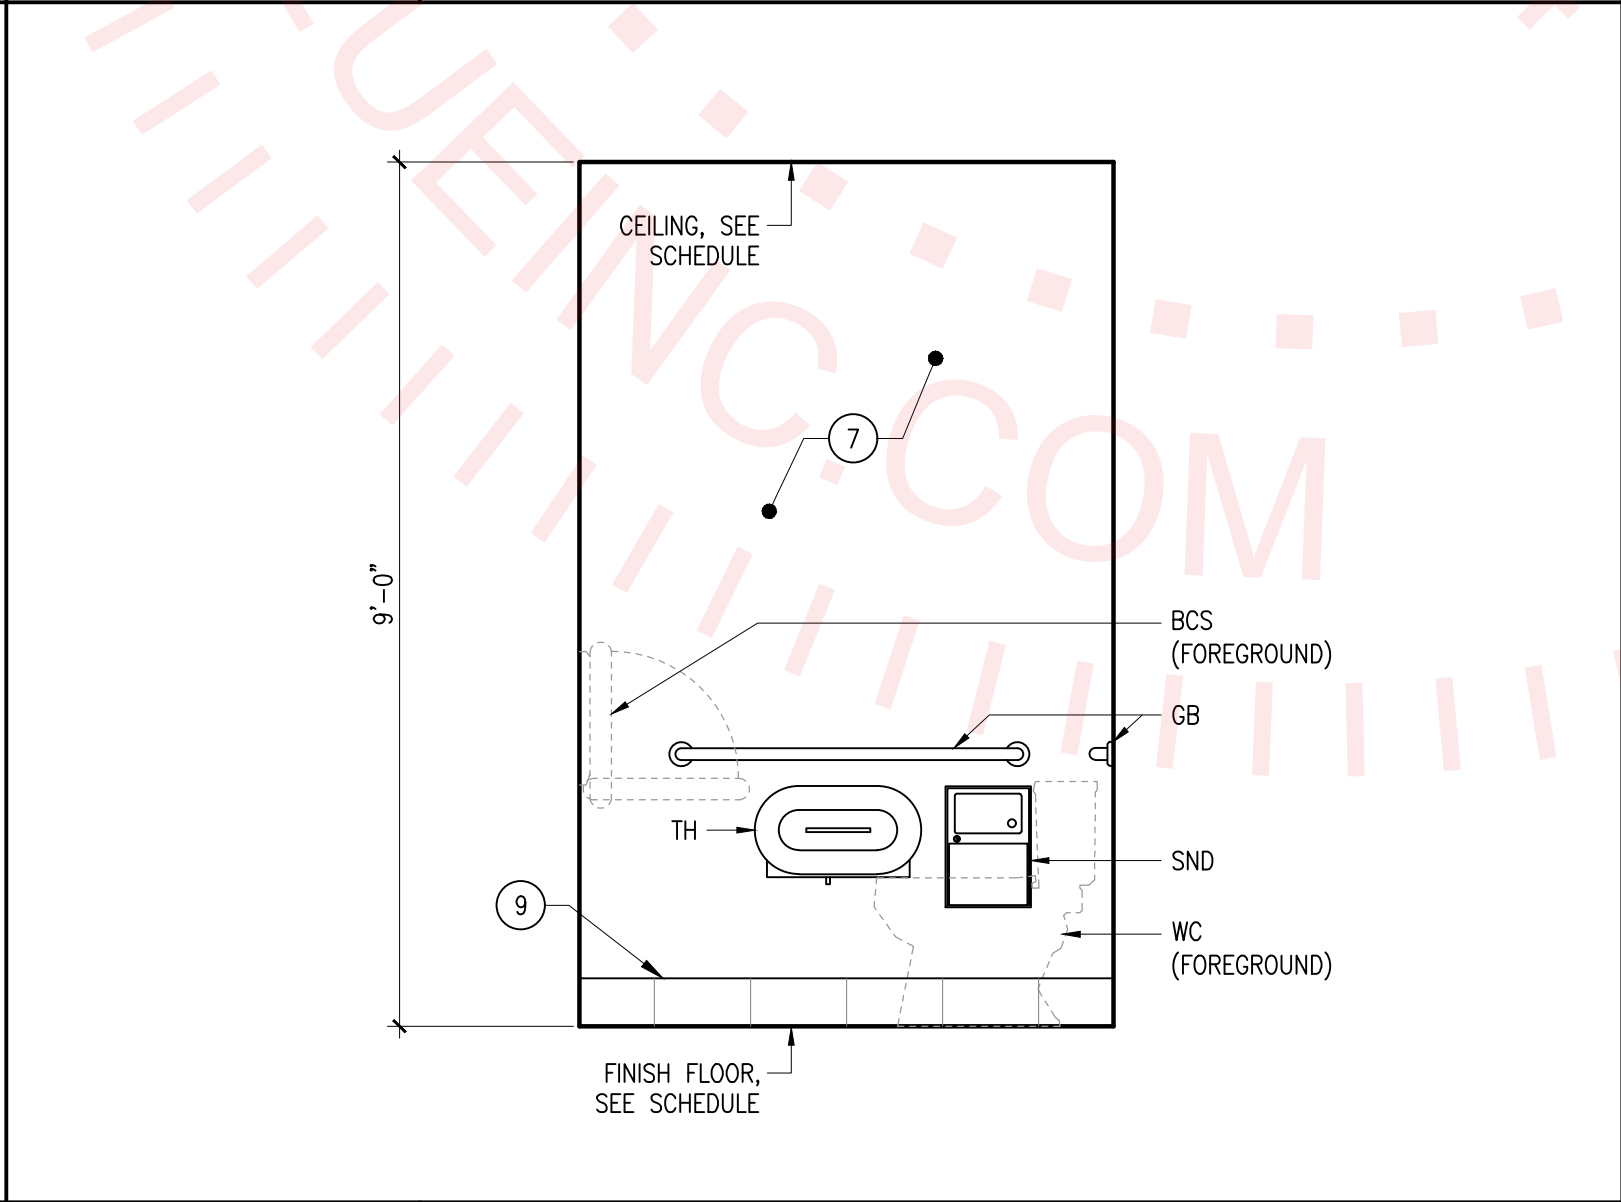

A2	INTERIOR ELEVATION
SCALE: 1/2" = 1'-0"	TOILET #108



C3	TYPICAL CASEWORK SECTION
SCALE: N/A	

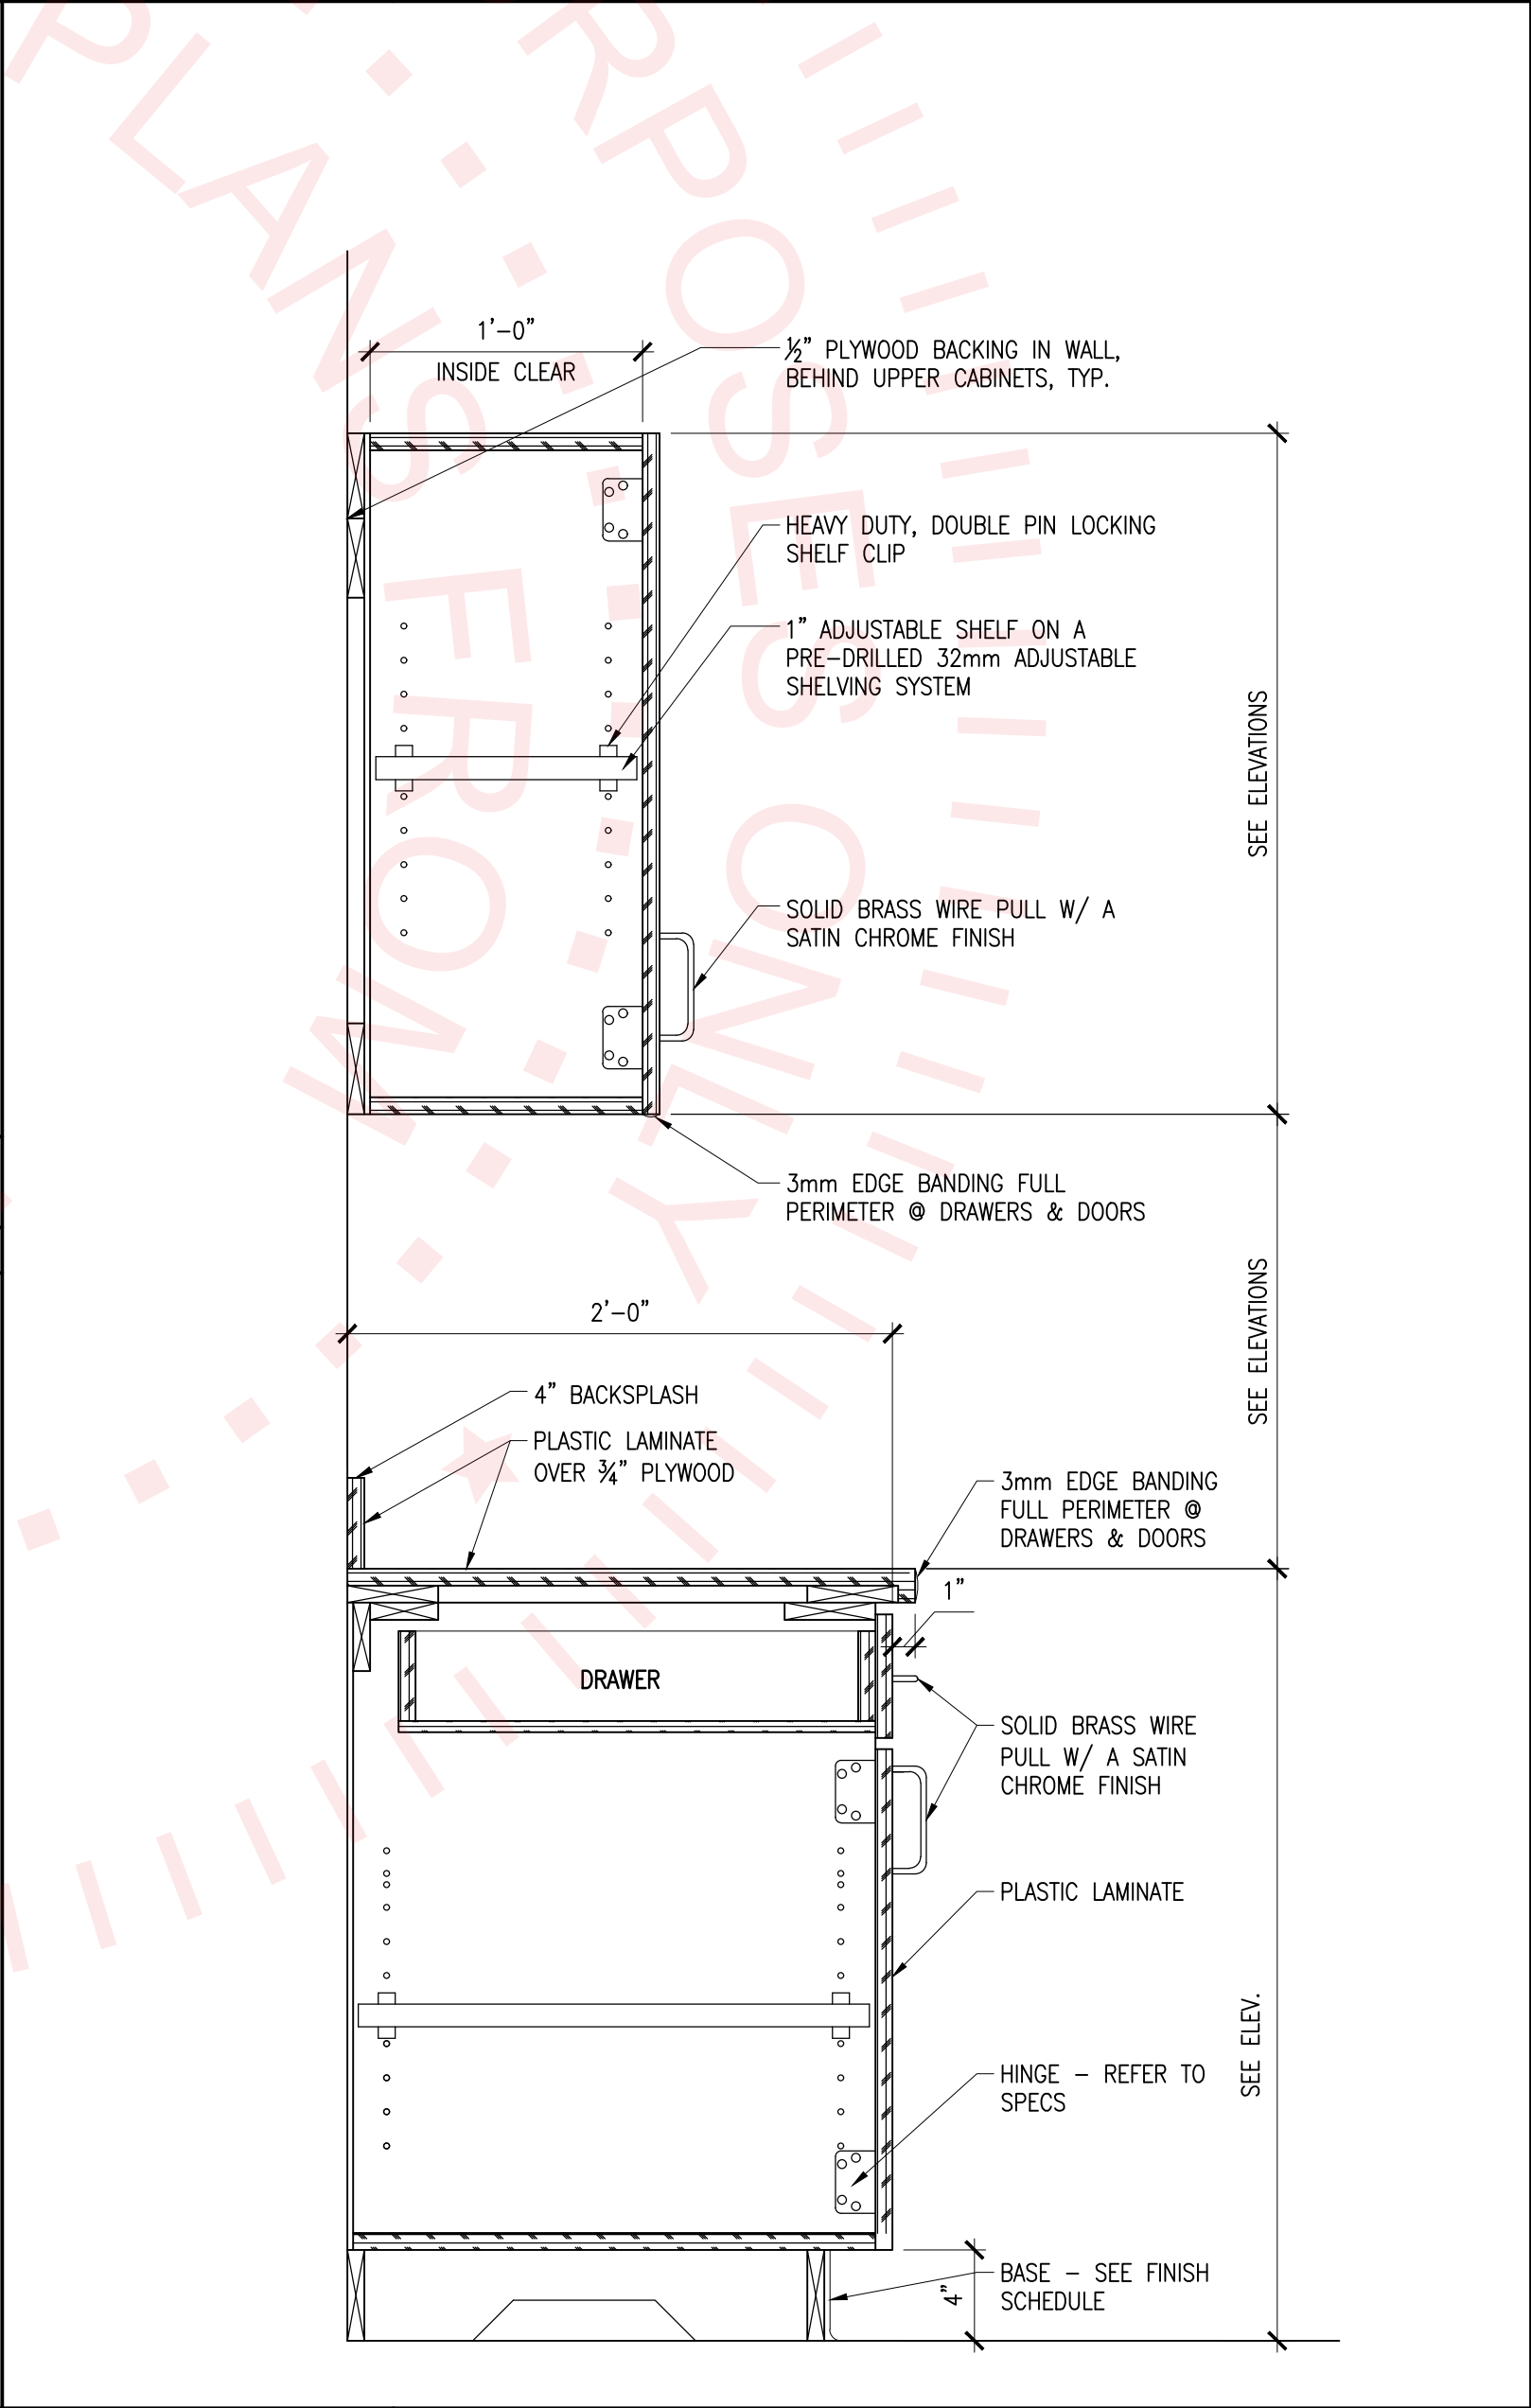

A3	TYPICAL CASEWORK SECTION
SCALE: 1-1/2" = 1'-0"	

KEYNOTES:

1. WALL CABINET, 12" DEEP CLEAR; PLASTIC LAMINATE; REFER TO FINISH PLAN FOR TYPE
2. 4" HIGH BACKSPLASH; PLASTIC LAMINATE TO MATCH COUNTERTOP
3. COUNTERTOP; PLASTIC LAMINATE; REFER TO FINISH PLAN FOR TYPE
4. BASE/UPPER CABINET; PLASTIC LAMINATE; REFER TO FINISH PLAN FOR TYPE
5. 4" TOE KICK
6. PLUMBING FIXTURE- REFER TO PLUMBING DRAWINGS FOR ADD'L INFORMATION
7. PAINTED GYP. BD.; VERIFY PAINT COLOR COORDINATE W/ OWNER'S REP.
8. FILLER PANEL; 3" MINIMUM @ WALL PERPENDICULAR SIDE
9. WALL BASE, SEE SCHEDULE
10. OF/CI APPLIANCE; REFER TO MANUFACTURER INFORMATION
11. OF/OI OFFICE EQUIPMENT; SHOWN FOR REFERENCE ONLY. PROVIDE GROMMETS @ COUNTERTOP FOR ELECTRICAL DEVICES, COORDINATE LOCATION W/OWNER'S I.T. REP.
12. TRANSACTION DRAWER; BASIS OF DESIGN: QUICKSERV, MODEL QSP-713S; INSTALL PER MANUFACTURER'S INSTRUCTIONS.
13. FIXED PANEL.

NOTES:

1. CONTRACTOR TO VERIFY FINAL CASEWORK/ MILLWORK FINISHES W/ OWNER'S REP.
2. CONTRACTOR TO VERIFY FINAL CASEWORK/ MILLWORK CONFIGURATION W/ OWNER'S REP.
3. CONTRACTOR TO VERIFY FINAL CASEWORK/ MILLWORK HARDWARE W/ OWNER'S REP.
4. ALL CASEWORK OR MILLWORK INTERIORS TO BE WHITE MELAMINE; VERIFY W/ OWNER'S REP. REFER TO SHEET A-001 FOR MOUNTING HEIGHTS & ADDITIONAL INFORMATION.



ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCRE OF FLORIDA, INC. RENOVATIONS & NEW CONSTRUCTION FOR PANCARE CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428




REVISIONS:

No.	Description	Date

INTERIOR ELEVATIONS

PROJECT NUMBER	23071
DATED	02/05/2023

A-402



-
- OVERHEAD COILING SECURITY GRILLE
- CEILING, SEE SCHEDULE
- 3/8" METAL STUD FRAMING @ 16"O.C., TYP.
- RECESSED LIGHT FIXTURE, REFER TO ELECTRICAL
- PROVIDE MANUF. TRIM @ SOFFIT OPENING
- SOFFIT, SEE SCHEDULE
- OVERHEAD COILING SECURITY GRILLE, BASIS OF DESIGN: OVERHEAD DOOR COMPANY, MODEL #670, MANUAL OPERATION, MILL FINISH, LENGTH & HEIGHT PER PLANS.
- WALL EDGE BEYOND
- COUNTERTOP: PLASTIC LAMINATE
- 2'-6"
- SUPPORT BRACKET AS REQ'D, TYP.
- 3/8" METAL TRACK
- 3/8" METAL STUD FRAMING @ 16"O.C., TYP.
- 3/8" GYP. BD., EACH SIDE
- 3/8" METAL TRACK, SECURE TO FLOOR AS REQUIRED.
- WALL BASE EACH SIDE, SEE SCHEDULE
- FINISH FLOOR, SEE SCHEDULE
- 6'-2"
- 9'-0"
- 2'-10"
- 9"

BID DOCUMENTS

PANCARE OF FLORIDA, INC.
RENOVATIONS &
NEW CONSTRUCTION
FOR PANCARE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428

[illegible]

INTERIOR ELEVATIONS



PROJECT NUMBER	23071
DATED	02/05/2023

A-403

C:\VC - Harrison\Projects\2023 Projects\23071 PanCare Clinic Chipley\B Design\B5AutoCAD\A402 Interior Elevations.dwg, A404, 2/7/2024, 4:20:00 PM, dthrogdon

© 2024 DAG ARCHITECTS, INC. ALL RIGHTS RESERVED. NO PART OF THIS DOCUMENT MAY BE COPIED, REPRODUCED OR TRANSMITTED BY ANY MEANS WITHOUT WRITTEN PERMISSION OF DAG ARCHITECTS, INC. THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY AND COPYRIGHT OF DAG ARCHITECTS, INC. AND SHALL NOT BE USED ON ANY OTHER PROJECT OR LOCATION EXCEPT AS DESCRIBED ON THE DRAWINGS, WITHOUT THE PRIOR WRITTEN AGREEMENT OF DAG ARCHITECTS.

23071
PRELIMINARY REVIEW SET
02/05/2024

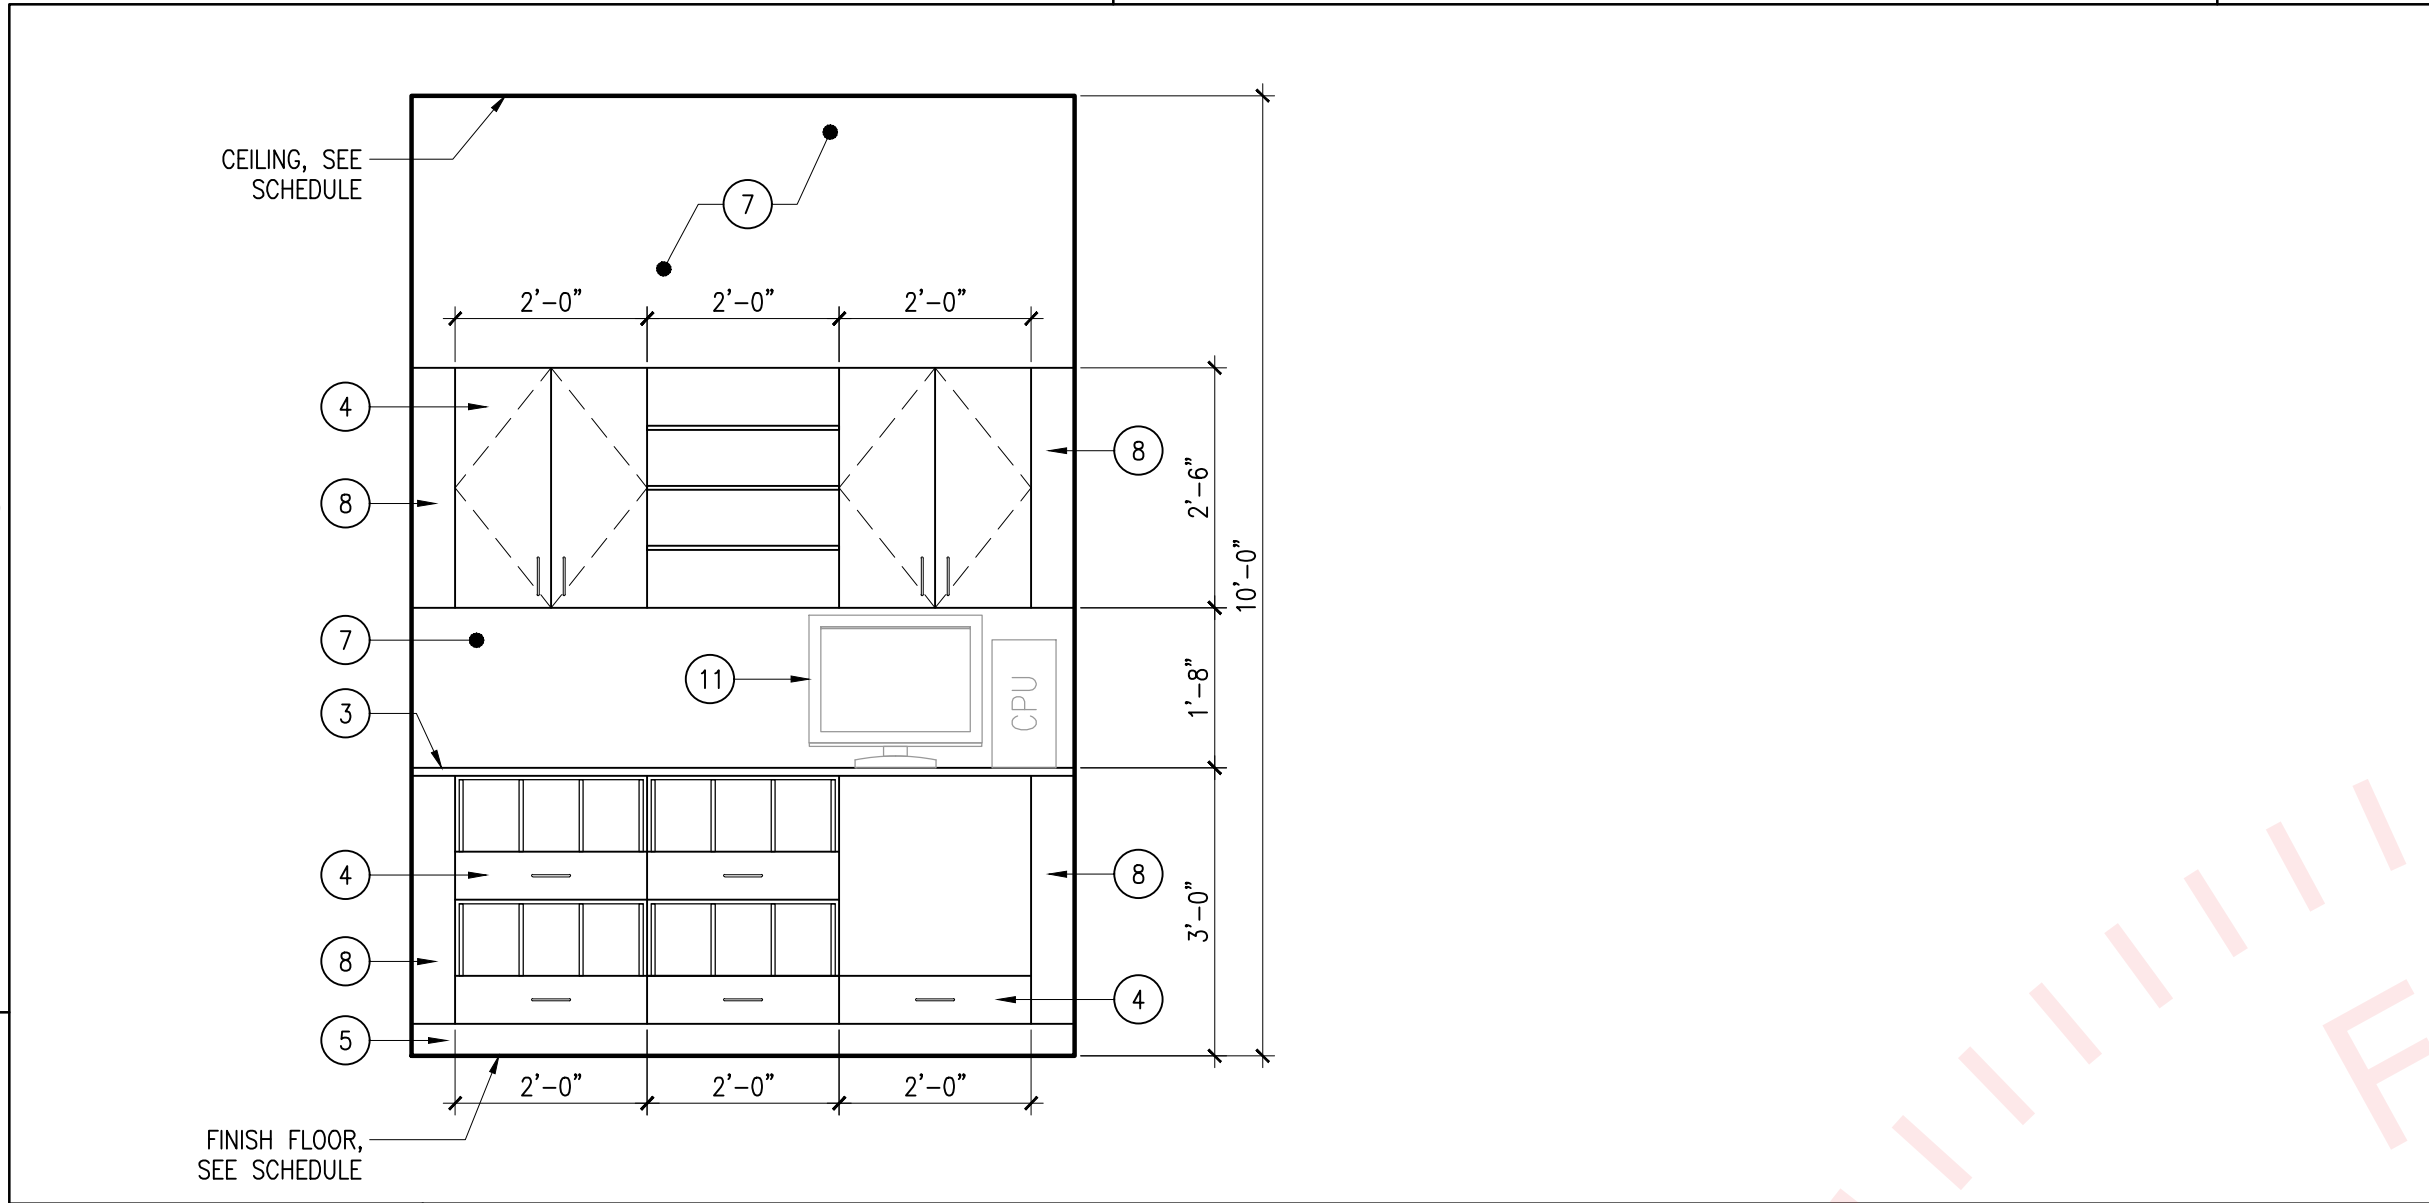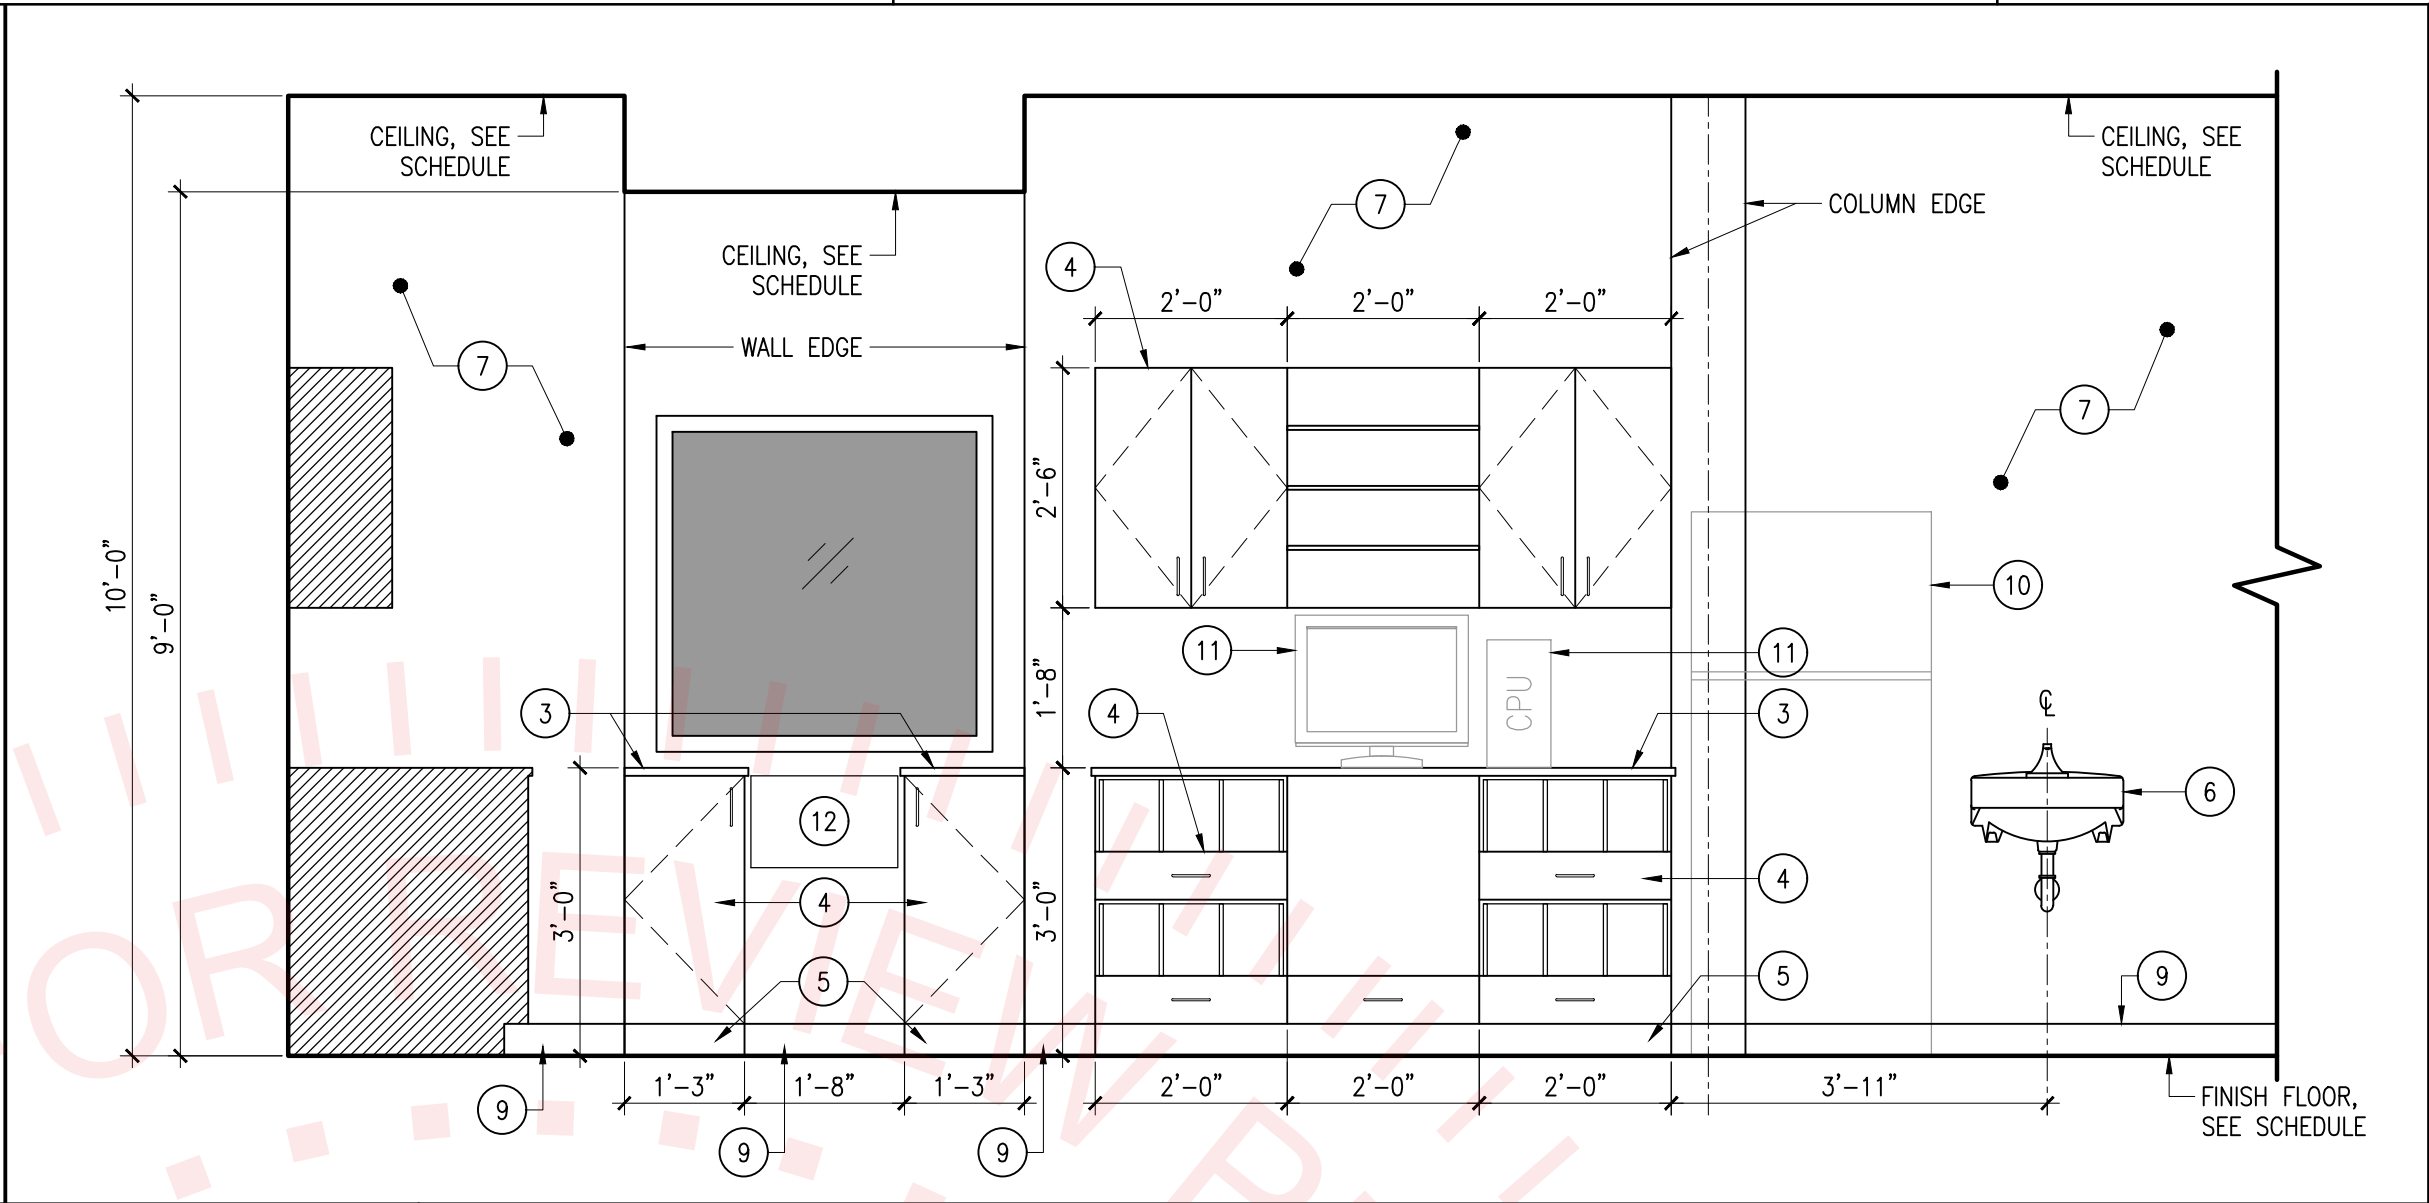				KEYNOTES: 1 WALL CABINET, 12" DEEP CLEAR; PLASTIC LAMINATE; REFER TO FINISH PLAN FOR TYPE 2 4" HIGH BACKSPLASH; PLASTIC LAMINATE TO MATCH COUNTERTOP 3 COUNTERTOP; PLASTIC LAMINATE; REFER TO FINISH PLAN FOR TYPE 4 BASE/UPPER CABINET; PLASTIC LAMINATE; REFER TO FINISH PLAN FOR TYPE 5 4" TOE KICK 6 PLUMBING FIXTURE- REFER TO PLUMBING DRAWINGS FOR ADD'L INFORMATION 7 PAINTED GYP. BD.; VERIFY PAINT COLOR COORDINATE W/ OWNER'S REP. 8 FILLER PANEL; 3" MINIMUM @ WALL PERPENDICULAR SIDE 9 WALL BASE, SEE SCHEDULE 10 OF/CI APPLIANCE; REFER TO MANUFACTURER INFORMATION 11 OF/OI OFFICE EQUIPMENT; SHOWN FOR REFERENCE ONLY. PROVIDE GROMMETS @ COUNTERTOP FOR ELECTRICAL DEVICES, COORDINATE LOCATION W/OWNER'S I.T. REP. 12 TRANSACTION DRAWER; BASIS OF DESIGN: QUICKSERV, MODEL QSP-713S; INSTALL PER MANUFACTURER'S INSTRUCTIONS. 13 FIXED PANEL.
---	--	--	--	---

NOTES:

1. CONTRACTOR TO VERIFY FINAL CASEWORK/ MILLWORK FINISHES W/ OWNER'S REP.

2. CONTRACTOR TO VERIFY FINAL CASEWORK/ MILLWORK CONFIGURATION W/ OWNER'S REP.

3. CONTRACTOR TO VERIFY FINAL CASEWORK/ MILLWORK HARDWARE W/ OWNER'S REP.

4. ALL CASEWORK OR MILLWORK INTERIORS TO BE WHITE MELAMINE; VERIFY W/ OWNER'S REP. REFER TO SHEET A-001 FOR MOUNTING HEIGHTS & ADDITIONAL INFORMATION.

DAG

ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.

RENOVATIONS &
NEW CONSTRUCTION
FOR PANCARE CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:		
No.	Description	Date

INTERIOR ELEVATIONS

PROJECT NUMBER	23071
DATED	02/05/2023



A-600

B3	ROOM FINISH SCHEDULE
SCALE: NTS	



BID DOCUMENTS

PANCARE OF FLORIDA, INC.



RENOVATIONS & NEW CONSTRUCTION FOR PANCARE CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428



ROOM FINISH SCHEDULE

A-601

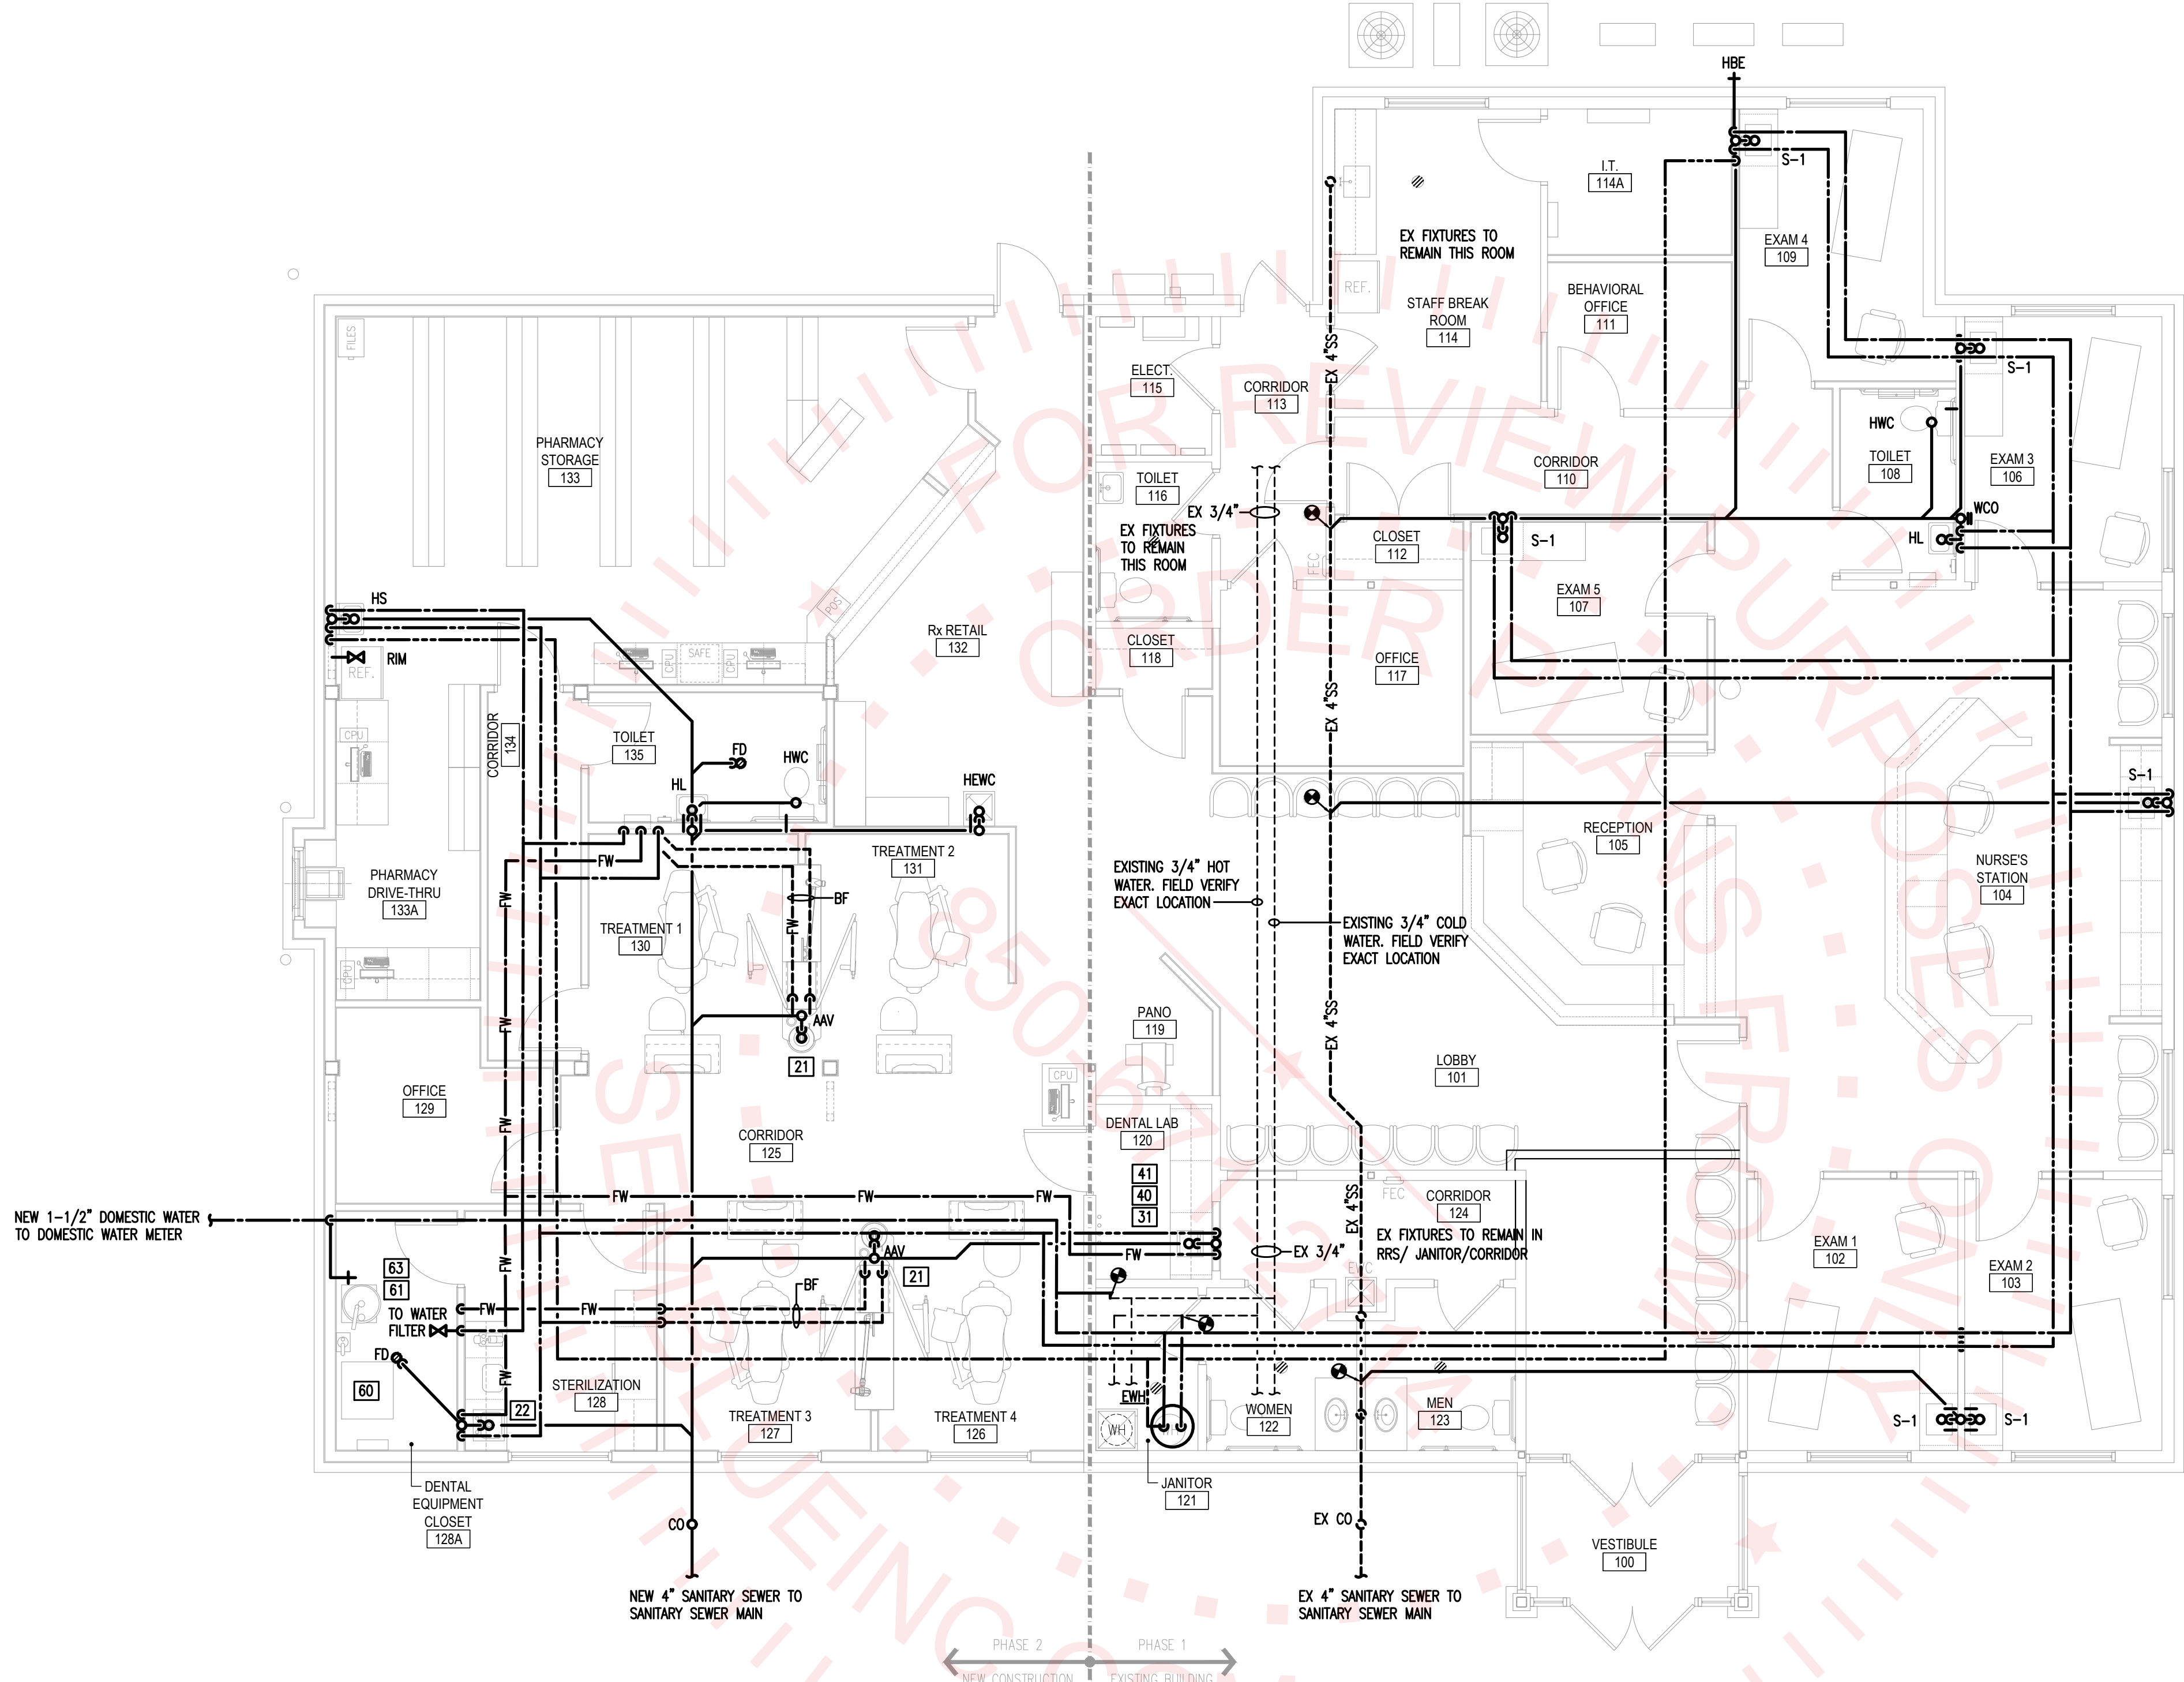

A1 DOMESTIC WATER & SANITARY WASTE PLUMBING FLOOR PLAN

SCALE: 3/16" = 1'-0"



DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS



PANCRE OF FLORIDA, INC.
RENOVATIONS &
NEW CONSTRUCTION
FOR PANCRE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:		
No.	Description	Date

DOMESTIC WATER &
SANITARY WASTE
PLUMBING FLOOR PLAN

PROJECT NUMBER 23071
DATED 02/05/2023

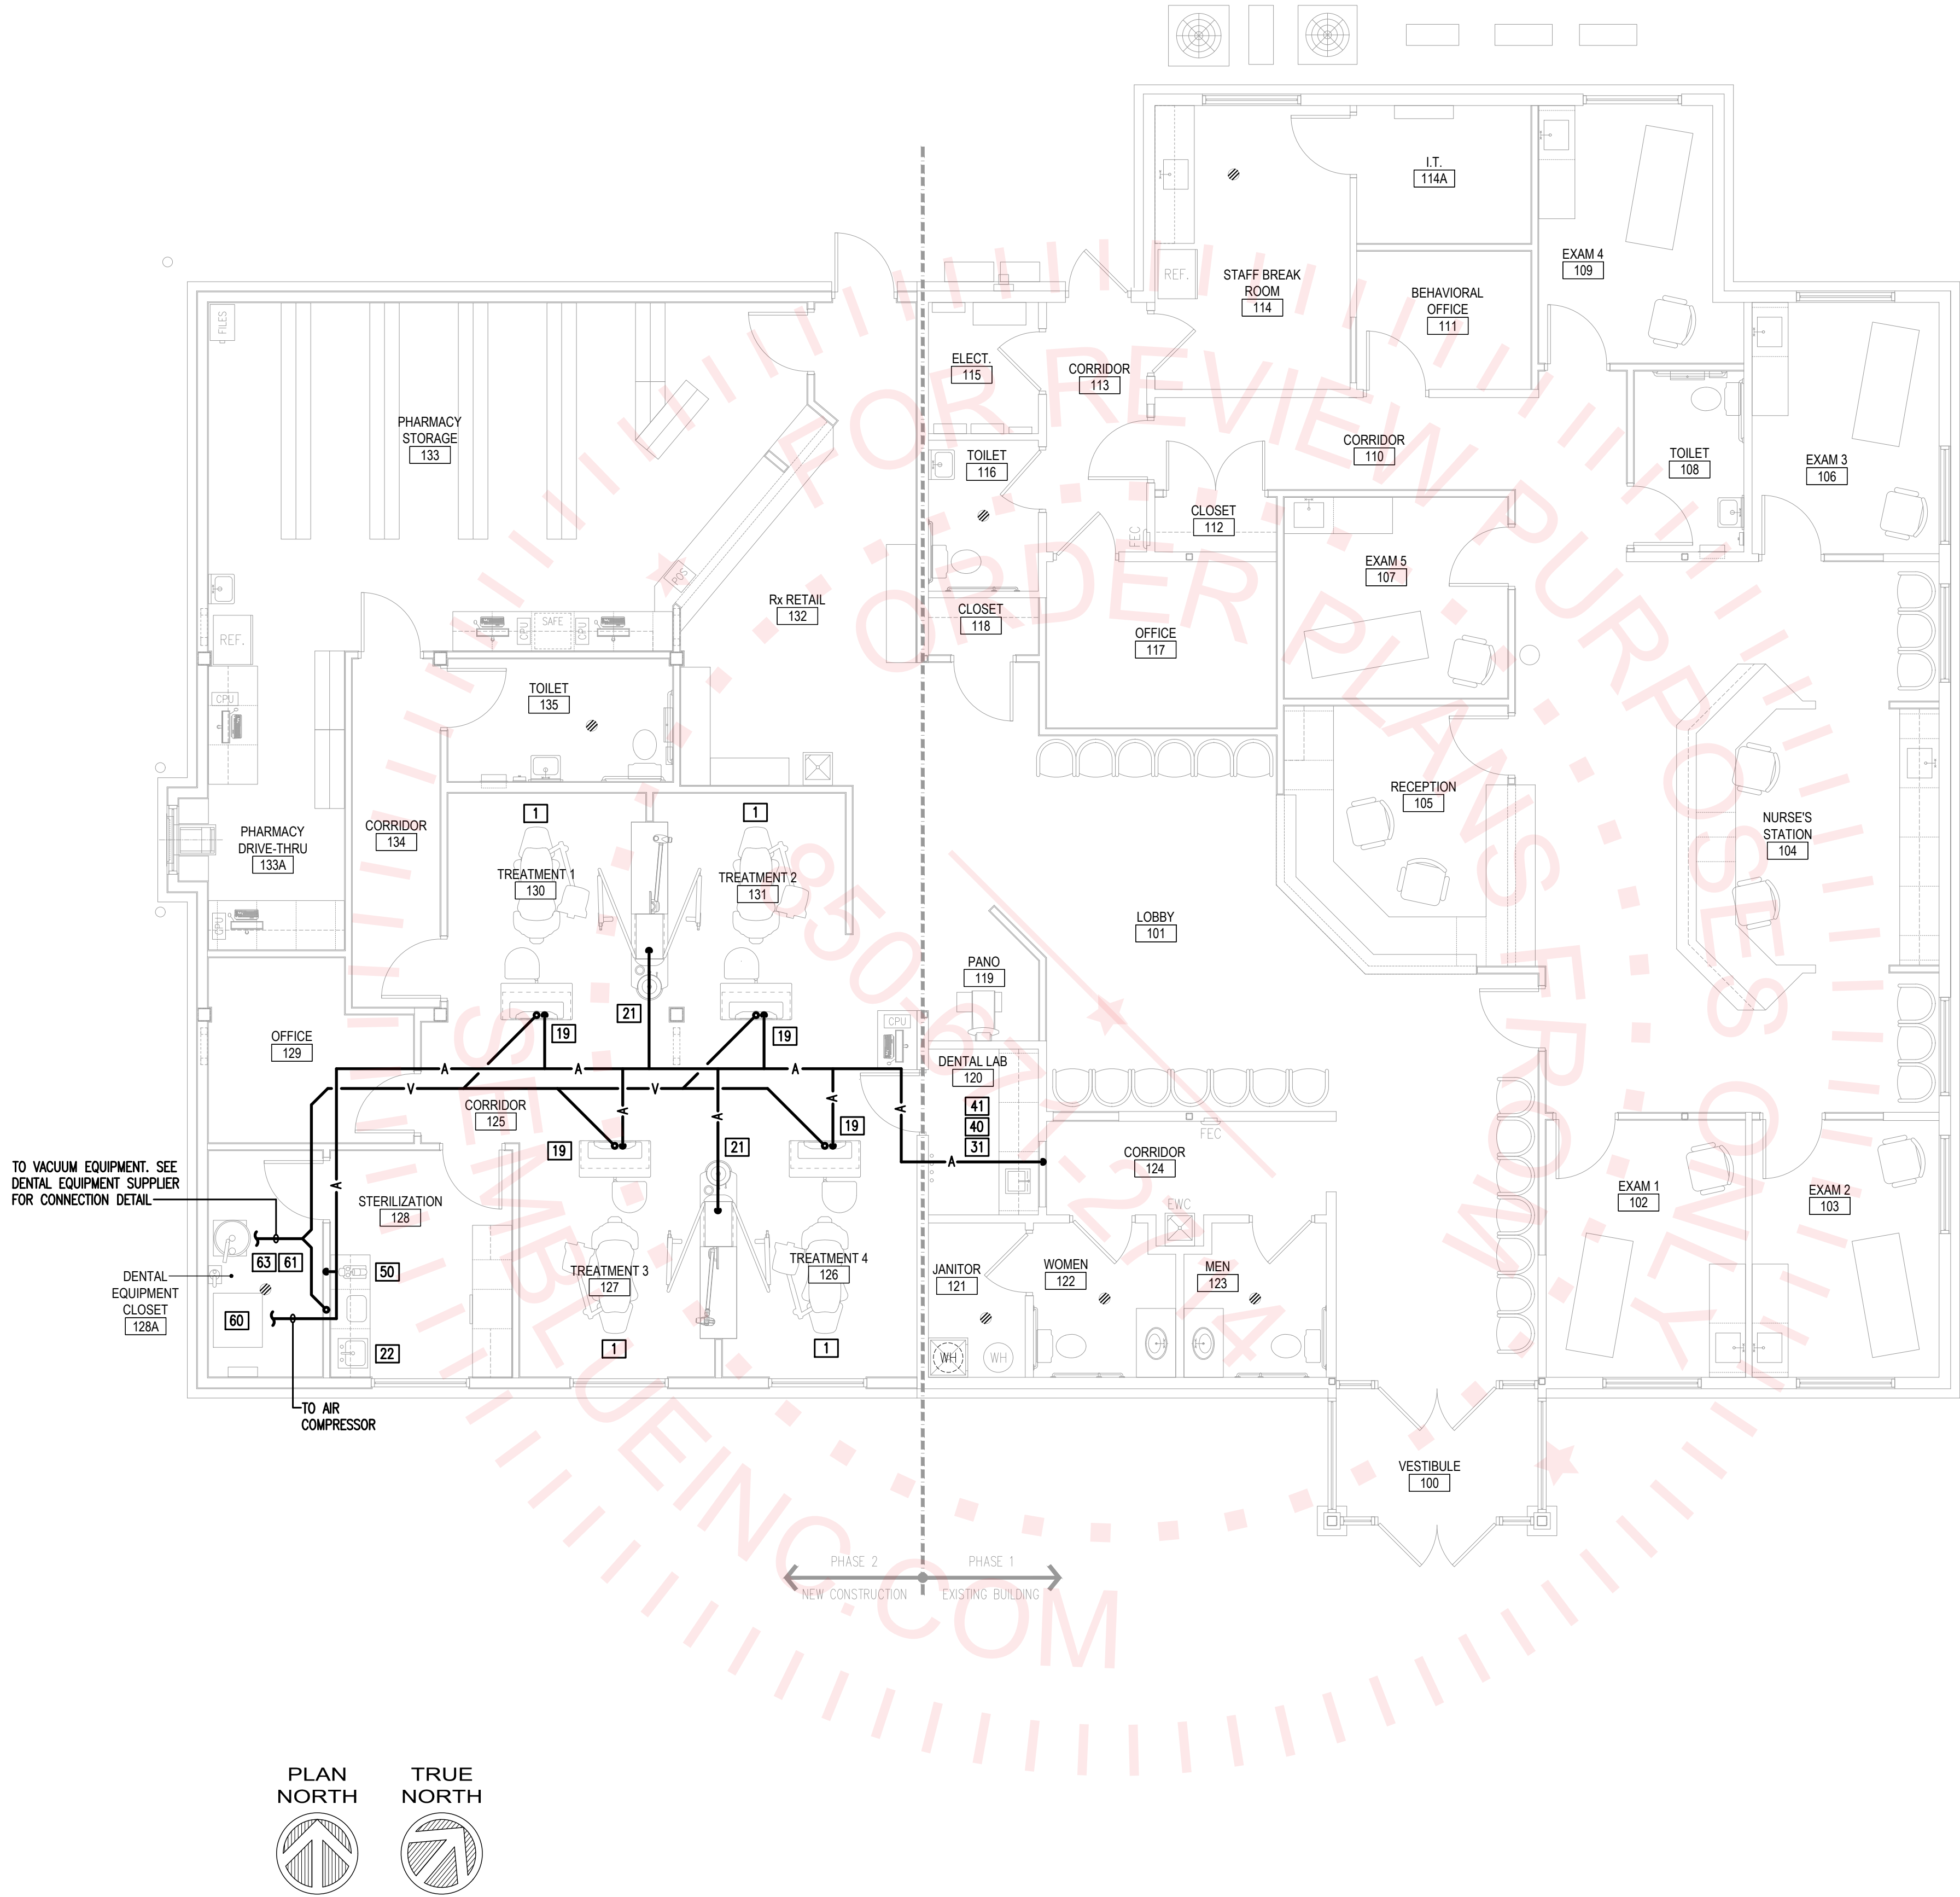

PHASE 2 PHASE 1
NEW CONSTRUCTION EXISTING BUILDING

A1

DENTAL PIPING PLAN

SCALE: 3/16" = 1'-0"



ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCRE OF FLORIDA, INC.
**RENOVATIONS &
NEW CONSTRUCTION**
FOR PANCRE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428




REVISIONS:

No.	Description	Date

DENTAL PIPING PLAN

PROJECT NUMBER	23071
DATED	02/05/2023

P102

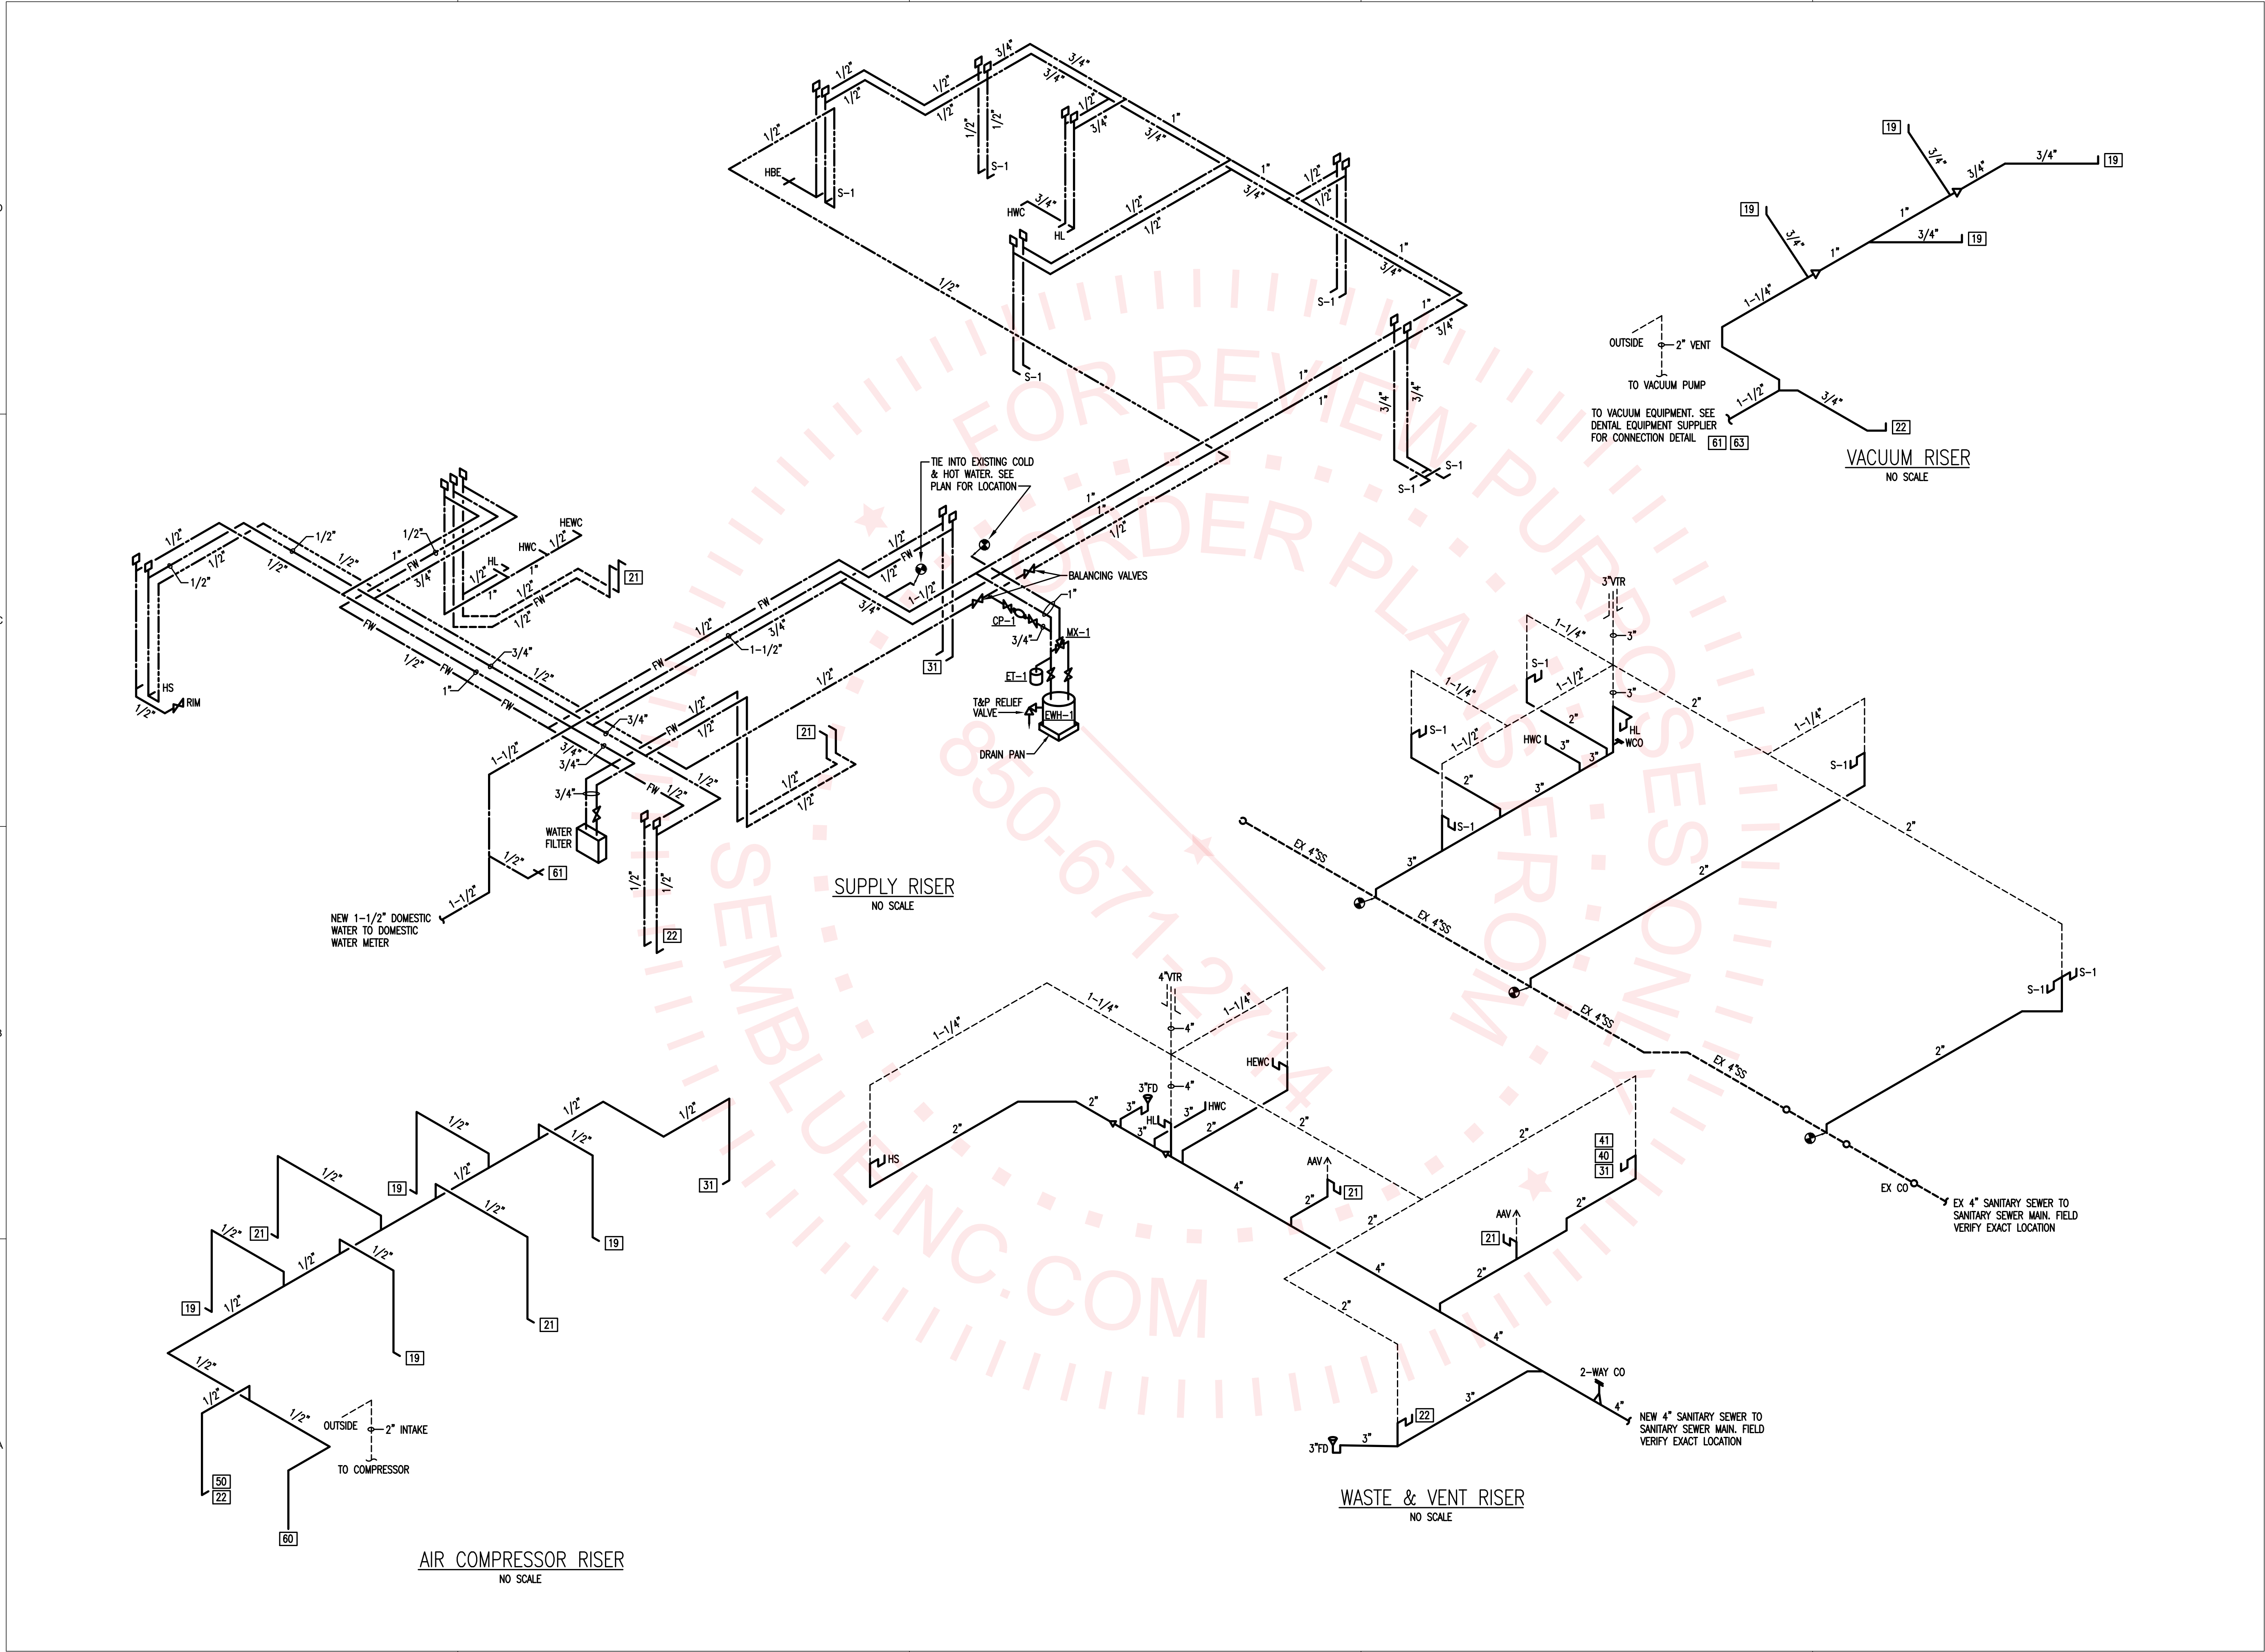

DAG

ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCRE OF FLORIDA, INC.
**RENOVATIONS &
NEW CONSTRUCTION**
FOR PANCRE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:		
No.	Description	Date







PLUMBING RISERS

PROJECT NUMBER	23071
DATED	02/05/2023

PLUMBING LEGEND	
	SOIL OR WASTE LINE
	EXISTING PIPING
	VENT
	COLD WATER (CW)
	HOT WATER (HW)
	FILTERED COLD WATER (FW)
	VACUUM
	COMPRESSED AIR
	GATE VALVE
	T & P RELIEF VALVE
	WALL CLEANOUT
	FLOOR CLEANOUT
	SHOCK ABSORBER
	VENT THRU ROOF

PLUMBING FIXTURE SCHEDULE						
MARK	FIXTURE	SANITARY	C.W.	H.W.	VACUUM	AIR
HWC	WATER CLOSET, FLOOR, TANK TYPE, ADA COMPLIANT	3"	1/2"	-	-	-
HL	LAVATORY, WALL-HUNG WITH CARRIER, ADA COMPLIANT	1 1/4"	1/2"	1/2"	-	-
HEWC	ELECTRIC WATER COOLER, ADA COMPLAINT, W/ BOTTLE FILLER	1 1/4"	1/2"	-	-	-
HS	HAND SINK	1 1/2"	1/2"	1/2"	-	-
S-1	SINGLE COMPARTMENT SINK (VERIFY REQ'S FOR LAB/PROC. AREAS)	1 1/2"	1/2"	1/2"	-	-
RIM	REFRIGERATOR ICE MAKER CONNECTION	-	1/2"	-	-	-
HBE	HOSE BIBB, EXTERIOR	-	3/4"	-	-	-
1	DENTAL CHAIR	-	-	3/4"	1/2"	-
19	REAR CABINET	-	-	3/4"	1/2"	-
21	CENTRAL CABINET	1 1/2"	1/2"	1/2"	-	1/2"
22	STERILIZATION CABINET	1 1/2"	1/2"	1/2"	3/4"	1/2"
31	LAB CABINETS	1 1/2"	1/2"	1/2"	-	1/2"
40	PLASTER TRAP	-	-	-	-	-
41	MODEL TRIMMER	SINK	-	-	-	-
50	HANDPIECE CLEANER	-	-	-	1/2"	-
60	COMPRESSOR	-	-	-	-	1/2"
61	DRY VACUUM SYSTEM	1-1/2"	1/2"	-	1 1/2"	-
EW-1	ELECTRIC WATER HEATER, 50 GALLON, 6 KW NON-SIMUL. ELEMENTS, 208V/3Ø, EQUAL TO AO SMITH DEN 40	T&P	1"	1"	-	-
MV-1	LEONARD VALVE TM-26-LF, 3/4" IN & OUT, MAX 5 PSI LOSS, MINIMUM FLOW 1.0 GPM					
ET-1	EXPANSION TANK, 2.1 GALLON, 1.48 GALLON TANK ACCEPTANCE, 150 PSI MAXIMUM PRESSURE, EQUAL TO WATTS PLT-5					
CP-1	CIRCULATION PUMP, 6 GPM, 25" HEAD, 115V, 1/6 HP, EQUAL TO BELL & GOSSETT MODEL PL-45					

- GENERAL PLUMBING NOTES**
- FURNISH ALL LABOR, MATERIALS AND EQUIPMENT NEEDED TO PROVIDE A COMPLETE PLUMBING SYSTEM. THIS INCLUDES, BUT IS NOT LIMITED TO, WATER PIPING, WASTE AND VENT PIPING, AND ALL NECESSARY VALVES, TRAPS, AND ACCESSORIES.
 - ALL WORK SHALL BE PERFORMED BY SKILLED AND EXPERIENCE WORKMEN. WORK SHALL COMPLY WITH ALL APPLICABLE STATE AND LOCAL CODES. THIS CONTRACTOR SHALL BE RESPONSIBLE FOR ALL REQUIRED PERMITS, LICENSES, AND INSPECTIONS.
 - ROUGH-INS SHALL BE MADE FROM ARCHITECTURAL DRAWINGS AND FIELD VERIFICATION, NOT FROM PLUMBING DRAWINGS AS THEY ARE ONLY SCHEMATIC. THIS CONTRACTOR SHALL VERIFY ALL UTILITY LOCATIONS AND TAPS, AND FOR CHECKING ALL ELEVATIONS, GRADES, AND INVERTS BEFORE THE START OF CONSTRUCTION. IF UNSATISFACTORY CONDITIONS EXIST, NOTIFY THE ARCHITECT IMMEDIATELY.
 - THIS CONTRACTOR SHALL COORDINATE ALL WORK WITH THE ELECTRICAL, MECHANICAL, AND FIRE PROTECTION CONTRACTORS TO AVOID CONFLICTS WITH OTHER TRADES. MAKE DEVIATIONS AS NECESSARY FROM THE WORK SHOWN ON THE DRAWINGS TO ENSURE THE WORK FITS THE SPACE(S) PROVIDED. NOTIFY THE ARCHITECT OF ALL NECESSARY DEVIATIONS.
 - IF NEW CONNECTIONS REQUIRE INTERRUPTION OF EXISTING SERVICES, ALL PREPARATORY WORK SHALL BE COMPLETED EARLY TO MINIMIZE TIME. WHERE POSSIBLE, PROVIDE TEMPORARY CONNECTIONS TO MAINTAIN UTILITY SERVICE.
 - ALL MATERIALS AND EQUIPMENT SHALL BE NEW AND WITHOUT DEFECTS. SUBMIT SHOP DRAWINGS FOR ALL EQUIPMENT AND MATERIALS. ALL WORK DONE BY THIS CONTRACTOR SHALL BE WARRANTED FOR ONE YEAR FROM THE TIME THE OWNER GIVES ACCEPTANCE OR GAINS BENEFICIAL USE, WHICHEVER IS FIRST.
 - ALL SANITARY AND VENT LINES SHALL BE HUBLESS CAST IRON PIPE CISPI 310-78 STANDARD WEIGHT WITH SPIGOT ENDS FOR COUPLING. HUBLESS CAST IRON JOINTS TO BE CISPI 310 STAINLESS STEEL SHIELD OVER ONE PIECE NEOPRENE SLEEVE. THIS CONTRACTOR MAY USE PVC PIPE AND FITTINGS CONFORMING TO ASTM D-2665 WHERE ALLOWED BY CODE.
 - ROOF PENETRATIONS SHALL BE FLASHED AND MADE WATER-TIGHT IN A MANNER APPROVED BY THE MANUFACTURER OF THE ROOFING MATERIAL AND COMPLYING WITH ARCHITECTURAL REQUIREMENTS.
 - PROVIDE CLEANOUTS WHERE INDICATED ON PLANS AND AS NECESSARY TO COMPLY WITH THE STANDARD PLUMBING CODE. ALL CLEANOUTS SHALL BE IN ACCESSIBLE LOCATIONS.
 - INSULATE ALL DOMESTIC WATER PIPING ABOVE GRADE WITH 3/4" THICK FLEXIBLE CLOSED-CELL POLYETHYLENE INSULATION. SEAL ALL JOINTS AND SEAMS AND INSULATE FITTINGS IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
 - HANGERS FOR EQUIPMENT AND PIPING SHALL BE SECURED TO THE BUILDING STRUCTURE. NO HANGERS SHALL BE ATTACHED TO THE FLOOR OR ROOF DECK MATERIAL, OR CONCRETE DECKS LESS THAN 4" THICK.
 - INSTALL SHOCK ABSORBERS VERTICALLY AT EACH FIXTURE. OFFSET AS NEEDED TO GAIN A MINIMUM HEIGHT OF 18". ALL SHOCK ABSORBERS SHALL BE A MINIMUM OF ONE PIPE SIZE LARGER THAN THE BRANCH BEING SERVED.
 - PROVIDE CHROME PLATED BRASS ESCUTCHEON PLATES AT ALL PENETRATIONS OF WALLS, FLOORS OR CEILINGS IN FINISHED AREAS AND UNDER LAVATORIES. PROVIDE STOPS AND TRAPS FOR ALL FIXTURES. LEAK TEST WATER PIPING, FOR NOT LESS THAN 90 MINUTES AT 100 PSI. FILL SANITARY SEWER SYSTEM TO A MINIMUM HEIGHT OF TEN FEET AND LET STAND FOR AT LEAST 30 MINUTES WITHOUT LEAKAGE. AFTER PRESSURE TESTS HAVE BEEN MADE, THOROUGHLY FLUSH THE ENTIRE DOMESTIC WATER SYSTEM WITH WATER UNTIL ALL ENTRAINED DIRT AND MUD HAVE BEEN REMOVED, AND STERILIZE. THE STERILIZING MATERIAL SHALL BE EITHER LIQUID CHLORINE CONFORMING TO THE FED. SPEC. BB-C-120, OR HYPOCHLORITE CONFORMING TO FED. SPEC. O-C-114, OR FED. SPEC. O-S-602M. THE CHLORINATING AGENT SHALL PROVIDE A MINIMUM DOSAGE OF 50 PPM AND SHALL BE RETAINED IN THE SYSTEM FOR 90 MIN. THE SYSTEM WILL THEN BE FLUSHED WITH CLEAN POTABLE WATER UNTIL THE RESIDUAL CHLORINE IS REDUCED TO LESS THAN 1.0 PPM. HAVE THREE STATE-APPROVED INDEPENDENT TESTING FACILITIES TAKE SAMPLES AND DELIVER CERTIFICATES OF APPROVAL TO THE OWNER. ANY NEGATIVE RESULTS MUST BE INVESTIGATED, AND IF NECESSARY CORRECTED, BEFORE THE BUILDING MAY BE ACCEPTED.

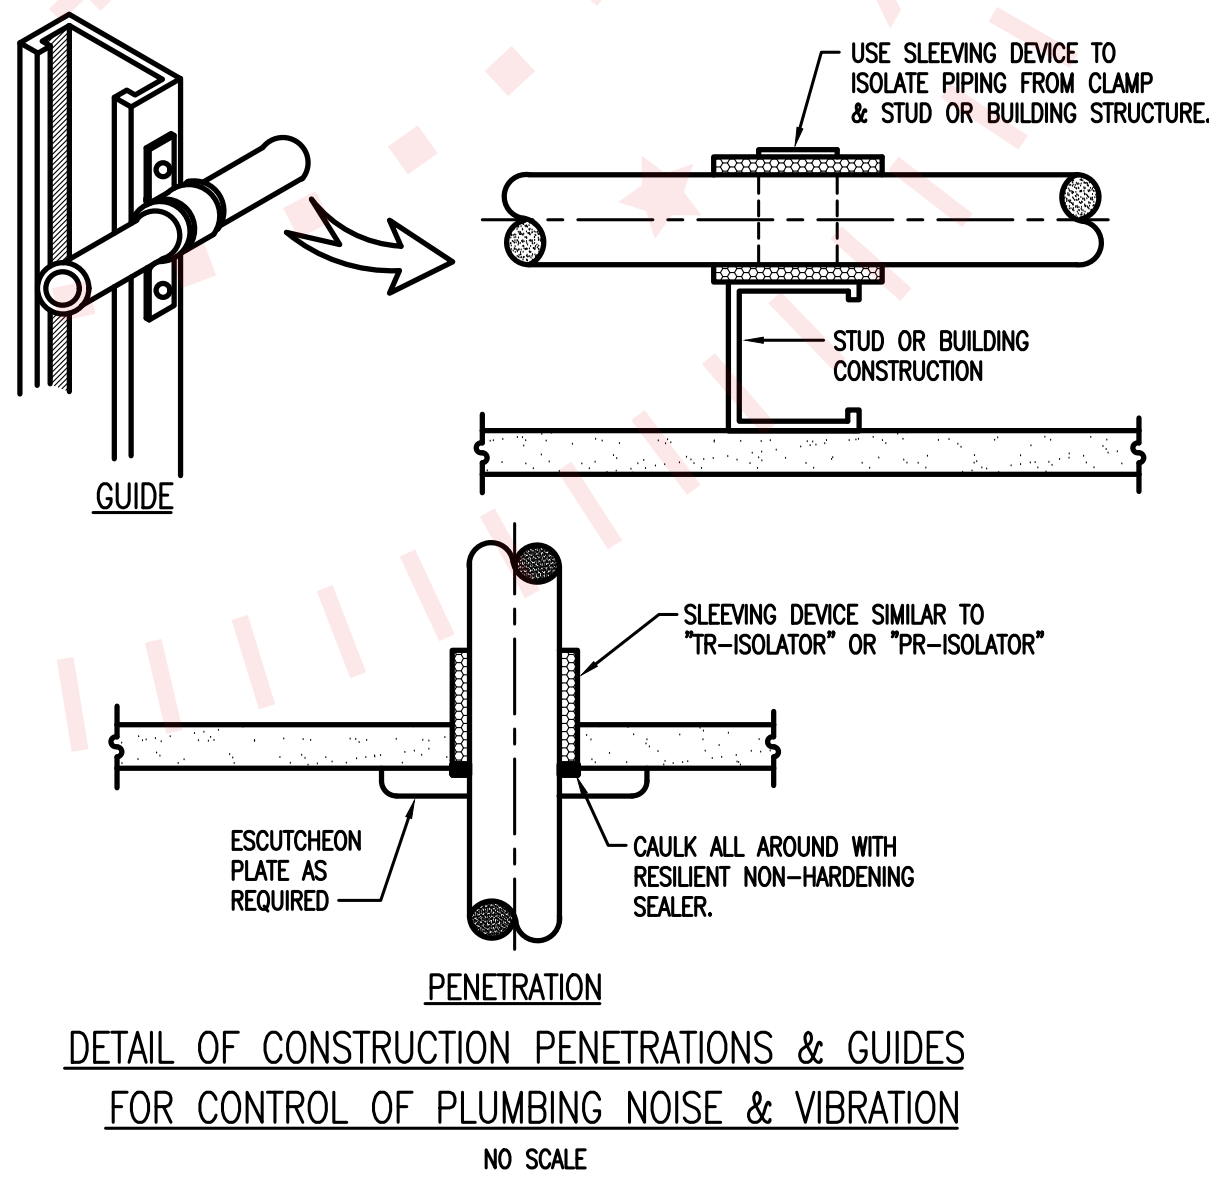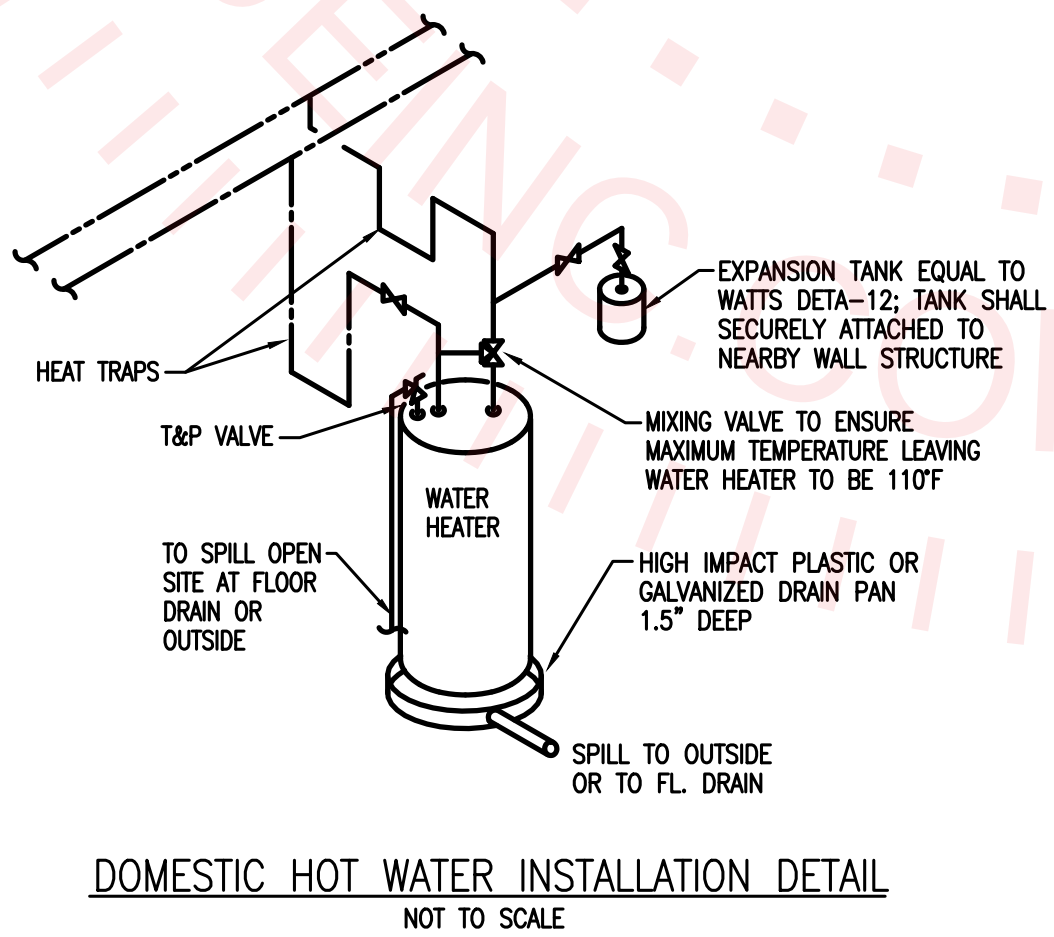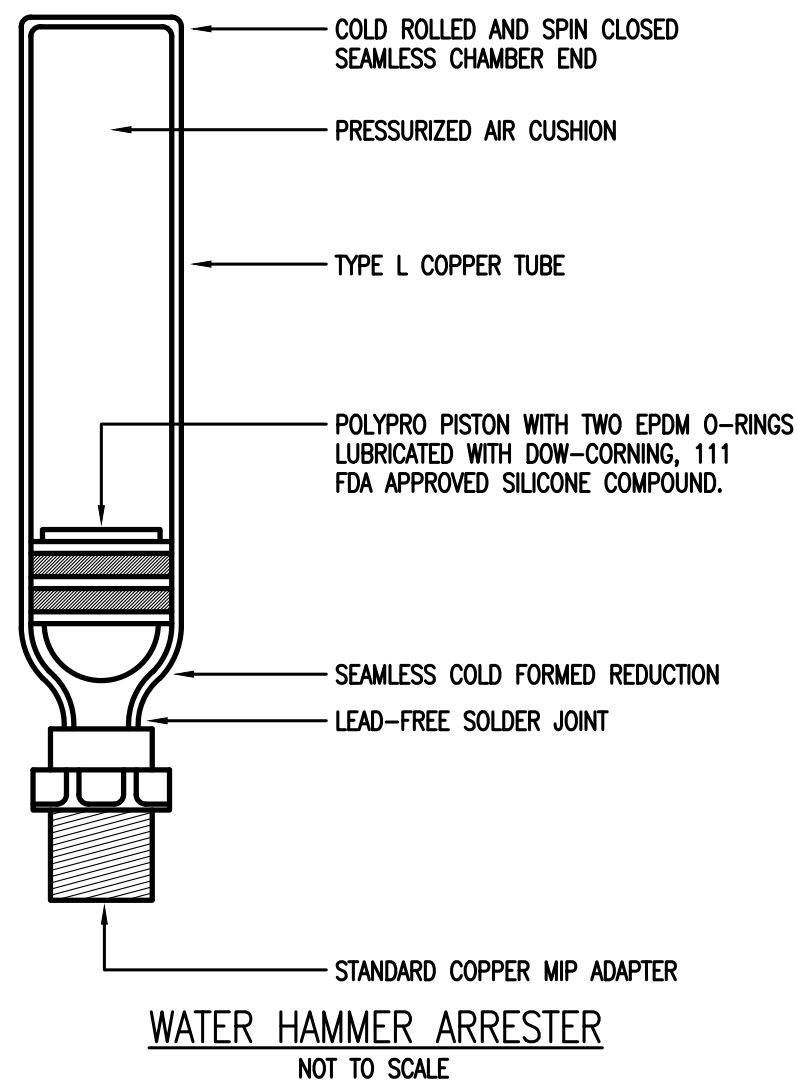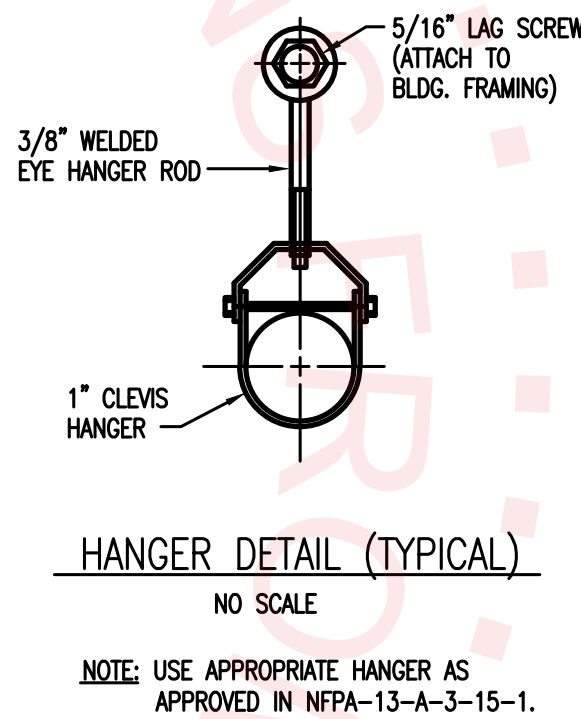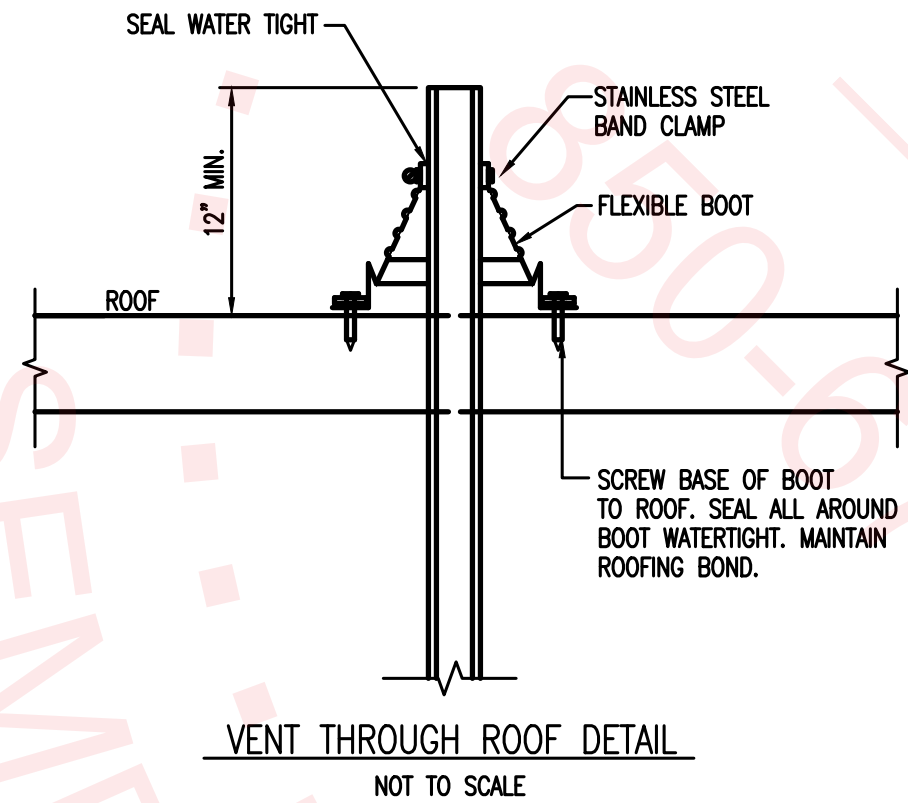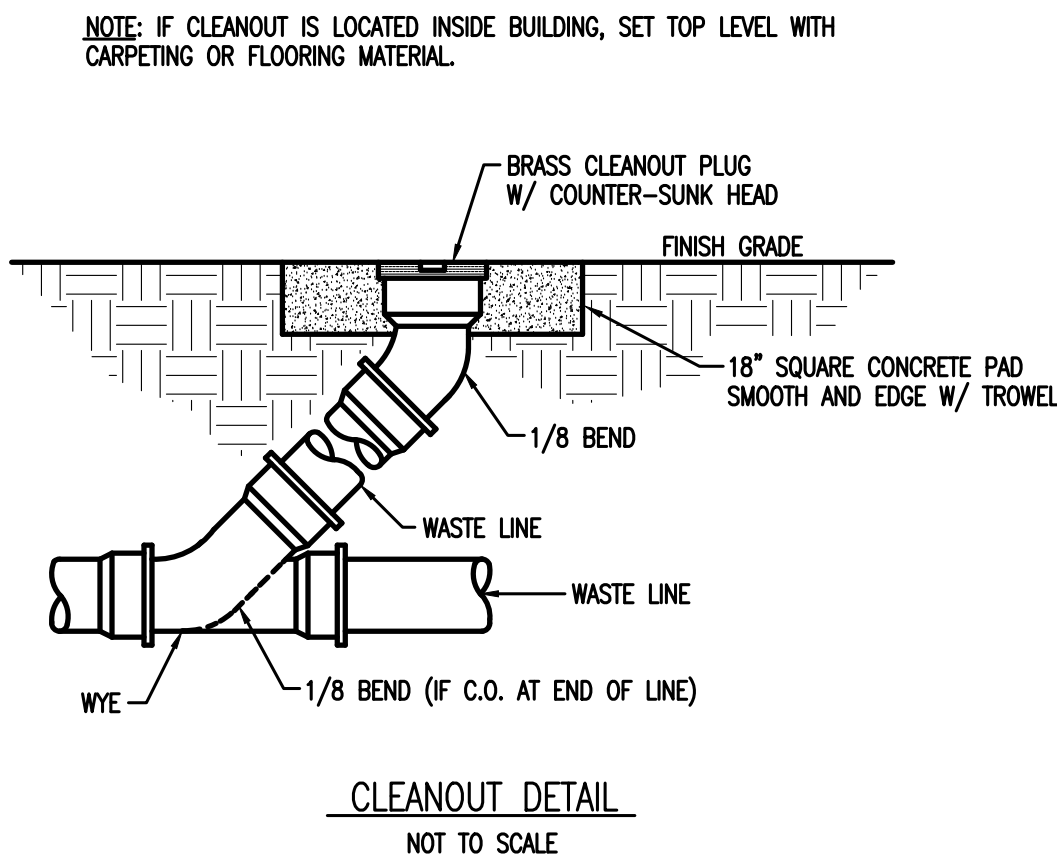

DAG

ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS


PANCARE OF FLORIDA, INC.
**RENOVATIONS &
NEW CONSTRUCTION**
FOR PANCARE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428

PanCare
OF FLORIDA, INC.

REVISIONS:		
No.	Description	Date

**PLUMBING NOTES,
LEGEND, SCHEDULE,
& DETAILS**



PROJECT NUMBER **23071**
DATED 02/05/2023



SCALE: 3/16" = 1'-0"

JPE Job Number: 2353

M101

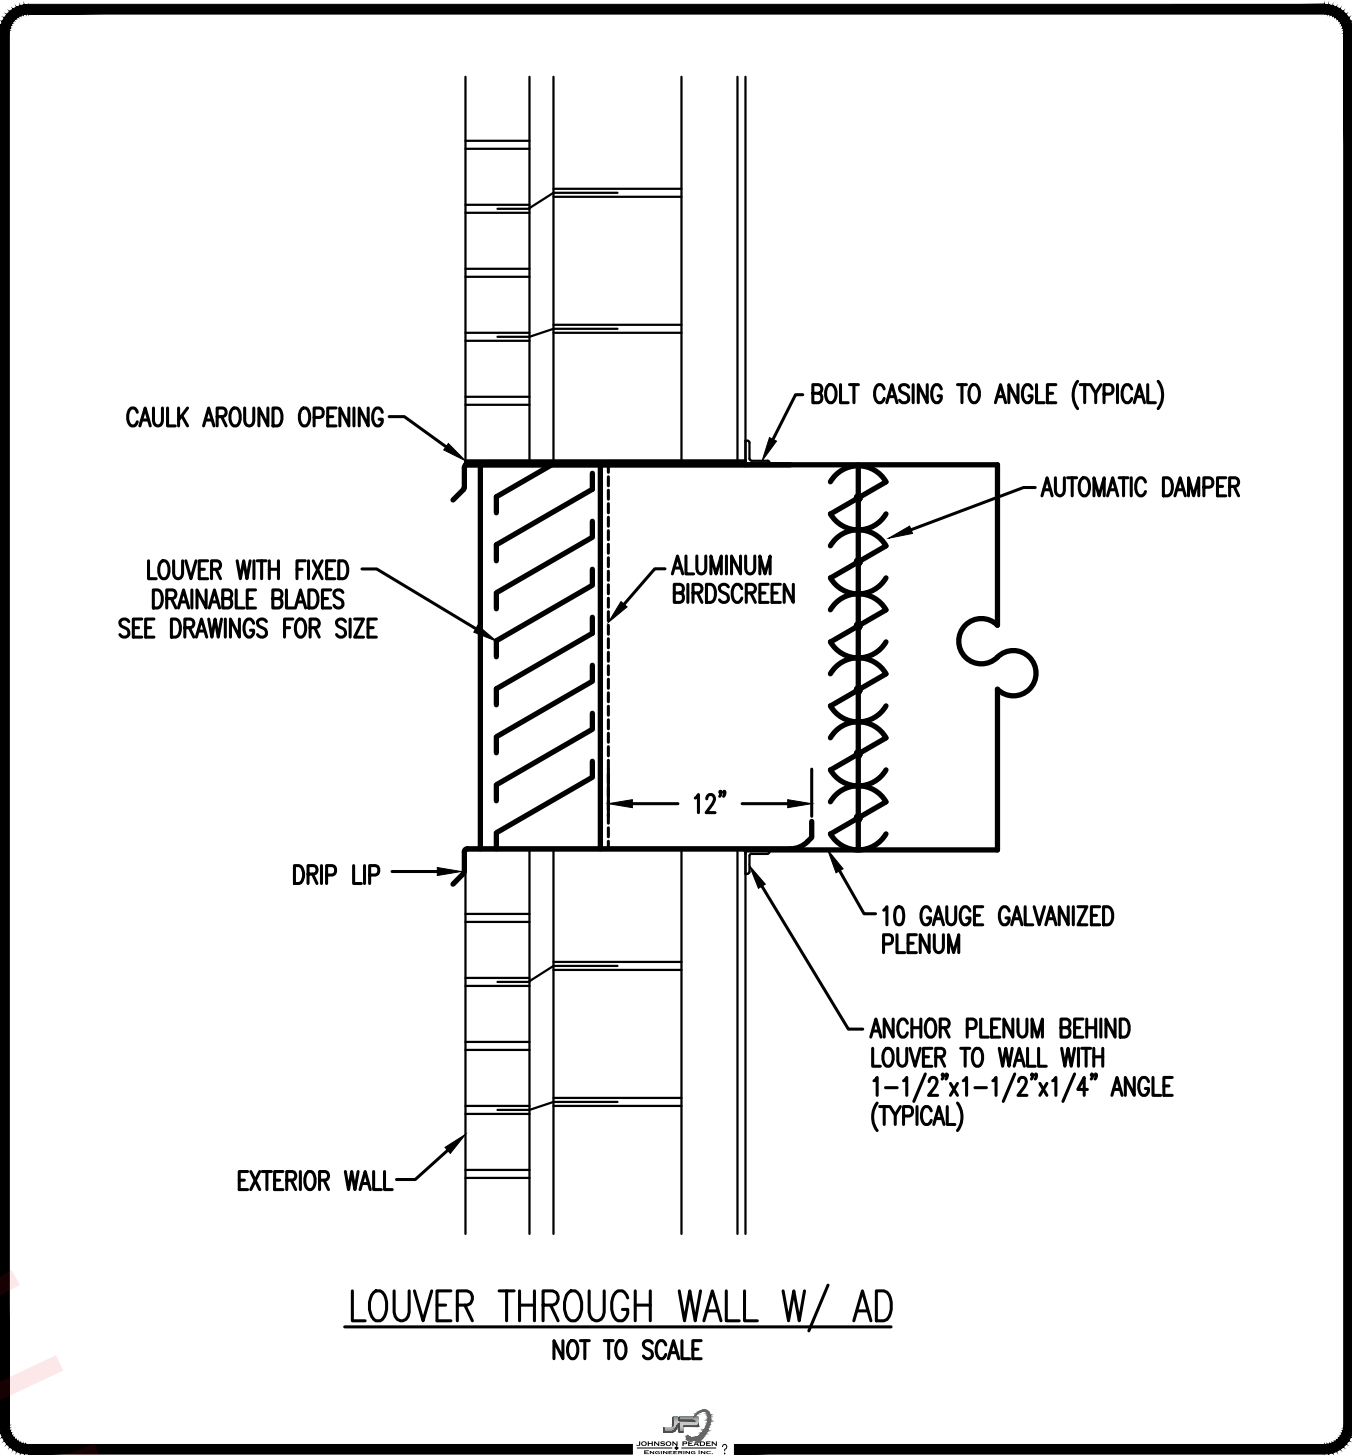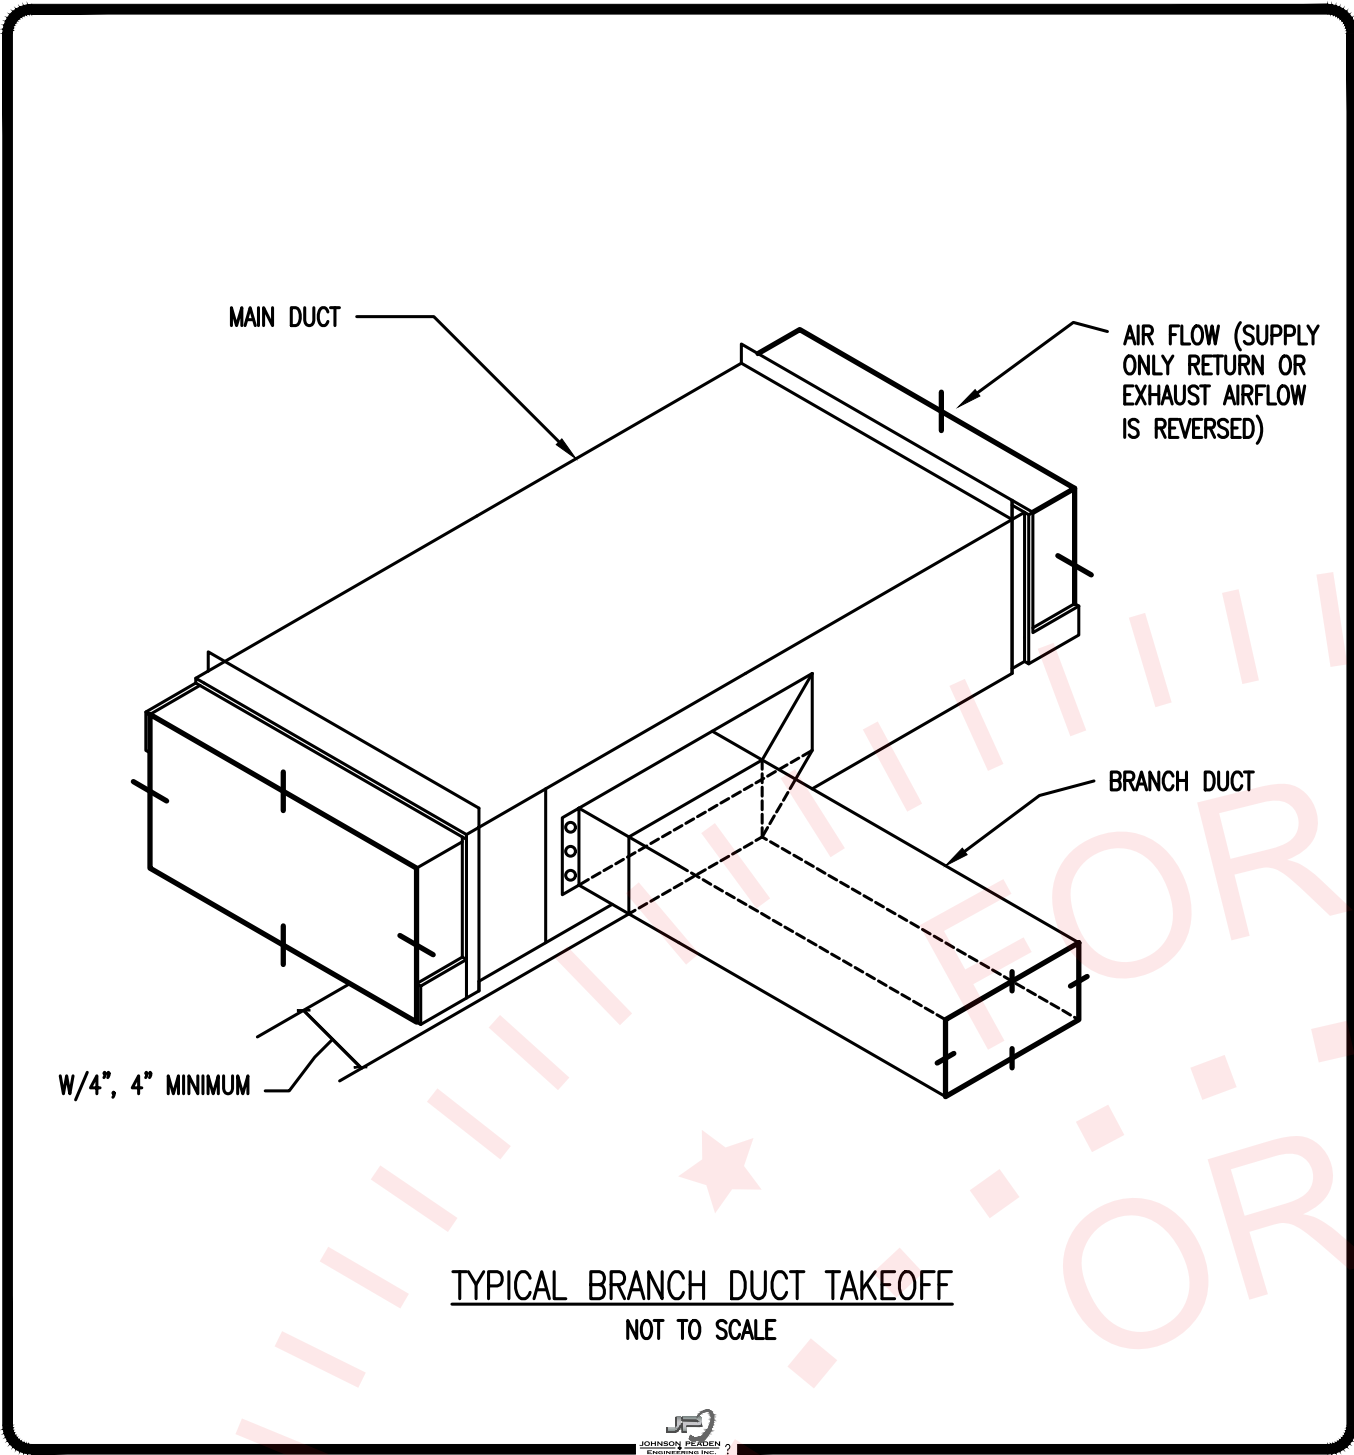

GENERAL MECHANICAL NOTES

1. FURNISH ALL LABOR, EQUIPMENT, AND MATERIALS TO PROVIDE A COMPLETE MECHANICAL SYSTEM. DUE TO THE SCHEMATIC NATURE OF THESE PLANS, THE CONTRACTOR SHALL FIELD-VERIFY LOCATIONS FOR EQUIPMENT DUCTWORK AND ACCESSORIES. IN ADDITION, THIS WORK SHALL BE COORDINATED WITH OTHER TRADES TO AVOID CONFLICTS. THE CONTRACTOR SHALL ALSO REVIEW THE STRUCTURAL DRAWINGS BEFORE FABRICATING AND INSTALLING DUCTWORK OR EQUIPMENT.
2. ALL WORK SHALL BE PERFORMED BY SKILLED AND EXPERIENCED WORKMEN. WORK SHALL COMPLY WITH ALL APPLICABLE STATE AND LOCAL CODES. THIS CONTRACTOR SHALL BE RESPONSIBLE FOR ALL REQUIRED PERMITS, LICENSES, AND INSPECTIONS.
3. ALL MATERIALS SHALL BE NEW AND WITHOUT DEFECTS. SUBMIT SHOP DRAWINGS FOR ALL MATERIALS AND EQUIPMENT. ALL WORK DONE BY THIS CONTRACTOR SHALL BE WARRANTED FOR ONE YEAR FROM THE TIME THE OWNER ACCEPTS THE SAME. BIDDING USE, WHICHEVER IS FIRST. ALL EQUIPMENT SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS.
4. DUCT SIZES ON DRAWINGS ARE INSIDE CLEAR DIMENSIONS. DUCT SHALL BE OF LOW-PRESSURE (2.0" w.g.) CONSTRUCTION AS CLASSIFIED BY SMACNA UNLESS OTHERWISE NOTED. ALL DUCT SHALL HAVE MINIMUM 2" EXTERNAL WRAP (MINIMUM R-6.0). LINER MAY ONLY BE USED WHERE REQUIRED FOR SOUND ATTENUATION. DUCTBOARD SHALL NOT BE USED.
5. FLEXIBLE DUCT MAY BE INSTALLED ONLY WHERE SHOWN ON THE DRAWINGS. DUCT SHALL BE EXTERNALLY-INSULATED CORRUGATED METAL WITH A MAXIMUM LENGTH OF 6'-0". FOR TAKE-OFFS LONGER THAN 6'-0", THE REMAINDER OF THE DISTANCE SHALL BE EXTERNALLY-WRAPPED SINGLE-WALL ROUNDED DUCT WITH A SPIN-IN STYLE JAT AT THE MAIN DUCT.
6. HANGERS FOR EQUIPMENT AND PIPING SHALL BE SECURED TO THE BUILDING STRUCTURE. NO HANGERS SHALL BE ATTACHED TO THE FLOOR OR ROOF DECK MATERIAL, OR CONCRETE DECKS LESS THAN 4" THICK.
7. ALL RETURN AND EXHAUST GRILLES SHALL HAVE OPPOSED-BLADE DAMPERS. ALL SUPPLY-SIDE TAKE-OFFS SHALL HAVE A BALANCING DAMPER.
8. FIRE DAMPERS AND FIRE-STOPPING SHALL BE PROVIDED FOR ANY PENETRATIONS OF FIRE-RATED PARTITIONS. VERIFY LOCATIONS OF ALL FIRE-STOPPING ON THE ARCHITECTURAL DRAWINGS.
9. SUPPLY GRILLES REGISTERED TO BE EQUAL TO STATUS WITH ALUMINUM CONSTRUCTION. SUPPLY GRILLES SHALL BE EQUAL TO MODEL TDC. SUPPLY REGISTERS SHALL BE EQUAL TO MODEL 301. RETURN, EXHAUST AND TRANSFER GRILLES SHALL BE EQUAL TO MODEL 355 WITH OPPOSED-BLADE DAMPERS. GRILLE FINISH SHALL BE APPROVED BY THE OWNER AND THE ARCHITECT.
10. EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE ABLE TO PROVIDE THE REQUIRED CAPACITIES IN THE MIDDLE OF ITS PERFORMANCE RANGE. ALL COMPRESSORS SHALL HAVE A MINIMUM 5-YEAR WARRANTY UNLESS OTHERWISE NOTED. THE EQUIPMENT SHALL HAVE ALL THE NECESSARY CONTROLS AND ACCESSORIES TO ALLOW FOR FULL OPERATION. EQUIPMENT HAS COMPONENTS OF A VIBRATIVE NATURE, THE CONTRACTOR SHALL PROVIDE THE NECESSARY VIBRATION CONTROLS.
11. REFRIGERANT PIPING SHALL BE HARD-DRAWN TYPE K OR L COPPER WITH COPPER SOLDER FITTINGS. PIPING SHALL BE SOLDERED WITH SILVER SOLDER AND INSULATED WITH 1/2" THICK THERMAL TUBULAR JACKETING. SEAL INSULATION JOINTS WITH TAPE AND CEMENT OR PER MANUFACTURER'S INSTRUCTIONS. PRE-INSULATED AND PRE-CHARGED REFRIGERANT LINES MAY BE USED AS PROVIDED BY THE EQUIPMENT MANUFACTURER. WHERE INSULATION IS EXPOSED TO WEATHER PROTECT LINES WITH AN ALUMINUM COVER AND PAINT TO MATCH EXTERIOR FINISH.
12. CONDENSATE DRAINS SHALL BE FULL-SIZE (3/4" MINIMUM) COPPER OR SCHEDULE 40 PVC. DRAINS SHALL BE INSTALLED IN THE SAME MANNER AS REFRIGERANT LINES. DISCHARGE AS SHOWN ON THE DRAWINGS.
13. CONTROLS SHALL BE EQUAL TO MANUFACTURER'S CONTROLS. OUTDOOR UNITS SHALL HAVE FACTORY-WIRED TIME DELAYS, PRESSURE SWITCHES, LOW-AMBIENT CONTROLS AND DEFROST CONTROLS. THERMOSTATS SHALL BE DIGITAL AND PROGRAMMABLE WITH BATTERY BACK-UP. SETPOINTS SHALL FOLLOW DESIGN CONDITIONS OR BE AS DIRECTED BY THE OWNER. MOUNT ALL THERMOSTATS AND TEMPERATURE SENSORS 60" A.F.F.
14. THE HVAC SYSTEM SHALL BE TESTED AND BALANCED ACCORDING TO AABC STANDARDS. THE CONTRACTOR SHALL PROVIDE THE ARCHITECT WITH A COPY OF THE TEST AND BALANCE REPORT AND THE OWNER WITH A LETTER STATING THAT THE SYSTEM(S) HAVE BEEN BALANCED TO WITHIN 10% OF DESIGN PARAMETERS.

HEAT PUMP CONDENSING UNIT SCHEDULE														
UNIT NO.	TOTAL COOLING (MBH)	SENSIBLE COOLING (MBH)	LATENT COOLING (MBH)	SEER2	OUTDOOR TEMP-COOLING (°FDB/°FWB)	HEAT PUMP HEATING CAP (MBH)	COP	HSPF2	FLA	MCA	MOCp	VOLT/PHASE	MAKE/MODEL NUMBER	REMARKS
ODHP-1	46.4	33.3	13.1	16.0	95.0°FDB/77.0°FWB	34.292	4.00	8.10	22.2	28.0	45	208-230/3	TRANE 4TWR6048	1, 2
ODHP-3	54.2	40.2	14.0	15.6	95.0°FDB/77.0°FWB	39.926	3.80	7.80	28.2	35.0	60	208-230/3	TRANE 4TWR6060	1, 2
REMARKS														
1. UNIT SHALL HAVE: ANTI-SHORT-CYCLE TIMER, TXV VALVE, LOW AMBIENT COOLING, EVAPORATOR DEFROST, SEACOAST PROTECTION.														
2. COMPRESSOR SHALL HAVE MINIMUM TWO-STAGE CAPACITY.														

VENTILATION FAN SCHEDULE										
MARK	CFM	S.P. "W.G.	MIN. POWER	MAX. RPM	MAX. SONES	FAN TYPE	DRIVE TYPE	EQUAL TO MODEL NUMBER	CONTROL OR INTERLOCK	NOTES
EF-A-B	100	0.25	81 W	973	2.4	CENTR.	DIRECT	GREENHECK SP-110	LIGHT SWITCH	1, 2
1. ALL FANS SHALL BE COMPLETE WITH BACKDRAFT DAMPERS, DISCONNECT, FILTER, WHITE ALUMINUM GRILLE, ISOLATOR KIT. 2. FAN SPEED CONTROL.										

 JOHNSON PEADEN ENGINEERING, INC.	221 Hollywood Blvd NE Ft Walton Beach, FL 32548 850.244.6189V	1399-M Jenks Ave Panama City, FL 32401 850.215.4068V
	Alabama #CD-2429-E	Mississippi #00000862
	Arkansas #1654	Missouri #2018035834
	Florida #00009014	South Carolina #7058
	Georgia #PEF003983	Tennessee #7417
Louisiana #EF0006882	Texas #-16637	

These plans, the ideas and the concepts contained herein including any digital information are the sole property of Johnson, Peaden Engineering, Inc. They are not to be reproduced, copied, modified or changed without the expressed written permission of Johnson, Peaden Engineering, Inc.

JPE Job Number: 2353





M202

JPE Job Number: 2353

ELECTRICAL GENERAL NOTES


1. CONTRACTOR SHALL COORDINATE ALL WORK WITH OTHER TRADES PRIOR TO INSTALLATION. REFER TO MECHANICAL AND PLUMBING DRAWINGS FOR EXACT SIZE AND LOCATION OF EQUIPMENT WHICH IS FURNISHED BY OTHERS AND CONNECTED BY ELECTRICAL.
2. RECEPTACLES, SWITCHES AND COVERPLATES COLOR SHALL BE SELECTED BY THE ARCH/OWNER FROM STANDARD COLORS.
3. LOCATION OF LIGHTING FIXTURES, DISCONNECT SWITCHES, ETC. FOR MECHANICAL EQUIPMENT/ROOM SHALL BE COORDINATED WITH FINAL MECHANICAL EQUIPMENT LOCATION TO PROVIDE NATIONAL ELECTRIC CODE REQUIRED ACCESS SPACE.
4. FINAL CONNECTION TO ALL MOTORS SHALL BE WITH FLEXIBLE CONDUIT CONNECTION.
5. ALL EXIT AND EMERGENCY FIXTURES SHALL BE CONNECTED TO LIGHT CIRCUIT AHEAD OF LOCAL SWITCH.
6. ALL PANELBOARDS, BACKBOARDS, TERMINAL CABINETS, ETC SHALL HAVE CUSTOM ENGRAVED MICARTA NAMEPLATE AFFIXED IDENTIFYING SYSTEM.
7. GENERAL CONTRACTOR SHALL FIELD-VERIFY ALL EXISTING CONDITIONS PRIOR TO BEGINNING ANY WORK, AND SHALL IMMEDIATELY NOTIFY THE ARCHITECT OF ANY DISCREPANCIES. FAILURE TO DO SO INDICATES THAT THE CONTRACTOR ACCEPTS THE CONDITIONS AS THEY EXIST, AND SHALL PERFORM THE WORK REQUIRED AS SHOWN AND SPECIFIED.
8. THE ELECTRICAL CONTRACTOR SHALL OBTAIN AND REVIEW THE MECHANICAL AND SPECIAL EQUIPMENT SUBMITTALS PRIOR TO SUBMITTING THE ELECTRICAL SUBMITTALS. ALL ELECTRICAL EQUIPMENT, CONDUIT, AND WIRE SIZE CHANGES RESULTING FROM THIS REVIEW SHALL ALSO BE SUBMITTED FOR APPROVAL.
9. COMPLY WITH ALL LOCAL CODE, LAWS, AND ORDINANCES APPLICABLE TO ELECTRICAL WORK, THE STATE BUILDING CODE AND THE NATIONAL ELECTRIC CODE. OBTAIN ALL PERMITS REQUIRED BY LOCAL ORDINANCES.
10. EQUIPMENT GROUNDING CONDUCTOR SHALL BE PULLED IN ALL BRANCH CIRCUIT WIRING. CONDUIT GROUND SHALL NOT BE ACCEPTABLE.
11. FURNISH ALL EQUIPMENT AND LABOR, PERFORM ALL LABOR WITH SUPERVISION, BEAR ALL EXPENSES, AS NECESSARY FOR THE SATISFACTORY COMPLETION OF ALL WORK READY FOR OPERATION.
12. THE ELECTRICAL WORK SHALL BE INSTALLED IN A NEAT AND WORKMANLIKE MANNER. ALL NOT SO INSTALLED SHALL BE REMOVED AND REPLACED AT NO COST TO THE OWNER.
13. ALL CONDUCTORS LESS THAN 60A. SHALL BE COPPER #12 & #10 SOLID, #8 AND LARGER STRANDED, #6 AND SMALLER TO BE TYPE TW, 600 VOLT INSULATION. ALUM. CONDUCTORS MAY BE USED FOR 60A AND LARGER ONLY WHERE USED WITH COMPRESSION TERMINATIONS. TYPE NM CABLE MAY NOT BE USED ON THIS PROJECT.
14. PROVIDE GROUNDING PER NATIONAL ELECTRIC CODE.
15. THE CONTRACTOR SHALL LEAVE THE ENTIRE ELECTRICAL SYSTEM INSTALLED IN PROPER WORKING ORDER, AND SHALL REPLACE WITHOUT ADDITIONAL COST, ALL WORK OR MATERIAL WHICH MAY DEVELOP DEFECTS, (ORDINARY WEAR AND TEAR OR DAMAGE RESULTING FROM IMPROPER HANDLING EXCEPTED) WITHIN A PERIOD OF ONE(1) YEAR FROM THE DATE OF FINAL ACCEPTANCE BY THE OWNER.

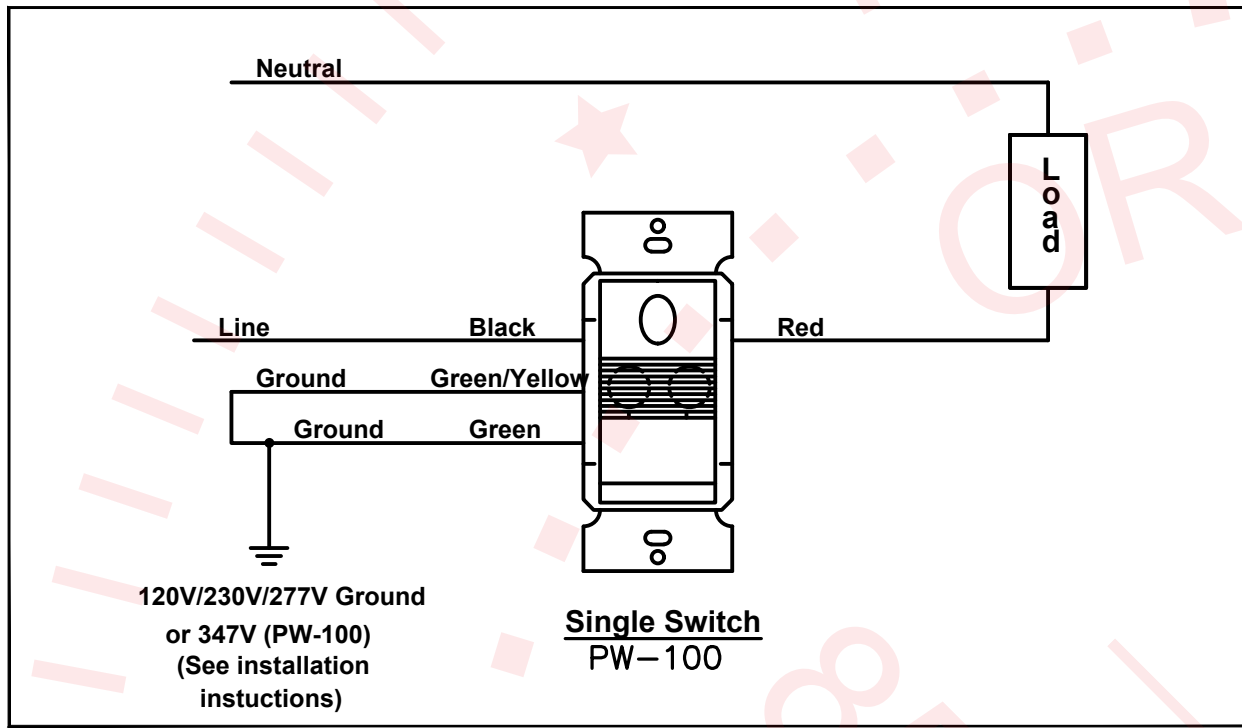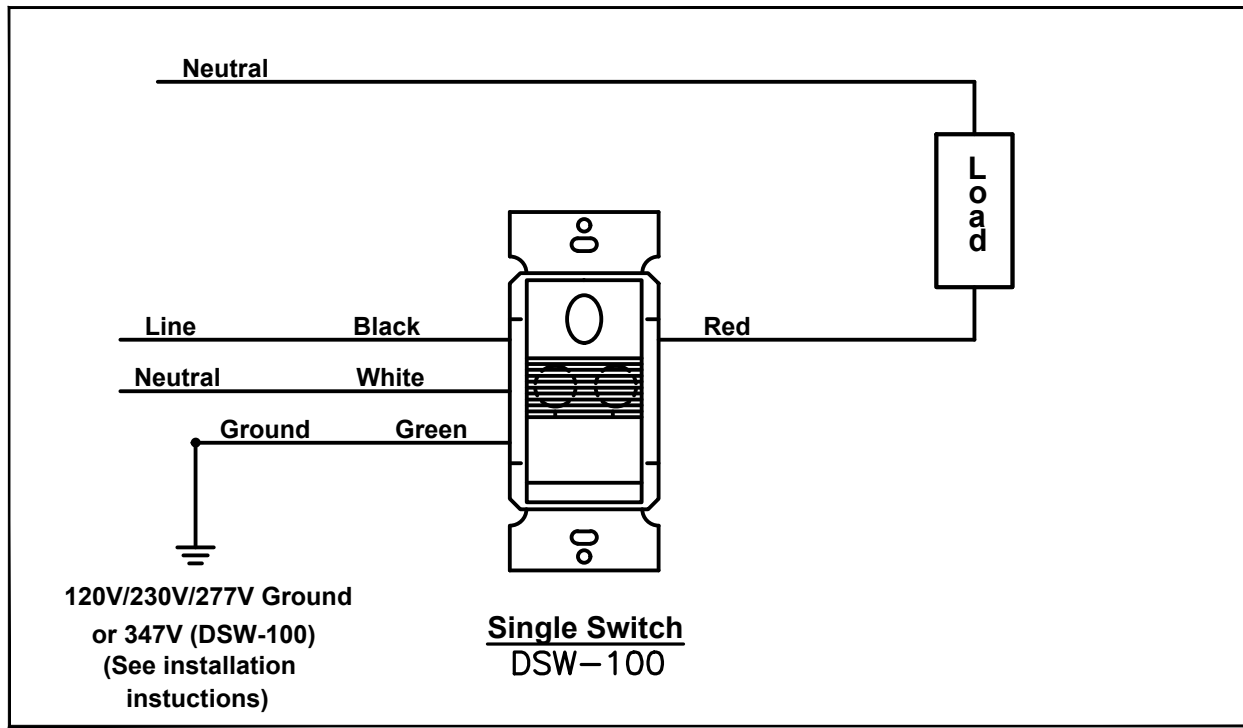

EQUALS TO BE SUBMITTED TO ARCHITECT/ENGINEER 10 DAYS PRIOR TO SUBMITTING BID FOR APPROVAL

LIGHTING FIXTURE SCHEDULE					
MARK	MANUFACTURER AND CATALOG No.	LAMPS		MOUNTING	REMARKS
		No.	TYPE		
FL	TGS #IFF-M-40-U-(OPTIONS)-(FINISH)-05-SF-M-FVL-(ACC)	80W	4000K LED	GROUND MOUNT	EXTERIOR GROUND-MOUNTED LED FLAG POLE LIGHT, UNV, SLIPFITTER MOUNT, FINISH BY ARCH.
LD4A	H.E. WILLIAMS 4DR-TL-L10/835-DIM-UNV-OW-OF-CS-MWT-N-F1	9W	3500K LED	CEILING RECESSED	4" RECESSED DOWNLIGHT, STD 0-10V DIMMING, 120V
LD4B	H.E. WILLIAMS 4DR-TL-L15/835-DIM-UNV-OW-OF-CS-MWT-N-F1	14W	3500K LED	CEILING RECESSED	4" RECESSED DOWNLIGHT, STD 0-10V DIMMING, 120V
LD6A	H.E. WILLIAMS 6DR-TL-L10/835-DIM-UNV-OW-OF-CS-MWT-N-F1	9W	3500K LED	CEILING RECESSED	6" RECESSED DOWNLIGHT, STD 0-10V DIMMING, 120V
LD6B	H.E. WILLIAMS 6DR-TL-L20/835-DIM-UNV-OW-OF-CS-MWT-N-F1	19W	3500K LED	CEILING RECESSED	6" RECESSED DOWNLIGHT, STD 0-10V DIMMING, 120V
LDO	H.E. WILLIAMS #80R-L40-840-DIM-UNV-OM-CS-WET/CC-N-F1	46W	4000K LED	CEILING RECESSED	8" RECESSED DOWNLIGHT, STD 0-10V DIMMING, UNV, WET LOC
LF2	DAYBRITE #2FPZ-38L-835-2-DS-UNV-DIM	34W	3500K LED	CEILING LAY-IN	2'X2' LED FLAT PANEL LAY-IN, STD 0-10V DIMMING, 120V.
LF4A	DAYBRITE #2FPZ-30L-835-4-DS-UNV-DIM	23W	3500K LED	CEILING LAY-IN	2'X4' LED FLAT PANEL LAY-IN, STD 0-10V DIMMING, 120V.
LF4B	DAYBRITE #2FPZ-48L-835-4-DS-UNV-DIM	37W	3500K LED	CEILING LAY-IN	2'X4' LED FLAT PANEL LAY-IN, STD 0-10V DIMMING, 120V.
LF4C	DAYBRITE #2FPZ-54L-835-4-DS-UNV-DIM	42W	3500K LED	CEILING LAY-IN	2'X4' LED FLAT PANEL LAY-IN, STD 0-10V DIMMING, 120V.
LF4D	DAYBRITE #2FPZ-60L-835-4-DS-UNV-DIM	47W	3500K LED	CEILING LAY-IN	2'X4' LED FLAT PANEL LAY-IN, STD 0-10V DIMMING, 120V.
LF4F	DAYBRITE #2FPZ-74L-835-4-DS-UNV-DIM	58W	3500K LED	CEILING LAY-IN	2'X4' LED FLAT PANEL LAY-IN, STD 0-10V DIMMING, 120V.
PL	OWNER-SELECTED PENDANT-MOUNTED DECORATIVE FIXTURE	50W	3500K LED	PDT-MT; FIELD-COORD EXACT HT	120V DECORATIVE PENDANT TO BE SELECTED BY OWNER, 3500K
UC4	H.E. WILLIAMS 1SF-4-L24-835-AF12125-WRS/120-DIM-120	21W	3500K LED	SURFACE MOUNT	1" x 48" UNDER-CTR LIGHT W/ ROCKER SWITCH, 120V
X/XA XC/XCA	CHLORIDE #CXL-3-R-W (AC ONLY)	1	LED	CEILING/WALL MOUNT	THERMOPLASTIC LED EXIT SIGN, 120V. USE PUNCH-OUTS TO SHOW DIRECTIONAL ARROWS AS DENOTED ON DRAWING(S)
WB36	H.E. WILLIAMS WVPH-L30-740-13-SDGL-DIM-UNV	36W	4000K LED	WALL MOUNT	EXTERIOR WALLPACK, FINISH BY ARCH, 120V...

*PRIOR TO ORDER, VERIFY ALL FINISHES WITH ARCHITECT PRIOR TO ORDER.
*EXACT FIXTURE AND ACCESSORIES TO BE VERIFIED WITH ARCHITECT DURING BID. ALL FINISHES TO BE SELECTED BY ARCHITECT.

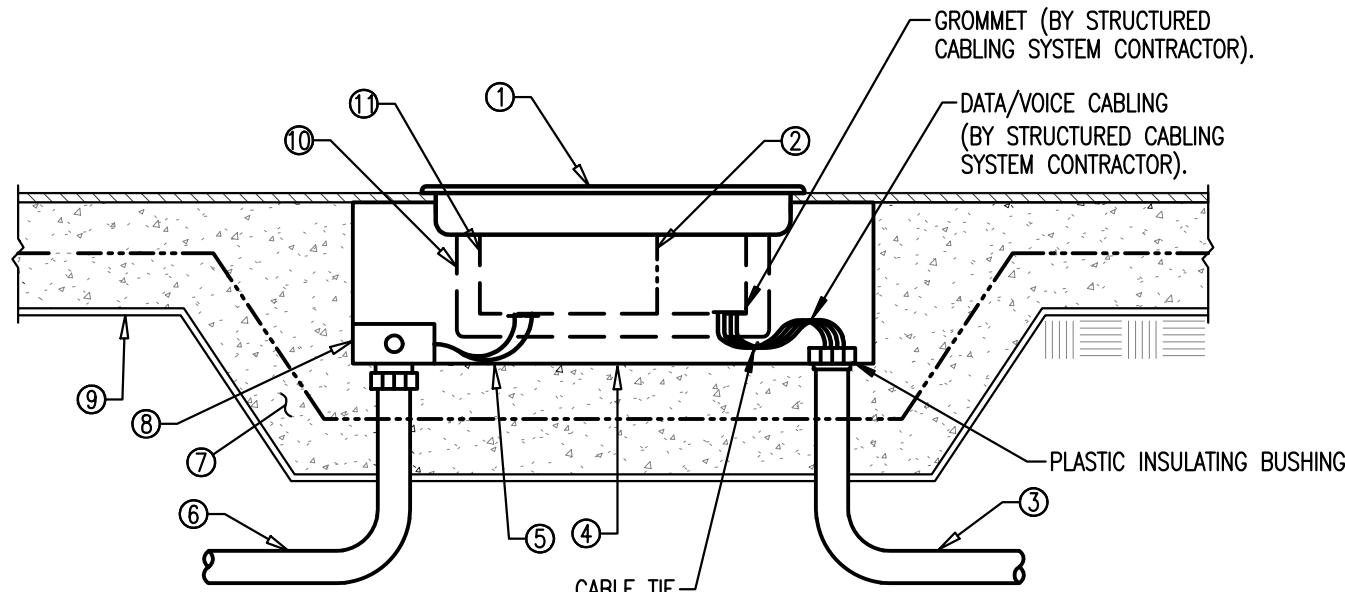

FLOOR BOX INSTALLATION DETAIL

DEMOLITION NOTES

1. ALL EXISTING SYSTEMS AND CONDITIONS SHOWN ON THE PLANS ARE APPROXIMATE. THE EXISTING ELECTRICAL CIRCUITS OF POWER, RECEPTACLES, LIGHTING, ETC. BEING REMOVED MAY NOT BE SHOWN ON THESE DOCUMENTS, BUT ARE TO BE REMOVED AS REQUIRED TO BUILD THIS PROJECT AND TO PERMIT NEW FINISHES, WALLS, ETC. THE CONTRACTOR SHALL YIELD VERY ALL CONDITIONS PRIOR TO BEGINNING ANY WORK AND SHALL NOTIFY THE ARCHITECT OF DISCREPANCIES. FAILURE TO DO SO INDICATES THAT THE CONTRACTOR ACCEPTS THE CONDITIONS AS THEY EXIST AND SHALL PERFORM ANY ADDITIONAL WORK NECESSARY TO PERFORM THE WORK AS SHOWN AND SPECIFIED.
2. IF A DEVICE IS BEING REMOVED AND THE CIRCUIT FEEDS OTHER LOADS FROM THE DEVICE, THEN THE WIRING SHALL BE MADE CONTINUOUS TO THE REMAINING LOADS. NO CIRCUIT CONTINUITY SHALL BE LOST.
3. IF A DEVICE IS BEING REMOVED AND NOT PART OF A DEMO WALL, THAT LOCATION SHALL BE RESTORED TO MATCH ADJACENT SURFACE.
4. REMOVE ALL DISCONNECTS, WIRING, AND CONDUITS SERVING MECHANICAL EQUIPMENT BEING REMOVED OR RELOCATED.
5. CONTRACTOR TO REMOVE ALL CONDUITS, & ASSOCIATED WIRING FROM DEVICES BEING REMOVED BACK TO PANEL UNLESS NOTED OTHERWISE. WHEN ALL LOADS ON EXISTING BREAKERS ARE REMOVED, RELABEL BREAKER AS "SPARE".

ELECTRICAL LEGEND

CEILING OUTLETS

-  RECESSED 2' X 4' FLUORESCENT/LED FIXTURE MARK "A" CIRCUIT TYPICAL
 NL  RECESSED 2' X 4' FLUORESCENT/LED FIXTURE INSTALLED FOR CONTINUOUS OPERATION
 INDICATES FIXTURE WITH EMERGENCY UNIT BATTERY PACK
 SURFACE MOUNTED, RECESSED OR SUSPENDED FLUORESCENT/LED FIXTURE MARK "A" AS NOTED
 SURFACE MOUNTED FLUORESCENT/LED STRIP FIXTURE MARK "TS" AS NOTED
 EXIT LIGHT
 JUNCTION BOX
 RECESSED/SURFACE MOUNT LIGHT
 NL  RECESSED/SURFACE MOUNT LIGHT INSTALLED FOR CONTINUOUS OPERATION

PANELS AND POWER

-  120/208 VOLT PANELBOARD
 EXISTING 120/208 VOLT PANELBOARD
 NON-FUSIBLE DISCONNECT SWITCH; XX/YY/ZZ WHERE X INDICATES AMPERAGE, Y INDICATES # OF POLES, AND Z INDICATES NEMA RATING


FIRE ALARM SYSTEM

- | | |
|--|---|
|  | FIRE ALARM SYSTEM MANUAL PULL STATION; MT 48" AFF TO C/L |
|  | FIRE ALARM SYSTEM SIGNAL <u>SPEAKER</u> /STROBE; MT 48" AFF TO <u>BOTTOM</u> . |
| WP  | WEATHERPROOF FIRE ALARM SYSTEM SIGNAL <u>SPEAKER</u> ; MOUNT 80" AFF TO <u>BOTTOM</u> |
|  | FIRE ALARM SYSTEM STROBE; MT. 80" AFF TO <u>BOTTOM</u> . |
|  | FIRE ALARM SYSTEM AUTOMATIC HEAT DETECTOR; 135 DEGREE/RATE OF RISE TYPE; CEILING MOUNTED |
|  | FIRE ALARM SYSTEM AUTOMATIC SMOKE DETECTOR; CEILING MOUNTED |
|  | FIRE ALARM SYSTEM RACEWAY INSTALLED CONCEALED; ARROW INDICATES HOMERUN TO FIRE ALARM CONTROL PANEL |
|  | FIRE ALARM SYSTEM AUTOMATIC AIR DUCT SMOKE DETECTOR MOUNTED IN SUPPLY AIR DUCT |
|  | FIRE ALARM SYSTEM AUTOMATIC AIR DUCT SMOKE DETECTOR MOUNTED IN RETURN AIR DUCT |
|  | NORMALLY CLOSED RELAY IN H.V.A.C CONTROL CIRCUIT TO OPEN UPON ACTIVATION OF BUILDING FIRE ALARM SYSTEM TO SHUT DOWN A/C UNIT. CONTACTS RATED 5 AMPS, 120 VOLTS. |
|  | REMOTE INDICATOR LIGHT; FIELD-VERIFY EXACT LOCATION OF INSTALLATION |
|  | FIRE ALARM SYSTEM MAGNETIC DOOR HOLDERS; WHERE APPLICABLE, EC TO PROVIDE 120V POWER AT DEVICE |
|  | FIRE ALARM SYSTEM FLOW SWITCH |
|  | FIRE ALARM SYSTEM TAMPER SWITCH |

WALL SWITCHES (UNLESS OTHERWISE NOTED, MOUNT 48" A.F.F.)

- | | | | |
|-----------------|--|---|--|
| S ₁ | A.C. TYPE, SINGLE POLE, 20 AMP, 120/277 VOLT; MOUNT 48" AFF TO C/L | ➔ | DUPLEX RECEPTACLE ~ 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 6" ABOVE COUNTER |
| S ₃ | A.C. TYPE, 3-WAY, 20 AMP, 120/277 VOLT; MOUNT 48" AFF TO C/L | ➔ | DUPLEX RECEPTACLE ~ 20 AMP, 125 VOLT, GFI, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 6" ABOVE COUNTER |
| S ₄ | A.C. TYPE, 4-WAY, 20 AMP, 120/277 VOLT; MOUNT 48" AFF TO C/L | ➔ | DUPLEX RECEPTACLE ~ 20 AMP, 125 VOLT, GFI, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 6" ABOVE COUNTER. <u>HORIZONTALLY</u> |
| S _M | MOTOR-RATED TOGGLE SWITCH; FIELD-VERIFY EXACT HT & LOCATION WITH EQUIPMENT INSTALLER | ➔ | DUPLEX RECEPTACLE ~ 20 AMP, 125 VOLT, GFI, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 28" AFF TO C/L FOR DRINKING FOUNTAIN |
| S _R | WALL MOUNTED OCCUPANCY SENSOR (PASSIVE INFRARED) EQUAL TO WATTSOURCE PW-100; SET DELAY OFF TIME FOR 10 MINUTES (120/277V); MOUNT 48" AFF TO C/L | ➔ | QUADRAPLEX RECEPTACLE ~ 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 18" A.F.F. UNLESS NOTED OTHERWISE |
| S _{RD} | WALL MOUNTED OCCUPANCY SENSOR EQUAL TO WATTSOURCE DSW-100; DUAL TECHNOLOGY; MOUNT 48" AFF TO C/L; SET DELAY OFF TIME FOR 10 MINUTES (120/277V) | ➔ | QUADRAPLEX RECEPTACLE ~ 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 18" A.F.F. UNLESS NOTED OTHERWISE |
| S _{RS} | ■=10% DIMMING W/ 50%, 75%, & 100% PRE-SETS WALL MOUNTED OCCUPANCY SENSOR (PASSIVE INFRARED) EQUAL TO WATTSOURCE PW-311; SET DELAY OFF TIME FOR 10 MINUTES (120/277V); MOUNT 48" AFF TO C/L. IF DIMMING IS DESIRED IN A SPACE, A SEPARATE 0-10V 2-WIRE CONTROL CIRCUIT (MIN. 18GA) TO BE INSTALLED FROM DEVICE TO ALL FIXTURES IN ASSOCIATED DIMMING ZONE (FIXTURES TO BE DASHY-CHAINED). | ➔ | QUADRAPLEX RECEPTACLE ~ 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 18" A.F.F. UNLESS NOTED OTHERWISE. 'H' DENOTES DEVICE TO BE MOUNTED HORIZONTALLY |
| S _{DS} | 0-10V DIMMING W/ 50%, 75%, & 100% PRE-SETS WALL MOUNTED OCCUPANCY SENSOR (PASSIVE INFRARED & ULTRASONIC) EQUAL TO WATTSOURCE DW-311; SET DELAY OFF TIME FOR 10 MINUTES (120/277V); MOUNT 48" AFF TO C/L. IF DIMMING IS DESIRED IN A SPACE, A SEPARATE 0-10V 2-WIRE CONTROL CIRCUIT (MIN. 18GA) TO BE INSTALLED FROM DEVICE TO ALL FIXTURES IN ASSOCIATED DIMMING ZONE (FIXTURES TO BE DASHY-CHAINED). | ➔ | 240V RECEPTACLE ~ MOUNT 18" AFF UNLESS NOTED OTHERWISE; VERIFY TYPE REQUIRED WITH EQUIPMENT FURNISHED |
| DL | PHILLIPS SUNRISE 1200W ELECTRONIC WALL DIMMER (MODEL# SR1200ZTNV); EC TO INSTALL 120V HOTLEG (LOAD SIDE OF OCCUPANCY SENSOR SWITCH) TO DIMMING MODULE AND FROM MODULE TO FIXTURE; IN ADDITION, INSTALL A 2-WIRE (#16 AWG) DIMMING CIRCUIT FROM DIMMER MODULE TO LIGHTING FIXTURE(S) TO BE CONTROLLED. WITHIN EACH ZONE, DIMMING CIRCUIT MAY BE DASHY-CHAINED AND NOT SEPARATE RUNS FROM MODULE TO EACH FIXTURE REQUIRED. IF OTHER THAN-SPECIFIED MANUFACTURERS/FIXTURE TYPES FURNISHED, EC TO VERIFY THAT DIMMING MODULE SUPPLIED TO BE 100% COMPATIBLE WITH FIXTURES TO BE INSTALLED. MOUNT 48" AFF TO C/L. IF EMERGENCY EGRESS FIXTURES W/ BATTERY BACKUP ARE WITHIN ZONE OF CONTROL, INSTALL A SEPARATE NON-SWITCHED 120V HOTLEG FOR CONTINUAL CHARGING OF BATTERIES. | ➔ | JUNCTION BOX WITH BLANK SCREW COVER AND FLEXIBLE CORDOUT CONNECTION |
| | | ⊗ | SURFACE-MOUNTED JUNCTION BOX WITH BLANK SCREW COVER (UNLESS DEVICE SHOWN TO BE INSTALLED); SIZE OF BOX TO BE DETERMINED BY DEVICE BEING INSTALLED |
| | | ⊗ | WALL MOUNTED EXIT LIGHT |
| | | ⊗ | WALL MOUNTED HIGH INTENSITY DISCHARGE FIXTURE |
| | | ⊗ | WALL MOUNTED EMERGENCY UNIT BATTERY PACK |
| | | ⊗ | WALL MOUNTED EXIT LIGHT/BATTERY PACK COMBO FIXTURE |
| | | ⊗ | SIDEWALL PHOTOCELL EQUAL TO TORQ #2101 (120V) |
| | | ➔ | DUPLEX RECEPTACLE ~ 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 18" A.F.F. UNLESS NOTED OTHERWISE; LABEL "COMPUTER USE ONLY" |

AUTOMATIC LIGHTING CONTROL SYSTEM

-  180° CEILING MOUNTED OCCUPANCY SENSOR EQUAL TO WATTSTOPPER DT-205 (LOW VOLTAGE); DUAL TECHNOLOGY INFRARED AND ULTRASONIC, 2000 SQ FT COVERAGE; SEE CEILING MOUNTED MOTION DETECTOR DETAIL.
-  360° CEILING MOUNTED OCCUPANCY SENSOR EQUAL TO WATTSTOPPER DT-355 (LINE VOLTAGE); DUAL TECHNOLOGY INFRARED AND ULTRASONIC, 1000 SQ FT COVERAGE; SEE CEILING MOUNTED MOTION DETECTOR DETAIL.
-  POWER PACK RELAY EQUAL TO WATTSTOPPER BZ-500 POWER PACK; SEE CEILING MOUNTED MOTION DETECTOR DEVICE TO BE MOUNTED ABOVE CEILING. (UNIVERSAL 100-277V)...20 AMP MAX. SWITCHING CAPABILITY. CAPABILITY
- BRANCH CIRCUITING**
-  RUN CONCEALED UNDER FLOOR OR IN GRADE
-  RUN CONCEALED IN CEILING OR WALLS
-  HOMERUN TO PANEL. ANY CIRCUIT WITHOUT FURTHER IDENTIFICATION INDICATES #12, 1#12 GROUND-1/2" C; ~~3~~ 3 #12, 1#12 GROUND - 1/2" C; ~~4~~ 4#12, 1#12 GROUND - 1/2" C; AS PER NEC. LETTERS AND NUMERALS INDICATE PANEL AND CIRCUIT NUMERALS INDICATE PANEL AND CIRCUIT NUMBER.
-  LIQUID-TIGHT FLEXIBLE CONDUIT CONNECTION
-  SURFACE MOUNTED CONDUIT; RUN PARALLEL OR PERPENDICULAR TO BUILDING LINES

TELEPHONE & TV SYSTEM


- | | |
|-------|---|
| ▷ | WALL OUTLET - 4" SQ X 2-1/8" DEEP BOX @ 18" A.F.F. TO C/L OF DEVICE U.N.O.; INSTALL 3/4"C TO ACCESSIBLE LOCATION ABOVE CEILING. COMMUNICATIONS CONTRACTOR SHALL PROVIDE COVERPLATES, INSERTS, ETC. |
| C ▷ | WALL OUTLET - 4" SQ X 2-1/8" DEEP BOX @ 6" ABOVE COUNTER TO C/L OF DEVICE U.N.O.; INSTALL 3/4"C TO ACCESSIBLE LOCATION ABOVE CEILING. COMMUNICATIONS CONTRACTOR SHALL PROVIDE COVERPLATES, INSERTS, ETC.; |
| C,H ▷ | WALL OUTLET - 4" SQ X 2-1/8" DEEP BOX @ 6" HORIZONTALLY ABOVE COUNTER TO C/L OF DEVICE; INSTALL 3/4"C TO ACCESSIBLE LOCATION ABOVE CEILING; COMMUNICATIONS CONTRACTOR SHALL PROVIDE COVERPLATES, INSERTS, ETC. |
| CBB | 3/4" (60" HIGH) TELEPHONE BACKBOARD EXTERIOR GRADE PLYWOOD WITH TWO COATS OF INSULATING VARNISH, SIZE AS SHOWN |
| ⊗ | TELEVISION CABLE WALL OUTLET - 4" SQ X 2-1/8" DEEP BOX; INSTALL 3/4"C TO ACCESSIBLE LOCATION ABOVE CEILING. COMMUNICATIONS CONTRACTOR SHALL PROVIDE COVERPLATES, INSERTS, ETC..MOUNT 18" A.F.F. TO C/L OF DEVICE U.N.O. |

WALL OUTLETS

- T ⊖ DUPLEX RECEPTACLE - 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 18" A.F.F. UNLESS NOTED OTHERWISE
 G ⊖ DUPLEX RECEPTACLE - 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 18" A.F.F. UNLESS NOTED OTHERWISE
 H ⊖ DUPLEX RECEPTACLE - 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 18" A.F.F. UNLESS NOTED OTHERWISE.
 'H' DENOTES DEVICE TO BE MOUNTED HORIZONTALLY
 WP ⊖ DUPLEX WEATHERTIGHT/WEATHER-RESISTANT (WR) RECEPTACLE - 20 AMP, 125 VOLT, GFI, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 18" A.F.F. UNLESS NOTED OTHERWISE. PROVIDE WEATHERPROOF BOX FOR RECEPTACLE. DEVICE MUST COMPLY WITH NEC 406.9
 ⊖ DUPLEX RECEPTACLE - 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT FLUSH IN CEILING
 ⊖ DUPLEX RECEPTACLE - 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT ADJACENT TO TELEVISION OUTLET AT SAME HEIGHT.
 ⊖ DUPLEX RECEPTACLE - 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 6" ABOVE COUNTER
 ⊖ G DUPLEX RECEPTACLE - 20 AMP, 125 VOLT, GFI, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 6" ABOVE COUNTER
 ⊖ G,H DUPLEX RECEPTACLE - 20 AMP, 125 VOLT, GFI, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 6" ABOVE COUNTER. HORIZONTAL
 ⊖ DUPLEX RECEPTACLE - 20 AMP, 125 VOLT, GFI, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 26" AFF TO C/L FOR DRINKING FOUNTAIN
 ⊖ QUADRAPLEX RECEPTACLE - 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 18" A.F.F. UNLESS NOTED OTHERWISE
 H ⊖ QUADRAPLEX RECEPTACLE - 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 18" A.F.F. UNLESS NOTED OTHERWISE
 'H' DENOTES DEVICE TO BE MOUNTED HORIZONTALLY
 ⊕ 240V RECEPTACLE - MOUNT 18" AFF UNLESS NOTED OTHERWISE; VERIFY TYPE REQUIRED WITH EQUIPMENT FURNISHED
 ⊕ JUNCTION BOX WITH BLANK SCREW COVER AND FLEXIBLE CONDUIT CONNECTION
 ⊗ SURFACE-MOUNTED JUNCTION BOX WITH BLANK SCREW COVER (UNLESS DEVICE SHOWN TO BE INSTALLED); SIZE OF BOX TO BE DETERMINED BY DEVICE BEING INSTALLED
 ⊗ WALL MOUNTED EXIT LIGHT
 ⊕ WALL MOUNTED HIGH INTENSITY DISCHARGE FIXTURE
 ⊕ WALL MOUNTED EMERGENCY UNIT BATTERY PACK
 ⊕ WALL MOUNTED EXIT LIGHT/BATTERY PACK COMBO FIXTURE
 ⊕ SIDEWALL PHOTOCELL EQUAL TO TORK #2101 (120V)
 ⊖ DUPLEX RECEPTACLE - 20 AMP, 125 VOLT, 2 POLE, 3 WIRE GROUNDED TYPE, NEMA 5-20R. MOUNT 18" A.F.F. UNLESS NOTED OTHERWISE; LABEL "COMPUTER USE ONLY"

MISCELLANEOUS

- A.F.F. ABOVE FINISH FLOOR
B.F.C. BELOW FINISHED CEILING
e EXISTING

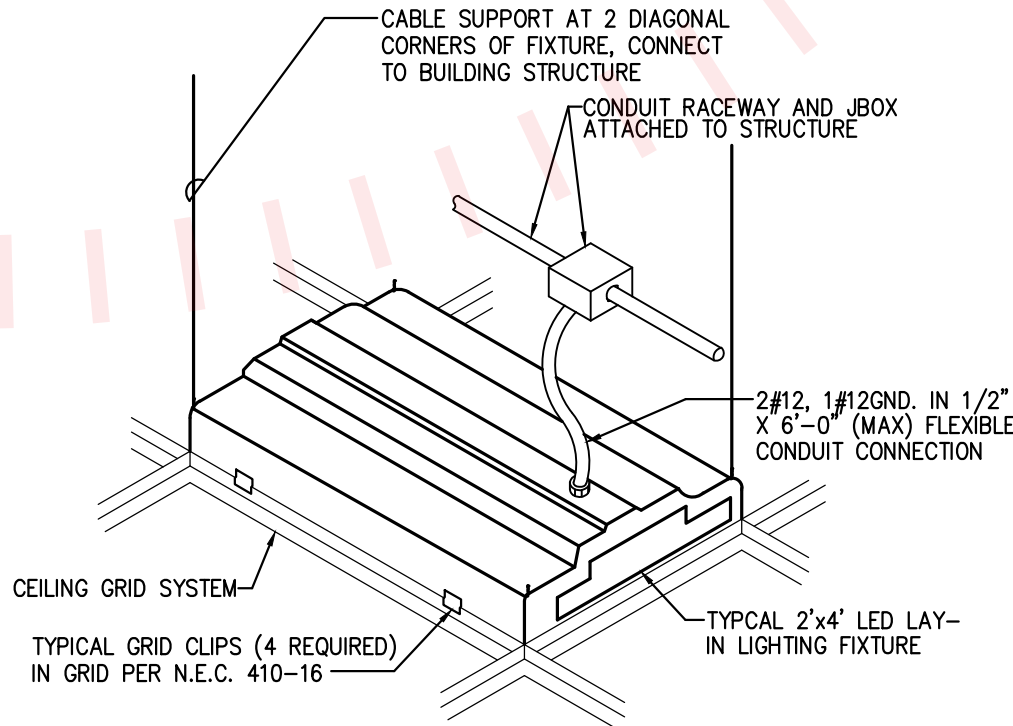

TYPICAL LAY-IN FIXTURE DETAIL



Florida CA Number: 27825
Anthony L Davis, PE
Florida License Number: 57419
850.526.3447
Project Number: 2023-091
Checked By: ALD
Drawn By: KEF

The logo for DAG ARCHITECTS. It features a square frame containing the letters "DAG" in a bold, sans-serif font. A diagonal line runs from the top right corner to the bottom left corner, passing behind the letters. Below the square frame, the word "ARCHITECTS" is written in a smaller, bold, sans-serif font.

DAG Architects AR0009694
455 Harrison Ave Suite I Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.

RENOVATIONS & NEW CONSTRUCTION FOR PANCARE CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS

[illegible]

GENERAL NOTES AND LEGEND

PROJECT NUMBER	23071
DATED	02/05/2024

E001

CIRCUIT BREAKER PANEL SCHEDULE										SURFACE MOUNTED NEMA 1 ENCLOSURE	
EXISTING PANEL 'MP'											
120/208 VOLT 3Ø 4W 600 AMP MAIN BREAKER SERVICE-RATED		BREAKER POLE AMP		LOAD KVA		BREAKER AMP POLE		LOAD DESCRIPTION		CKT	
1	↑	3	225	--	--	225	3	↑	"EP" VIA TRANSFER SWITCH	2	
3	↑	3	225	--	--	225	3	↑	"EP" VIA TRANSFER SWITCH	4	
5	↑	3	225	--	--	225	3	↑	"EP" VIA TRANSFER SWITCH	6	
7	(EXISTING SPACE)	(1) 3	45	8.06	23.92	100	(1) 3	(EXISTING SPACE)	NEW PANEL 'P2'	8	
9	(EXISTING SPACE)	(1) 3	45	8.06	23.92	100	(1) 3	(EXISTING SPACE)	NEW PANEL 'P2'	10	
11	(EXISTING SPACE)	(1) 3	45	8.06	23.92	100	(1) 3	(EXISTING SPACE)	NEW PANEL 'P2'	12	
13	↑	3	30	--	--	50	3	↑	EXISTING IDHP-1	14	
15	EXISTING ODHP-1	3	30	--	--	50	3	↑	EXISTING IDHP-1	16	
17	↑	3	30	--	--	50	3	↑	EXISTING IDHP-1	18	
19	↑	3	30	--	--	50	3	↑	EXISTING IDHP-1	20	
21	EXISTING ODHP-2	3	40	--	--	30	3	↑	EXISTING SURGE PROTECTIVE DEVICE	22	
23	↑	3	40	--	--	30	3	↑	EXISTING SURGE PROTECTIVE DEVICE	24	
25	↑	3	40	--	--	30	3	↑	EXISTING SURGE PROTECTIVE DEVICE	26	
27	EXISTING IDHP-2	3	100	--	--	20	3	↑	EXISTING ODHP-1	28	
29	↑	3	100	--	--	20	3	↑	EXISTING ODHP-1	30	
31	(EXISTING SPACE)	(1) 3	60	10.08	--	60	2	(EXISTING SPACE)	EXISTING SPACE	32	
33	(EXISTING SPACE)	(1) 3	60	10.08	--	60	2	(EXISTING SPACE)	EXISTING SPACE/LIFT STATION	34	
35	(EXISTING SPACE)	(1) 3	60	10.08	--	60	2	(EXISTING SPACE)	EXISTING SPACE/LIFT STATION	36	
37	(EXISTING SPACE)	(1) 2	60	8.65	8.65	60	(1) 2	(EXISTING SPACE)	IDHP-1	38	
39	(EXISTING SPACE)	(1) 2	60	8.65	8.65	60	(1) 2	(EXISTING SPACE)	IDHP-1	40	
41	EXISTING SPACE	1	--	--	--	--	1	EXISTING SPACE	EXISTING SPACE	42	
TOTAL CONNECTED LOAD: XX.X KVA MINIMUM INTERRUPTING CAPACITY: AIC TO MATCH EXISTING											
① EC TO FURNISH NEW HACR RATED BREAKER; VERIFY SIZE REQUIRED FOR EQUIPMENT FURNISHED ② EC TO RELABEL EXISTING BREAKER AS 'SPARE' ③ FURNISH NEW BREAKER											

120/208 VOLT 3Ø 4W
225 AMP MAIN BREAKER

CIRCUIT BREAKER PANEL SCHEDULE
EXISTING PANEL 'EP'

SURFACE MOUNTED
NEMA 1 ENCLOSURE

CKT	LOAD DESCRIPTION	BREAKER		LOAD KVA	BREAKER		LOAD DESCRIPTION	CKT
		POLE	AMP		POLE	AMP		
1	EXISTING LTC SERVER 106	1	20	---	---	30	2	2
3	EXISTING RCPT. SERVER 106	1	20	---	---	30	2	4
5	EXISTING RCPT. SERVER 106	1	20	---	---	30	2	6
7	EXISTING RCPT. SERVER 106	1	20	---	---	30	2	8
9	EXISTING RCPT. SERVER 106	1	20	---	---	50	2	10
11	EXISTING RCPT. SERVER 106	1	20	---	---	30	2	12
13	EXISTING RCPT. DISASTER RECOV. 107	1	20	---	---	30	2	14
15	EXISTING RCPT. DISASTER RECOV. 107	1	20	---	---	20	2	16
17	EXISTING RCPT. DISASTER RECOV. 107	1	20	---	---	20	2	18
19	EXISTING RCPT. DISASTER RECOV. 107	1	20	---	---	20	1	20
21	EXISTING RCPT. TELLER LINE	1	20	---	---	20	1	22
23	EXISTING RCPT. TELLER LINE	1	20	---	---	20	1	24
25	EXISTING RCPT. TELLER LINE	1	20	---	---	20	1	26
27	EXISTING RCPT. COM. RM.	1	20	---	---	20	1	28
29	EXISTING RCPT. COM. RM.	1	20	---	---	20	1	30
31	EXISTING RCPT. COM. RM.	1	20	---	---	20	1	32
33	EXISTING RCPT. DRIVER THRU TELLER	1	20	---	---	20	1	34
35	EXISTING RCPT. DRIVER THRU TELLER	1	20	---	---	20	1	36
37	EXISTING RCPT. DRIVER THRU TELLER	1	20	---	---	20	1	38
39	EXISTING RCPT. DRIVER THRU TELLER	1	20	---	---	20	1	40
41	EXISTING RCPT. DRIVER THRU TELLER	1	20	---	---	20	1	42

TOTAL CONNECTED LOAD: XX.XX KVA
MINIMUM INTERRUPTING CAPACITY: AIC TO MATCH EXISTING


120/208 VOLT 3Ø 4W 225 AMP MAIN LUG ONLY					CIRCUIT BREAKER PANEL SCHEDULE EXISTING PANEL 'PI' SECTION I & 2					SURFACE MOUNTED NEMA 1 ENCLOSURE	
CKT	LOAD DESCRIPTION	BREAKER		LOAD KVA	BREAKER		LOAD DESCRIPTION	CKT			
		POLE	AMP		AMP	POLE					
1	EXISTING SPARE	1	20	--	--	20	1	EXISTING SPARE	2		
3	EXISTING SPARE	1	20	--	--	20	1	EXISTING SPARE	4		
5	EXISTING LIGHTS WORK BREAK OFFICES	1	20	--	--	20	1	EXISTING SPARE	6		
7	EXISTING SMOKE DAMPERS	1	20	--	--	20	1	EXISTING SPARE	8		
9	EXISTING LIGHTS SOFFET	1	20	--	--	20	1	EXISTING SPARE	10		
11	EXISTING LIGHTS TELLER LINE	1	20	--	--	20	1	EXISTING SPARE	12		
13	EXISTING SPARE	1	20	--	--	20	1	EXISTING FLAG POLE LTS	14		
15	EXISTING LIGHTS DRIVE THRU	1	20	--	--	20	1	EXISTING ROAD SIGN/TIME CLOCK	16		
17	EXISTING SPARE	1	20	--	--	20	2	EXISTING POLE LTS	18		
19	EXISTING LIGHTS OPEN OFFICE	1	20	--	--	↓	↓		20		
21	EXISTING SPARE	1	20	--	--	20	2	EXISTING POLE LTS	22		
23	EXISTING SPARE	1	20	--	--	↓	↓		24		
25	EXISTING RECEPT. TELLER AREA	1	20	--	--	20	2	EXISTING SPARE/MINI SPLIT	26		
27	EXISTING SPARE	1	20	--	--	↓	↓		28		
29	EXISTING SPARE	1	20	--	--	30	1	EXISTING SPARE	30		
31	EXISTING SPARE	1	20	--	--	30	1	EXISTING SPARE	32		
33	EXISTING SPARE	1	20	--	--	30	1	EXISTING SPARE	34		
35	EXISTING SPARE	1	20	--	--	30	1	EXISTING SPARE	36		
37	↑	↑	↑	--	--	30	1	EXISTING SPARE	38		
39	EXISTING SPARE	3	30	--	--	20	1	EXISTING RCPT BLOWER	40		
41	↓	↓	↓	--	--	20	1	EXISTING RCPT BLOWER	42		
43	EXISTING RCPT. OFFICE	1	20	--	--	20	1	EXISTING RCPT. WORK ROOM	44		
45	EXISTING RCPT. OFFICE	1	20	--	--	20	1	EXISTING RCPT. LOBBY	46		
47	EXISTING RCPT. OFFICE	1	20	--	--	20	1	EXISTING RCPT. WORK ROOM	48		
49	EXISTING RCPT. OPEN OFFICE	1	20	--	--	20	1	EXISTING RCPT. WORK ROOM	50		
51	EXISTING RCPT. OPEN OFFICE	1	20	--	--	20	1	EXISTING RCPT. BREAK ROOM	52		
53	EXISTING SPARE	1	20	--	--	20	1	EXISTING RCPT. COPIER	54		
55	EXISTING RCPT. OPEN OFFICE	1	20	--	--	20	1	EXISTING SPARE/ MINI SPLIT	56		
57	EXISTING RCPT. LOBBY	1	20	--	--	20	1	EXISTING SPARE/ MINI SPLIT	58		
59	EXISTING RCPT. LOBBY	1	20	--	--	20	1	EXISTING SPARE	60		
61	EXISTING RCPT. OFFICE WORK	1	20	--	--	20	1	EXISTING SPARE	62		
63	EXISTING RCPT. WORK, ELEC. RESTROOM	1	20	--	--	20	1	EXISTING SPARE	64		
65	EXISTING SPARE	1	20	--	--	20	1	EXISTING SPARE	66		
67	EXISTING RECEPT. WORK ROOM	1	20	--	--	20	1	EXISTING SPARE	68		
69	EXISTING RCPT. APPLIANCE	1	20	--	--	20	1	EXISTING GEN. BATTERY/BLK.HEATER	70		
71	EXISTING RCPT. APPLIANCE	1	20	--	--	20	1	EXISTING SPARE	72		
73	EXISTING RCPT. REFRIGERATOR	1	20	--	--	20	1	EXISTING L&G BID	74		
75	EXISTING SIGN LIGHT	1	20	--	--	20	1	EXISTING SPARE	76		
77	EXISTING WATER COOLER	1	20	--	--	20	1	EXISTING SPARE	78		
79	EXISTING MARQUIS	1	30	--	--	30	1	EXISTING SPARE	80		
81	EXISTING MARQUIS	1	30	--	--	30	1	EXISTING SPARE	82		
83	EXISTING SPARE	1	20	--	--	20	1	EXISTING WATER HEATER OUTSIDE RCPT. DRIVE THRU	84		
TOTAL CONNECTED LOAD: XX.XX KVA MINIMUM INTERRUPTING CAPACITY: AIC TO MATCH EXISTING											

CIRCUIT BREAKER PANEL SCHEDULE										SURFACE MOUNTED NEMA 1 ENCLOSURE	
PANEL 'P2'											
120/208 VOLT 3Ø 4W 100 AMP MAIN LUG ONLY											
CKT	LOAD DESCRIPTION	BREAKER POLE AMP		LOAD KVA		BREAKER AMP POLE		LOAD DESCRIPTION		CKT	
1	REC-PHARMACY STORAGE 133	1	20	1.08	1.44	20	1	REC-OFFICE 129/DENTAL SUPPLIES CLOSET 128A	2		
3	MODEL TRIMMER #41	1	20	1.2	0.24	20	1	ULTRASONIC CLEANER #52	4		
5	LAB CABINETS #31	1	20	0.5	0.72	20	1	REC-DENTAL LAB 128/TREATMENT 3	6		
7	REC-PHARMACY DRIVE-THRU WINDOW	1	20	0.18	1.08	20	1	REC-TREATMENT 1/2, RSTRM	8		
9	COMPRESSOR	2	20①	2.37	0.36	20	1	REC-CORRIDOR 125 (COMPUTER)	10		
11	↓	↓	↓	↓	↓	20	1	REC-TREATMENT 4	12		
13	HANDPIECE STA #50	1	20	0.24	0.50	20②	1	TREATMENT 1 & 2-INTRAORAL X-RAY	14		
15	STERILIZATION CABINET #22	1	20	0.5	0.54	20	1	REC-TREATMENT 3 (DENTAL CHAIR & REAR CAB.)	16		
17	STERILIZER	1	20	1.44	0.54	20	1	REC-TREATMENT 4 (DENTAL CHAIR & REAR CAB.)	18		
19	STERILIZATION CABINET CLEAN #22A	1	20	0.5	0.54	20	1	REC-TREATMENT 1 (DENTAL CHAIR & REAR CAB.)	20		
21	DRY VACUUM SYSTEM #61	2	20①	2.37	0.54	20	1	REC-TREATMENT 2 (DENTAL CHAIR & REAR CAB.)	22		
23	↓	↓	↓	↓	↓	20②	1	TREATMENT 3 & 4-INTRAORAL X-RAY	24		
25	DIGITAL PANO	2	20①	0.5	0.48	20③	1	EWC	26		
27	↓	↓	↓	↓	↓	20	1	REC-LOBBY	28		
29	PANEL	1	20	0.5	0.36	20	1	REC-LOBBY	30		
31	SPARE	1	20	---	0.90	20	1	REC-PHARMACY DRIVE-THRU 133A	32		
33	SPARE	1	20	---	0.54	20	1	REC-PHARMACY DRIVE-THRU 133A	34		
35	SPARE	1	20	---	0.38	20	1	REC-PHARMACY DRIVE-THRU 133A (REFRIGERATOR)	36		
37	SPARE	1	20	---	0.9	20	1	REC-PHARMACY STORAGE 133 (COMPUTER)	38		
39	SPARE	1	20	---	0.54	20	1	REC-Rx RETAIL 132	40		
41	SPARE	1	20	---	0.54	20	1	REC-Rx RETAIL 132	42		
TOTAL CONNECTED LOAD: 23.92 KVA MINIMUM INTERRUPTING CAPACITY: 10,000 AMPS SYMMETRICAL											
① HACR RATED BREAKER; VERIFY SIZE REQUIRED FOR EQUIPMENT FURNISHED ② FURNISH BREAKER W/ HANDLE 'LOCK-OFF' ③ FURNISH GFCI BREAKER											




Florida CA Number: 27825
Anthony L. Davis, PE
Florida License Number: 57419
850.526.3447
Project Number: 2023-091
Checked By: ALD
Drawn By: KEF



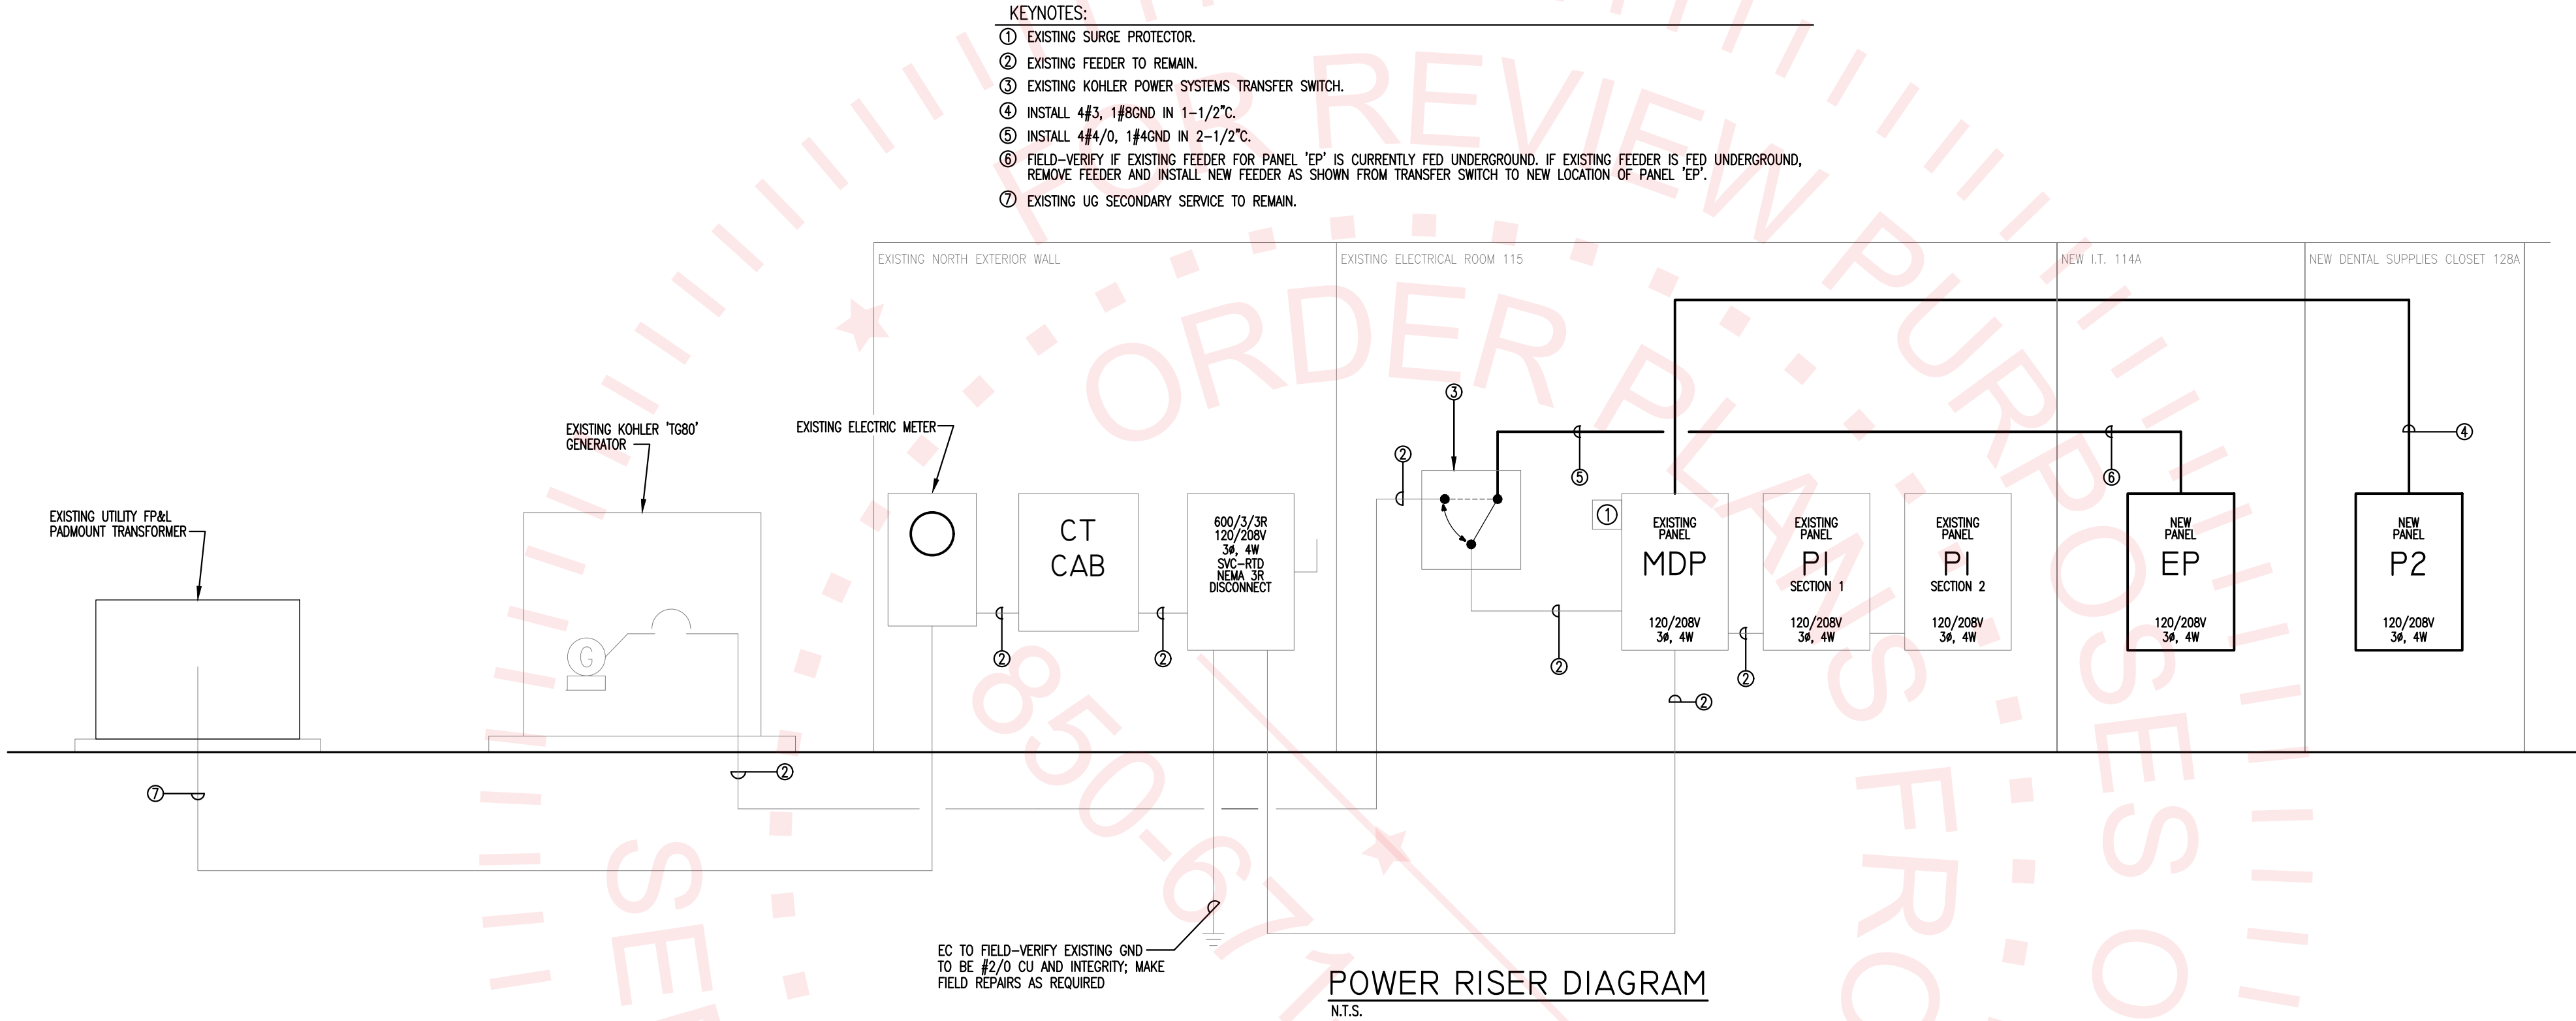


POWER RISER DIAGRAM
N.T.S.

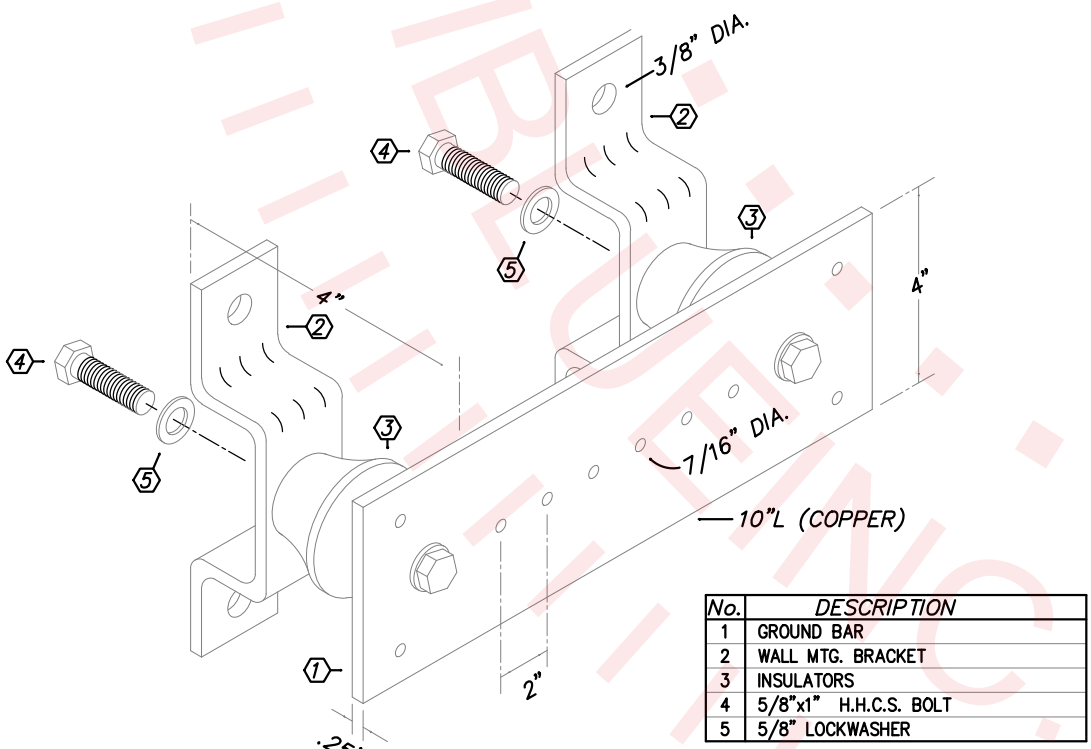

INSULATED GROUNDING BUSBAR DETAIL
NOT TO SCALE

- GROUND BAR NOTES:
- INSTALL ONE BAR AT EACH COMMUNICATIONS BACKBOARD.
 - ROUTE 1#2 BARE CU IN 1" C. TO ELECTRICAL SERVICE GND FROM BAR ON MAIN COMM. BACKBOARD.
 - CONNECT BARS WITH 1#6 BARE CU IN 1" C.

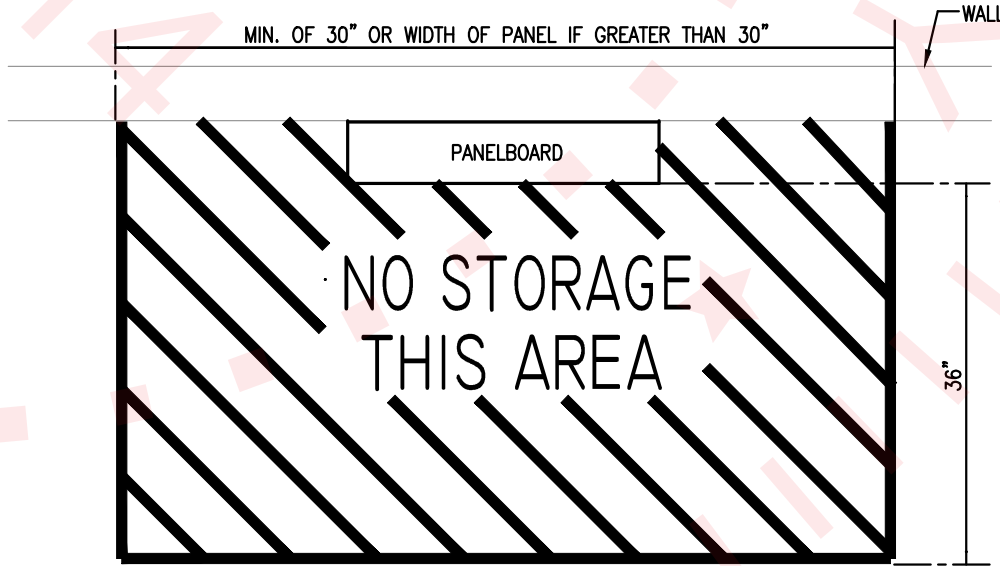

TYPICAL CLEARANCE AT ELECTRICAL PANELS
NOT TO SCALE



DAG
ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.
**RENOVATIONS &
NEW CONSTRUCTION**
FOR PANCARE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428




REVISIONS:

No.	Description	Date

POWER RISER


PROJECT NUMBER	23071
DATED	02/05/2024


- PRIOR TO CONSTRUCTION, ELECTRICAL CONTRACTOR SHALL COORDINATE WITH OWNER-SELECTED SECURITY AND A/C CONTRACTORS FOR REQUIRED RACEWAYS/BACKBOXES/JUNCTION BOXES, ETC...
 - PRIOR TO CONSTRUCTION, ELECTRICAL CONTRACTOR SHALL COORDINATE WITH DENTAL EQUIPMENT VENDOR/DRAWINGS ALL REQUIRED REQUIRED RACEWAYS, JUNCTIONS BOXES, AND POWER/LV CONTROL FOR VENDOR FURNISHED DENTAL EQUIPMENT. PRIOR TO BID, ELECTRICAL CONTRACTOR SHALL PROVIDE A COPY OF ALL DENTAL EQUIPMENT DRAWINGS FROM GC/ARCHITECT FOR COORDINATION AND DETAILS. NOT ALL RACEWAYS, J-BOXES, CONTROL WIRING, ETC... REQUIRED FOR DENTAL EQUIPMENT.
 - REDUNDANT GROUNDING SHALL BE PROVIDED IN ALL PATIENT CARE AREAS AND EXAM ROOMS. REFER TO NEC 517.13 FOR ALL LOCATIONS REQUIRED AND ACCEPTABLE METHODS OF GROUNDING. "MC" CABLE MAY BE USED IN APPLICABLE AREAS PER APPROVAL. IN EXISTING AREAS THAT REQUIRE REDUNDANT GROUNDING, EC SHALL PROVIDE REDUNDANT GROUNDING WHERE REQUIRED PER NEC.



SCALE: 3/16" = 1'-0"

- ② EXISTING PANEL TO BE REUSED.
- ② INSTALL GFCI QUADRAPLEX RECEPTACLE FLUSH IN FLOOR FOR UTILITIES AND MOTORIZED EXAM CHAIR. FURNISH BRASS COVERPLATE AND ALL ACCESSORIES FOR A COMPLETE INSTALLATION. SEE SHEET 'DB110' FOR DETAILS.
- ③ INSTALL 1-GANG JUNCTION BOX IN FLOOR FOR CONSOLE-MOUNTED INTRAORAL X-RAY EQUIPMENT. FURNISH COVERPLATE AND ALL ACCESSORIES FOR A COMPLETE INSTALLATION. PRIOR TO ROUGH-IN, VERIFY THAT EQUIPMENT IS TO BE INSTALLED AND COORDINATE EXACT LOCATION AND BOX.
- ④ INSTALL 1-GANG JUNCTION BOX IN FLOOR FOR CONSOLE EQUIPMENT. PRIOR TO ROUGH-IN, FIELD-VERIFY EXACT LOCATION WITH GC/OWNER. SEE SHEET 'DB110' FOR DETAILS. EC SHALL INSTALL ONE (1) 1" (W/PULLSTRING) FOR TELE/DATA CABLING. CONDUIT TO BE TERMINATED IN ACCESSIBLE LOCATION ABOVE CEILING.
- ③ EC SHALL INSTALL 2-GANG FLOOR BOX WITH TELE/DATA & DUPLEX RECEPTACLE; FURNISH WITH BRASS COPPERPLATE AND ALL ACCESSORIES FOR A COMPLETE INSTALLATION. PRIOR TO ROUGH-IN, VERIFY LOCATION WITH GC. SEE SHEET 'DB110' FOR DETAILS.
- ③ INSTALL FLOOR BOX PER DENTAL DRAWING REQUIREMENTS. REFER TO DENTAL DRAWINGS FOR ALL REQUIREMENTS FOR A COMPLETE INSTALLATION. PRIOR TO ROUGH-IN, VERIFY EXACT LOCATION WITH GC/OWNER.
- ⑦ EC SHALL INSTALL 2#10, 1#10GND IN 3/4" CONDUIT.
- ③ PRIOR TO ROUGH-IN, EC TO FIELD-VERIFY EXACT LOCATION/HEIGHT OF DEVICES FOR TV WITH GC/AV CONTRACTOR.
- ③ INSTALL 2-GANG JUNCTION BOX IN FLOOR FOR CONSOLE EQUIPMENT. FURNISH COVERPLATE AND ALL ACCESSORIES FOR A COMPLETE INSTALLATION. PRIOR TO ROUGH-IN, COORDINATE EXACT LOCATION AND BOX REQUIRED IN FIELD WITH DENTAL EQUIPMENT SUPPLIER/GC. COORDINATE REQUIRED CUT-N-PATCH OF EXISTING FLOOR WITH GC PRIOR TO CONSTRUCTION.
- ① DURING DEMOLITION PHASE, EC TO IDENTIFY WHICH BREAKERS ARE TO HAVE NO LOAD REMAINING. CONNECT NEW HOMERUN TO 20/1 BREAKER IN IN PANEL 'P1' SECTION 1 OR SECTION 2. IF NO BREAKER IS AVAILABLE, INSTALL 20/1 BREAKER IN PANEL 'P1' SECTION 1 OR SECTION 2 AND CONNECT HOMERUN TO IT.
- ① DURING DEMOLITION PHASE, EC TO IDENTIFY WHICH BREAKERS ARE TO HAVE NO LOAD REMAINING. CONNECT NEW HOMERUN TO 20/1 BREAKER IN IN PANEL 'EP'. IF NO BREAKER IS AVAILABLE, INSTALL 20/1 BREAKER IN PANEL 'EP' AND CONNECT HOMERUN TO IT.
- ⑦ COORDINATE WITH GC FOR EXACT MOUNTING LOCATION ABOVE CEILING FOR AIR HANDLING UNIT DISCONNECT.
- ③ EX MSAH-3 IS POWERED BY EX MSAC-3. EC TO INSTALL 2#12, 1#12GND IN 3/4" BETWEEN INDOOR AND OUTDOOR UNIT.
- ③ EX MSAH-4 IS POWERED BY EX MSAC-4. EC TO INSTALL 2#12, 1#12GND IN 3/4" BETWEEN INDOOR AND OUTDOOR UNIT.
- ③ PER MECHANICAL DESIGN, EXISTING MINI-SPLIT TO BE RELOCATED WHERE SHOWN. EC TO FIELD-VERIFY EXACT BREAKER SERVING MECHANICAL UNIT AND REMOVE CIRCUIT BACK PANEL SERVING UNIT. EC TO INSTALL 2#12, 1#12GND IN 3/4" CONDUIT TO NEW 30/2/3R DISCONNECT FOR RECONNECTION TO EXISTING MINI-SPLIT IN NEW LOCATION.
- ③ EC SHALL INSTALL 3#6, 1#6GND IN 1" CONDUIT.
- ⑦ EXISTING MECHANICAL UNIT IS PROTECTED BY 30/3 BREAKER IN EXISTING PANEL 'MP' SPACES 13/15/17. EC TO FURNISH/INSTALL NEW 45/3 HACR BREAKER IN SPACED 7/9/11 AND CONNECT TO NEW 3#8,1#10GND IN 3/4" CIRCUIT FOR NEW 'ODHP-1'. THE EXISTING 30/3 BREAKER AND CIRCUIT TO BE CONNECTED TO EXISTING 'MSAC-1' VIA NEW 30/2/3R (FUSED 20A) DISCONNECT.
- ③ PER MECHANICAL DESIGN, EXISTING MECHANICAL UNIT 'IDHP-1' TO BE REMOVED AND REPLACED BY OTHERS. EC TO REMOVE EXISTING CIRCUIT BACK TO PANEL SERVING UNIT AND RELABEL EXISTING BREAKER AS 'SPARE'. EC TO INSTALL 2#6, 1#10GND IN 1" CONDUIT AND NEW 60/2 HACR BREAKER IN EXISTING PANEL 'MP' FOR NEW MECHANICAL UNIT 'IDHP-1'.
- ③ EC SHALL INSTALL 2#6, 1#10GND IN 1" CONDUIT.
- ③ PER MECHANICAL DESIGN, EX MSAH-2 TO BE RELOCATED BY OTHERS WHERE SHOWN. EX MSAH-2 IS POWERED BY EX MSAC-2. EC TO INSTALL 2#12, 1#12GND IN 3/4" BETWEEN INDOOR AND OUTDOOR UNIT.
- ⑦ EC TO FIELD-VERIFY IF EXISTING FEEDER IS INSTALLED OVERHEAD OR UNDERGROUND. IF OVERHEAD, EXISTING FEEDER MAY BE RE-ROUTED TO NEW LOCATION OF PANEL 'EP'. IF UNDERGROUND, INSTALL NEW FEEDER AS SHOWN IN 'POWER RISER DRAWING'.



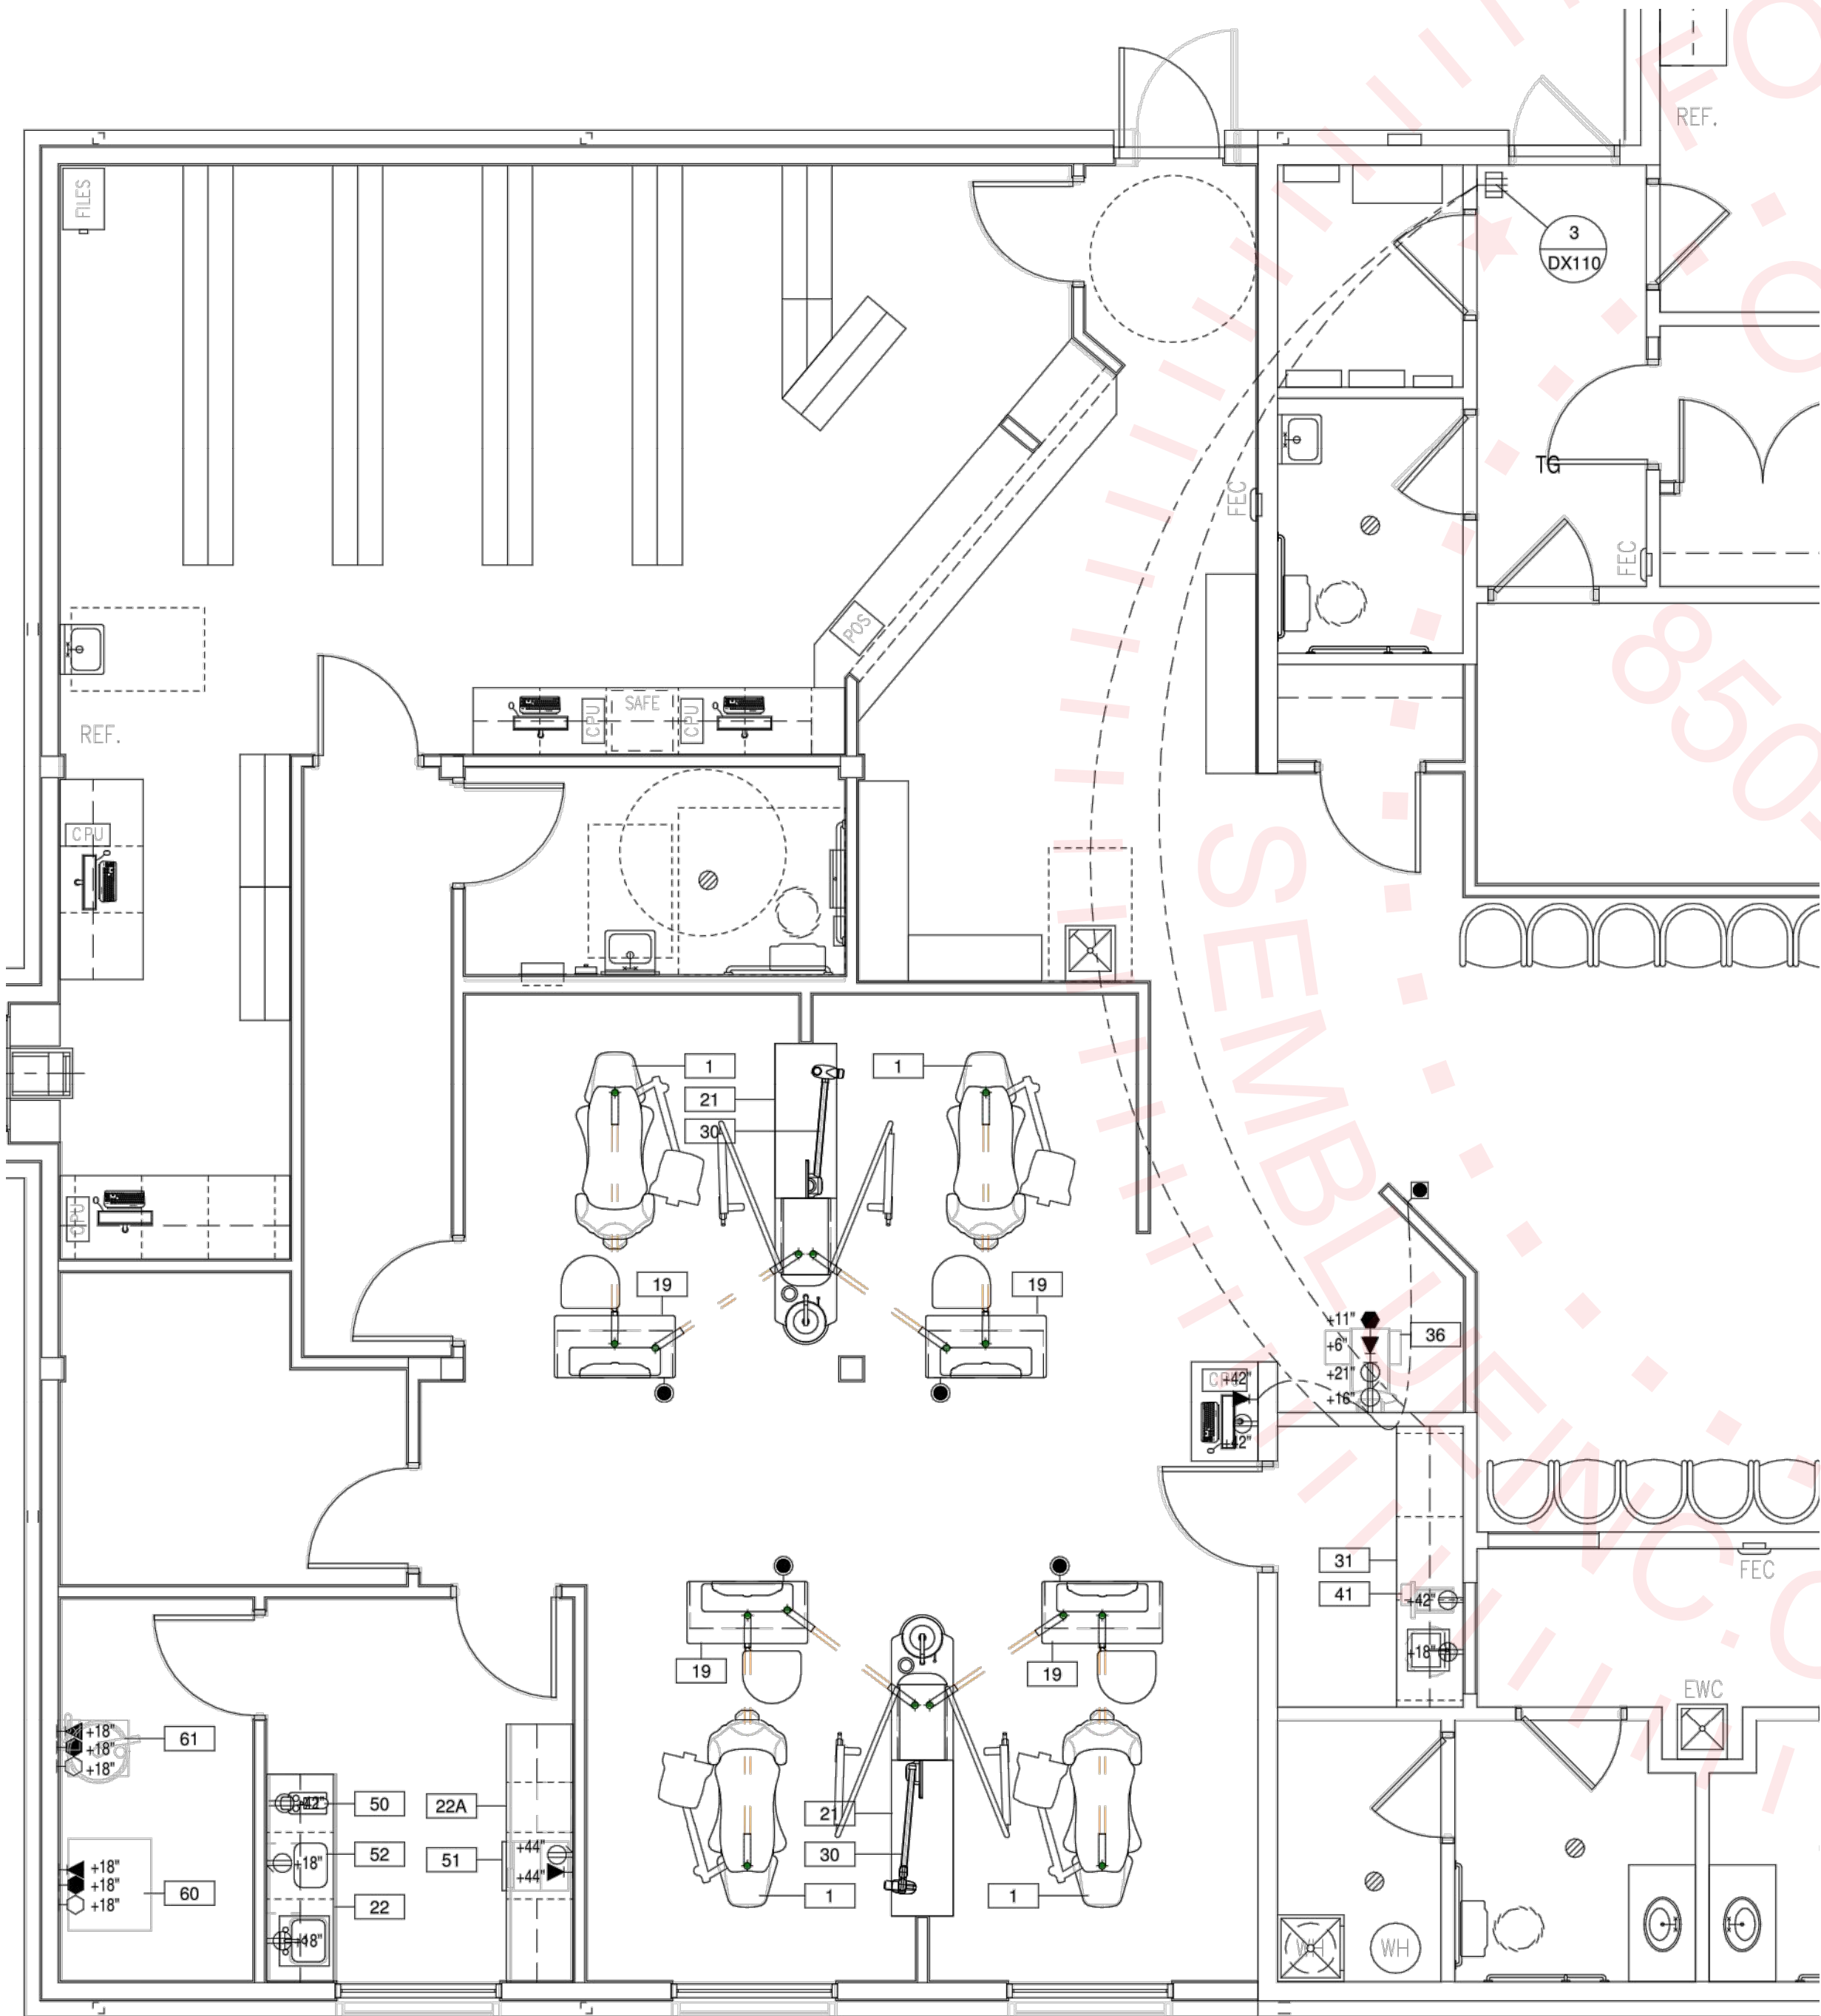

DENTAL EQUIPMENT PLAN - NEW WORK

SCALE: N.T.S.

GENERAL NOTES																			
ALL DEVICES ARE TO BE INSTALLED PER STATE AND LOCAL CODES.																			
EQUIPMENT INFO					ELECTRICAL INFO										LOW VOLTAGE INFO				
QTY	ITEM #	DESCRIPTION	STATUS	CONNECTION BY	VOLTS	AMPS	POWER	CONNECTION TYPE	ELECTRICAL REMARKS	LV CONNECTION BY	3/4" EMPTY CONDUIT	1" EMPTY CONDUIT	183 WIRE	184 WIRE	JBOK LV	CATS6 OR BETTER	MFG CABLE	MONITOR CABLE	LV REMARKS
4	1	DENTAL CHAIR	NW	EC	120v	7.0													
4	19	REAR CABINET	NW	EC	120v	20.0	*		EC TO LEAVE MIN 3" FLEXIBLE CONDUIT	EC	*	*	*		*				RUN LOW VOLTAGE WIRES AND OR CABLES TO LOCATIONS INDICATED ON PLANS
2	21	CENTRAL CABINET	NW	EC	120v	20.0	*	*	EC TO LEAVE MIN 3" FLEXIBLE CONDUIT	EC	*	*	*		*				RUN LOW VOLTAGE WIRES AND OR CABLES TO LOCATIONS INDICATED ON PLANS
1	22	STERILIZATION CABINET	NW	EC	120v	20.0	*	*	EC TO LEAVE MIN 3" FLEXIBLE CONDUIT	EC	*	*	*		*				RUN LOW VOLTAGE WIRES AND OR CABLES TO LOCATIONS INDICATED ON PLANS
1	22A	STERILIZATION CABINET CLEAN	NW	EC	120v	20.0	*	*	EC TO LEAVE MIN 3" FLEXIBLE CONDUIT	EC	*	*	*		*				RUN LOW VOLTAGE WIRES AND OR CABLES TO LOCATIONS INDICATED ON PLANS
2	30	INTRADURAL X-RAY	NW	EC	120v	20.0	*	*		EC	*	*	*		*				
1	31	LAB CABINETS	NW	EC	120v	20.0	*	*	GC PROVIDED CABINET. ALL UTILITY LOCATIONS FOR DENTAL EQUIPMENT TO BE COORDINATED BY GC. VERIFY LOCATIONS WITH CABINET MFG. OWNER, AND PATTERSON EQUIPMENT SPECIALIST.	EC									GC PROVIDED CABINET. ALL UTILITY LOCATIONS FOR DENTAL EQUIPMENT TO BE COORDINATED BY GC. VERIFY LOCATIONS WITH CABINET MFG. OWNER, AND PATTERSON EQUIPMENT SPECIALIST.
1	36	DIGITAL PAN	NW	EC	120v	20.0	*	*		EC	*	*	*		*				
1	41	MODEL TRIMMER	NW	EC	120v	10.0	*	*		EC	*	*	*		*				
1	51	STERILIZER	NW	EC	120v	12.0	*	*	DEDICATED POWER	EC									
1	52	ULTRASONIC CLEANER	NW	EC	120v	2.0	*	*		EC									
1	60	COMPRESSOR	NW	EC	220v	20.0	*	*	DEDICATED POWER. IF SERVICE IS ABOVE OR BELOW VOLT AGE INDICATED IN STALL A BUCK/BOOST TRANSFORMER AS REQUIRED, COORDINATE WITH EQUIPMENT SPECIALIST.	EC	*	*	*		*				
1	61	DRY VACUUM SYSTEM	NW	EC	208-230v	11.4	*	*	UNIT REQUIRES MIN 20.0 AMP BREAKER. UNIT REQUIRES THERMOSTATICALLY OPERATED EXHAUST FAN (CONTINUOUS RUN) @ 800 CFM TO MAINTAIN ROOM TEMPERATURE BETWEEN 40 AND 104 DEGREES.	EC	*	*	*		*				

ELECTRICAL SYMBOLS

ALL DEVICES SHALL BE INSTALLED PER STATE AND LOCAL CODE.
ALL LOCATIONS SHOULD BE VERIFIED WITH PATTERSON REP OR OWNER PRIOR TO PLACEMENT.

+XX" - INDICATES HEIGHT FROM FINISHED FLOOR TO CENTER OF DEVICE UNLESS OTHERWISE NOTED BELOW, IF ITEM NOT TAGGED HEIGHT IS 18" A.F.F.

QTY.	SYM.	DESCRIPTION	PSDI_Vent And Exhaust Remarks	PSDI_Exhaust Comments
3	⌚	120v DUPLEX DEDICATED OUTLET WALL, IF TAG NOT PRESENT HEIGHT IS 18" A.F.F. TO CENTER OF DEVICE		
3	⌚	120v FLUSH DUPLEX OUTLET WALL, IF TAG NOT PRESENT HEIGHT IS 18" A.F.F. TO CENTER OF DEVICE		
2	⌚	120v QUAD OUTLET WALL, IF TAG NOT PRESENT HEIGHT IS 18" A.F.F. TO CENTER OF DEVICE		
1	⌚	220v SINGLE OUTLET WALL, IF TAG NOT PRESENT HEIGHT IS 18" A.F.F. TO CENTER OF DEVICE		
2	⌚	J-BOX WALL, IF TAG NOT PRESENT HEIGHT IS 18" A.F.F. TO CENTER OF DEVICE		

LOW VOLTAGE SYMBOLS

ALL DEVICES SHALL BE INSTALLED PER STATE AND LOCAL CODE. ALL LOCATIONS SHOULD BE VERIFIED WITH PATTERSON REP OR OWNER PRIOR TO PLACEMENT.

+XX" - INDICATES HEIGHT FROM FINISHED FLOOR TO CENTER OF DEVICE UNLESS OTHERWISE NOTED BELOW, IF ITEM NOT TAGGED HEIGHT IS 18" A.F.F.		
QTY.	SYM.	DESCRIPTION
		DATA DEVICE WALL MOUNTED
4		DATA DEVICE WALL, IF TAG NOT PRESENT HEIGHT IS 18" A.F.F.
3		J-BOX WALL LOW VOLTAGE, IF TAG NOT PRESENT HEIGHT IS 18" A.F.F.
1		MASTER SWITCH WALL, IF TAG NOT PRESENT HEIGHT IS 60" A.F.F. TO CENTER
1		REMOTE PANEL SWITCH WALL, IF TAG NOT PRESENT HEIGHT IS 60" A.F.F.
4		REMOATE X-RAY SWITCH IN CABINET, IF TAG NOT PRESENT HEIGHT IS 60" A.F.F.

ELECTRICAL LEGEND

	18/3 WIRE, CABLE RUN IN WALLS OR ABOVE FINISHED CEILING
	1/4 WIRE, CABLE RUN IN WALLS OR ABOVE FINISHED CEILING
	CAT5e OR BETTER CABLE, CABLE RUN IN WALLS OR ABOVE FINISHED CEILING
	MANUFACTURER CABLE, CABLE RUN IN WALLS OR ABOVE FINISHED CEILING
	ELECTRICAL CONDUIT UNDER FLOOR, SIZE AS INDICATED ON PLAN
	ELECTRICAL CONDUIT ABOVE CEILING, SIZE AS INDICATED ON PLAN

GENERAL NOTE(S) FOR ELECTRICAL CONTRACTOR:

THIS SHEET IS SUPPLEMENTAL TO "E-100" TO DENOTE ADD'L CLARIFICATION OF DENTAL VENDOR REQUIREMENTS. A COMPLETE SET OF DENTAL DRAWINGS (W/ DETAILS) WAS UNAVAILABLE DURING DESIGN.

REQUIRED RACEWAYS/BACKBOXES/JUNCTION BOXES, ETC....

PRIOR TO CONSTRUCTION, ELECTRICAL CONTRACTOR SHALL COORDINATE WITH DENTAL EQUIPMENT VENDOR/DRAWINGS ALL REQUIRED REQUIRED RACEWAYS, JUNCTIONS BOXES, AND POWER/LV CONTROL FOR VENDOR FURNISHED DENTAL EQUIPMENT. PRIOR TO BID, ELECTRICAL CONTRACTOR SHALL ACQUIRE A COMPLETE SET OF DENTAL EQUIPMENT DRAWINGS FROM GC/ARCHITECT FOR COORDINATION AND DETAILS. NOT ALL RACEWAYS, J-BOXES, CONTROL WIRING, ETC., REQUIRED FOR DENTAL EQUIPMENT.

-REDUNDANT GROUNDING SHALL BE PROVIDED IN ALL PATIENT CARE AREAS AND EXAM ROOMS. REFER TO NEC 517.13 FOR ALL LOCATIONS REQUIRED AND ACCEPTABLE METHODS OF GROUNDING. "MC" CABLE MAY BE USED IN APPLICABLE AREAS PER APPROVAL.

IN EXISTING AREAS THAT REQUIRE REDUNDANT GROUNDING, EC SHALL PROVIDE REDUNDANT GROUNDING WHERE REQUIRED PER NEC.



Florida CA Number: 27825
Anthony L Davis, PE
Florida License Number: 57419
850.526.3447
Project Number: 2023-091
Checked By: ALD
Drawn By: KEF

DAG

ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite I Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.

RENOVATIONS & NEW CONSTRUCTION FOR PANCARE CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS

[illegible]


DENTAL PLAN & DETAILS - NEW WORK

PROJECT NUMBER	23071
DATED	02/05/2024


E101

© 2021 DAG ARCHITECTS, INC. ALL RIGHTS RESERVED. NO PART OF THIS DOCUMENT MAY BE COPIED, REPRODUCED OR TRANSMITTED BY ANY MEANS WITHOUT WRITTEN PERMISSION OF DAG ARCHITECTS, INC. THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY AND COPYRIGHT OF DAG ARCHITECTS, INC. AND SHALL NOT BE USED ON ANY OTHER PROJECT OR LOCATION EXCEPT AS DESCRIBED ON THE DRAWINGS, WITHOUT THE PRIOR WRITTEN AGREEMENT OF DAG ARCHITECTS.


23071
PRELIMINARY REVIEW SET
09/01/2023

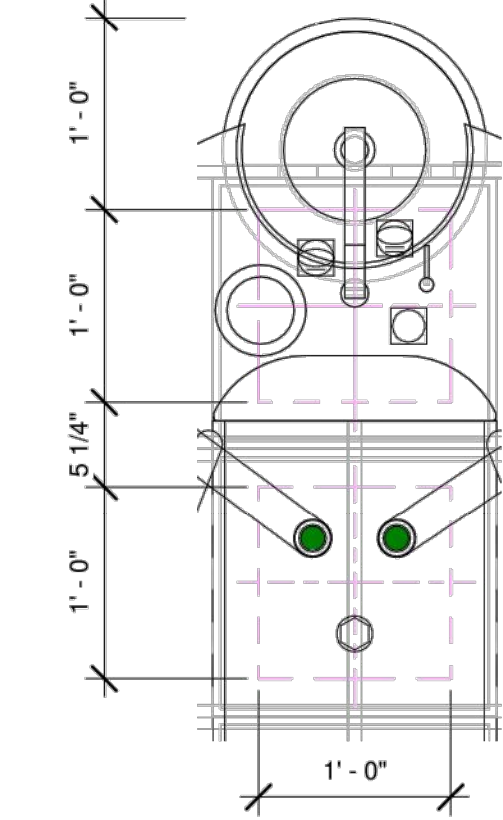


④ ENLARGED CENTRAL CABINET UTILITY ITEM #21
1" = 1'-0"

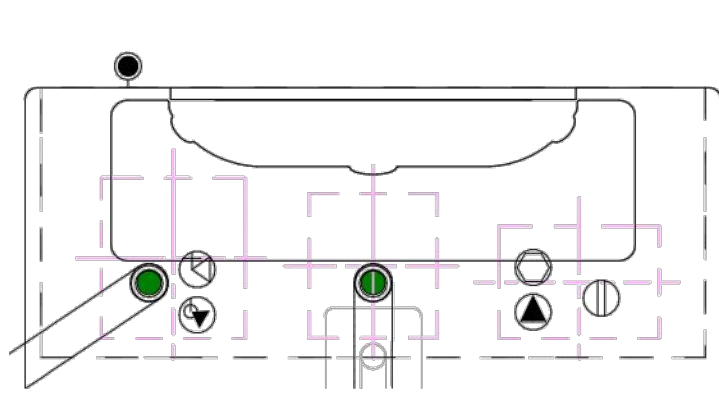

③ ENLARGED REAR TREATMENT UTILITY ITEM #19
1" = 1'-0"

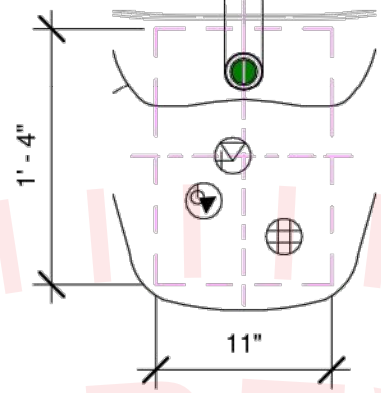

② ENLARGED CHAIR UTILITY ITEM #1
1" = 1'-0"

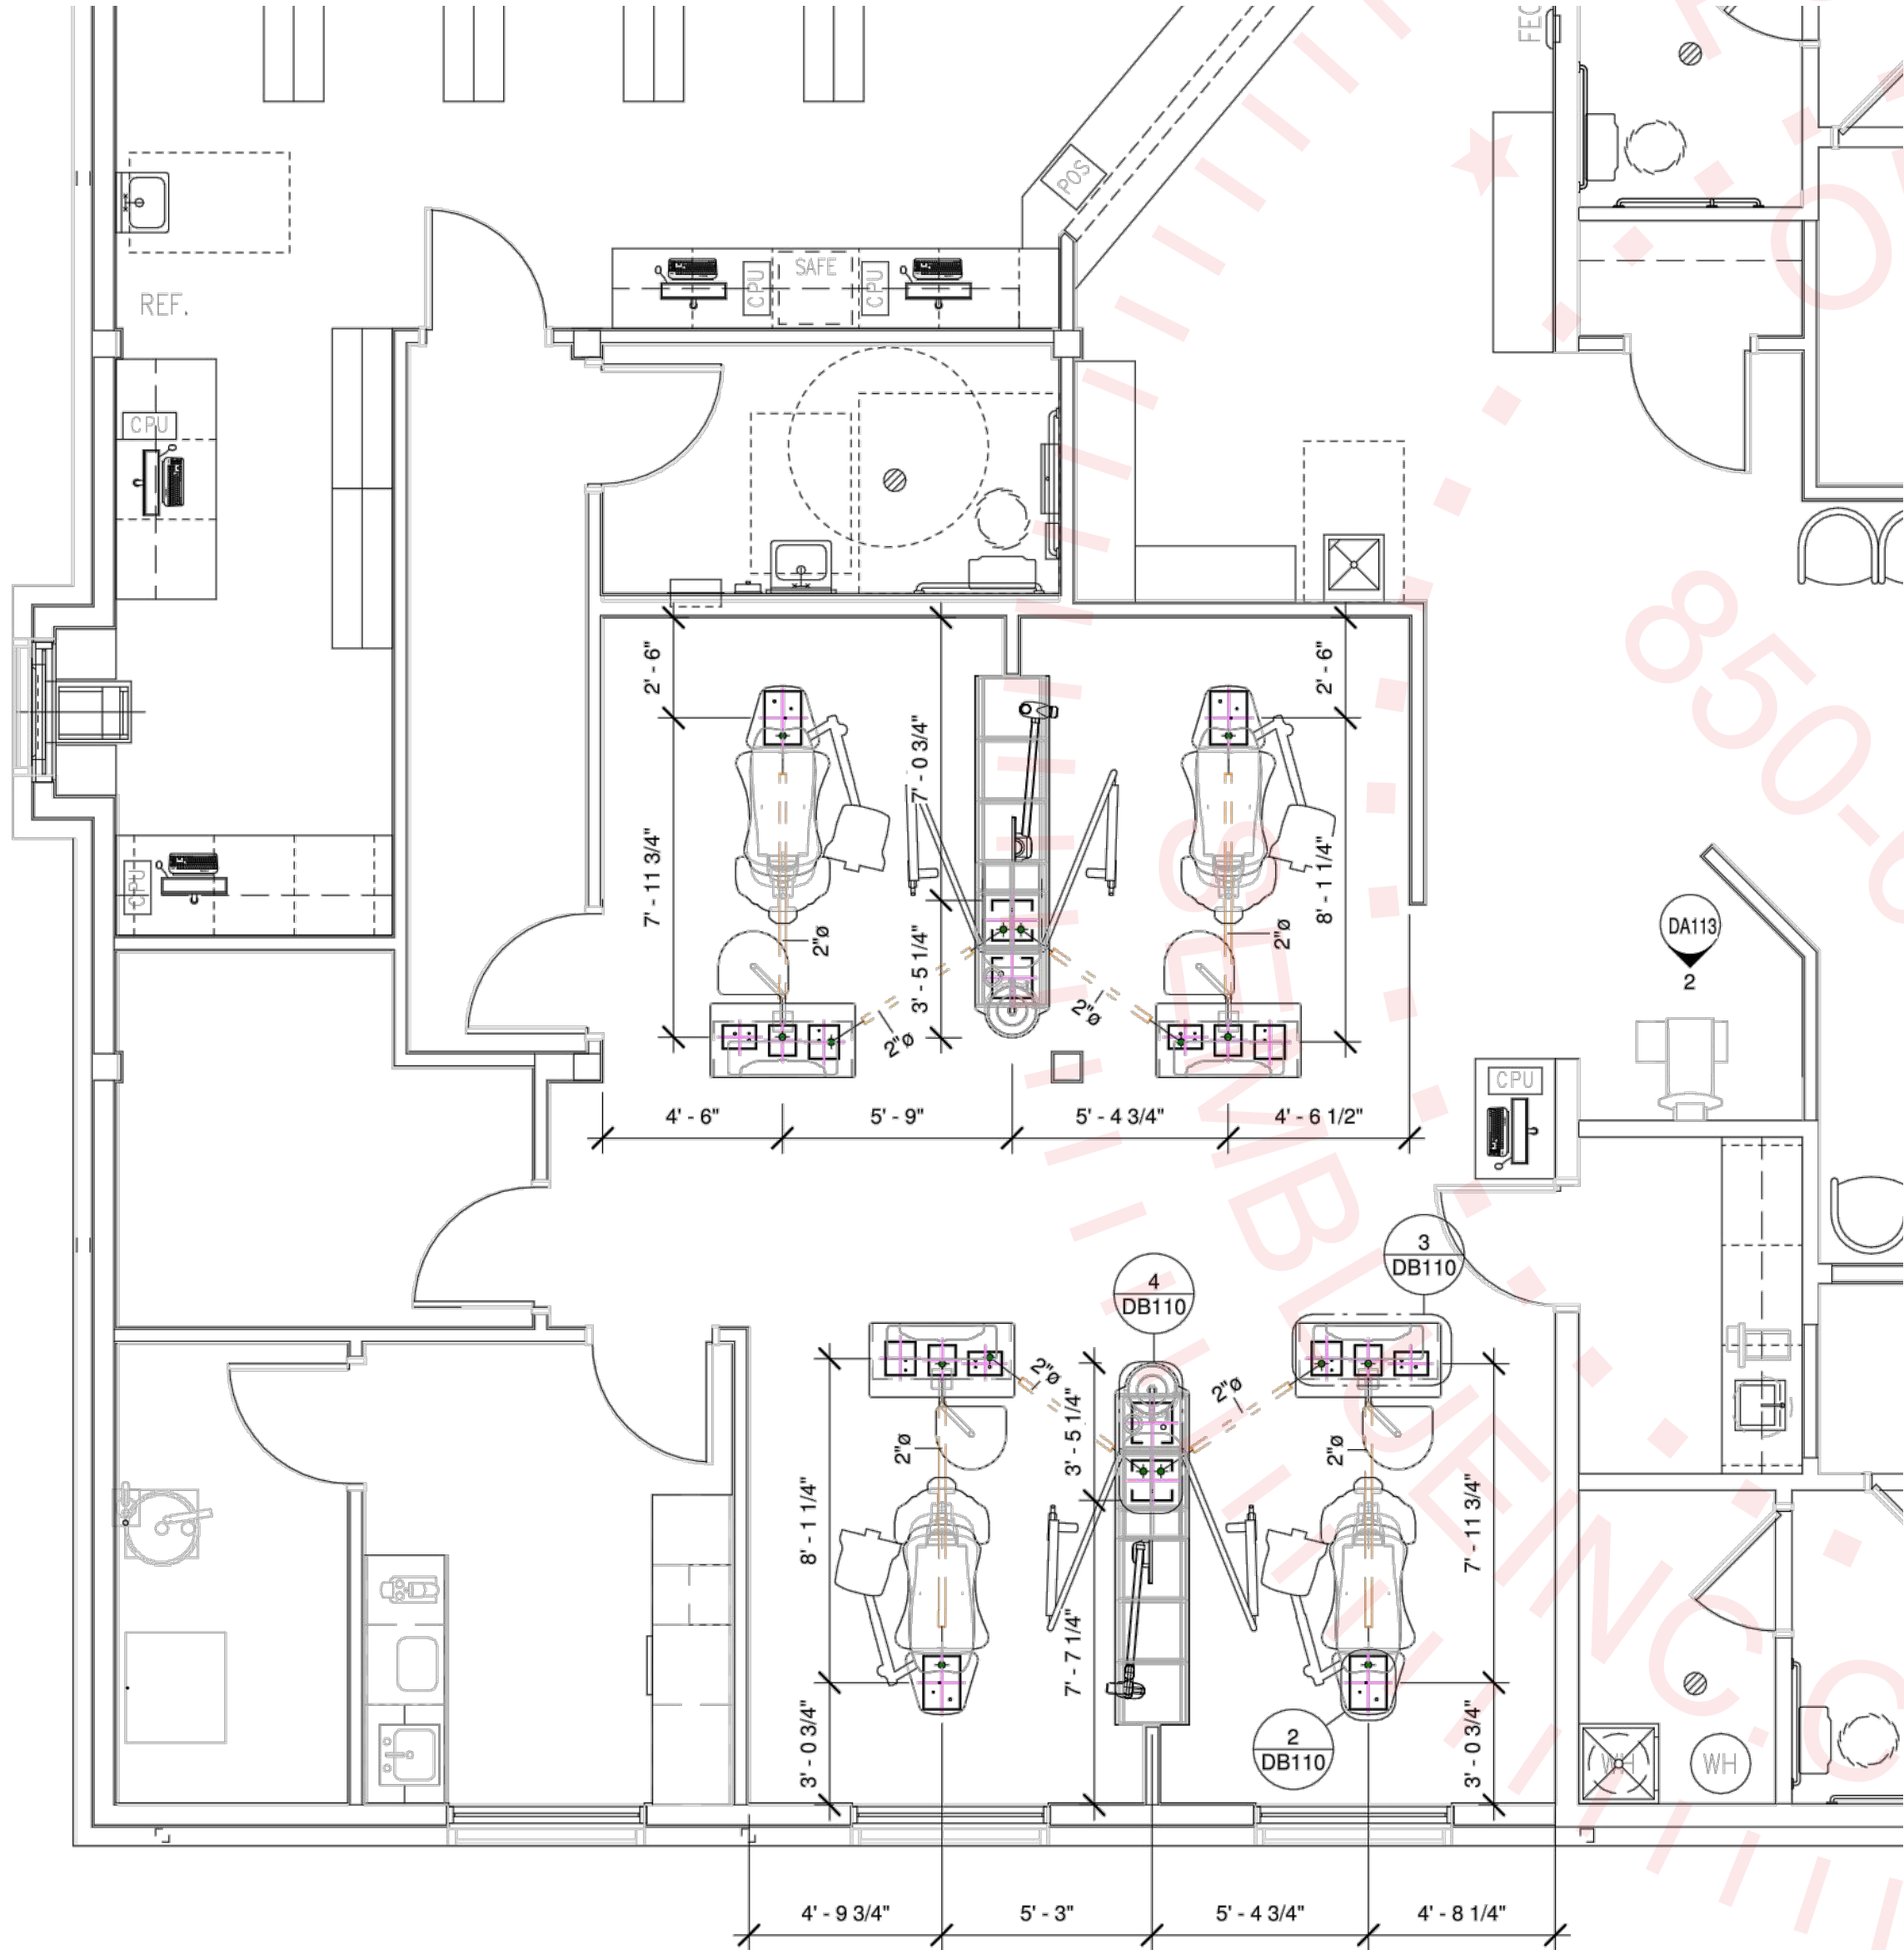

① LVL 1 UNDER FLOOR UTILITY PLAN
1/4" = 1'-0"



DENTAL EQUIPMENT PLAN - NEW WORK

SCALE: N.T.S.

GENERAL NOTE(S) FOR ELECTRICAL CONTRACTOR:
-THIS SHEET IS SUPPLEMENTAL TO "E-100" TO DENOTE ADD'L CLARIFICATION OF DENTAL VENDOR REQUIREMENTS. A COMPLETE SET OF DENTAL DRAWINGS (W/ DETAILS) WAS UNAVAILABLE DURING DESIGN.
REQUIRED RACEWAYS/BACKBOXES/JUNCTION BOXES, ETC...
-PRIOR TO CONSTRUCTION, ELECTRICAL CONTRACTOR SHALL COORDINATE WITH DENTAL EQUIPMENT VENDOR/DRAWINGS ALL REQUIRED REQUIRED RACEWAYS, JUNCTIONS BOXES, AND POWER/LV CONTROL FOR VENDOR FURNISHED DENTAL EQUIPMENT. PRIOR TO BID, ELECTRICAL CONTRACTOR SHALL ACQUIRE A COMPLETE SET OF DENTAL EQUIPMENT DRAWINGS FROM GC/ARCHITECT FOR COORDINATION AND DETAILS. NOT ALL RACEWAYS, J-BOXES, CONTROL WIRING, ETC... REQUIRED FOR DENTAL EQUIPMENT.
-REDUNDANT GROUNDING SHALL BE PROVIDED IN ALL PATIENT CARE AREAS AND EXAM ROOMS. REFER TO NEC 517.13 FOR ALL LOCATIONS REQUIRED AND ACCEPTABLE METHODS OF GROUNDING. "MC" CABLE MAY BE USED IN APPLICABLE AREAS PER APPROVAL. IN EXISTING AREAS THAT REQUIRE REDUNDANT GROUNDING, EC SHALL PROVIDE REDUNANT GROUNDING WHERE REQUIRED PER NEC.

ELECTRICAL SYMBOLS IN FLOOR		
ALL DEVICES SHALL BE INSTALLED PER STATE AND LOCAL CODE. ALL LOCATIONS SHOULD BE VERIFIED WITH PATTERSON REP OR OWNER PRIOR TO PLACEMENT.		
+XX" - INDICATES HEIGHT FROM FINISHED FLOOR TO CENTER OF DEVICE UNLESS OTHERWISE NOTED BELOW, IF ITEM NOT TAGGED HEIGHT IS 18" A.F.F.		
QTY.	SYM.	DESCRIPTION
4	⊕	120v DUPLEX OUTLET FLOOR, IF TAG NOT PRESENT HEIGHT IS 1" A.F.F. TO BOTTOM OF DEVICE
4	⊕	120v QUAD OUTLET FLOOR, MOUNTED ON FLOOR
6	⊕	J-BOX FLOOR, IF TAG NOT PRESENT HEIGHT IS 1" A.F.F.

LOW VOLTAGE SYMBOLS		
ALL DEVICES SHALL BE INSTALLED PER STATE AND LOCAL CODE. ALL LOCATIONS SHOULD BE VERIFIED WITH PATTERSON REP OR OWNER PRIOR TO PLACEMENT.		
+XX" - INDICATES HEIGHT FROM FINISHED FLOOR TO CENTER OF DEVICE UNLESS OTHERWISE NOTED BELOW, IF ITEM NOT TAGGED HEIGHT IS 18" A.F.F.		
QTY.	SYM.	DESCRIPTION
16	⊕	CONDUIT FLOOR STUB OUT, IF TAG NOT PRESENT HEIGHT IS 1" A.F.F.
4	⊕	DATA DEVICE FLOOR, IF TAG IS NOT PRESENT HEIGHT IS 1" A.F.F.

PLUMBING SYMBOLS IN FLOOR		
ALL DEVICES SHALL BE INSTALLED PER STATE AND LOCAL CODES. ALL LOCATIONS SHOULD BE VERIFIED WITH PATTERSON REP OR OWNER PRIOR TO PLACEMENT.		
+XX" - INDICATES HEIGHT FROM FINISHED FLOOR TO CENTER OF DEVICE UNLESS OTHERWISE NOTED BELOW, IF ITEM NOT TAGGED HEIGHT IS 18" A.F.F.		
QTY.	SYM.	DESCRIPTION
9	⊕	1/2" OD. TO 3/8" OD. SHUT OFF AIR CONNECTION FLOOR HEIGHT 3" A.F.F. TO CENTER UNLESS OTHERWISE NOTED
2	⊕	DIRECT DRAIN FLOOR
2	⊕	SHUT OFF VALVE COLD WATER FLOOR
2	⊕	SHUT OFF VALVE HOT WATER FLOOR
8	⊕	VACUUM PIPE CONNECTION FLOOR
1	⊕	VACUUM RISER FLOOR

ELECTRICAL LEGEND	
	18/3 WIRE, CABLE RUN IN WALLS OR ABOVE FINISHED CEILING
	18/4 WIRE, WIRES RUN IN WALLS OR ABOVE FINISHED CEILING
	CAT5e OR BETTER CABLE, CABLE RUN IN WALLS OR ABOVE FINISHED CEILING
	MANUFACTURER CABLE, CABLE RUN IN WALLS OR ABOVE FINISHED CEILING
	ELECTRICAL CONDUIT UNDER FLOOR, SIZE AS INDICATED ON PLAN
	ELECTRICAL CONDUIT ABOVE CEILING, SIZE AS INDICATED ON PLAN



Florida CA Number: 27825
Anthony L. Davis, PE
Florida License Number: 57419
850.526.3447
Project Number: 2023-091
Checked By: ALD
Drawn By: KEF



DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.
**RENOVATIONS &
NEW CONSTRUCTION**
FOR PANCARE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428



REVISIONS:		
No.	Description	Date

DENTAL PLAN & DETAILS - NEW WORK

PROJECT NUMBER	23071
DATED	02/05/2024


E102

GENERAL NOTE(S) FOR ELECTRICAL CONTRACTOR:

-REDUNDANT GROUNDING SHALL BE PROVIDED IN ALL PATIENT CARE AREAS AND EXAM ROOMS. REFER TO NEC 517.13 FOR ALL LOCATIONS REQUIRED AND ACCEPTABLE METHODS OF GROUNDING. 'MC' CABLE MAY BE USED IN APPLICABLE AREAS PER APPROVAL

KEYNOTES:

- ① REFER TO ELECTRICAL LEGEND FOR REQUIRED 0-10V DIMMING CIRCUIT.
- ② FOR SECURITY PURPOSES, FIXTURE TO BE WIRED FOR CONTINUOUS 24 HOUR OPERATION.
- ③ REFER TO 'ELECTRICAL LEGEND' FOR REQUIRED 0-10V 2-WIRE CIRCUIT FOR DIMMING.
- ④ EC SHALL RECONNECT EXISTING EMERGENCY FIXTURE AS SHOWN.
- ⑤ PER MECHANICAL DESIGN, EXHAUST FAN SHALL BE INTERLOCKED WITH LIGHTING FIXTURE SERVING AREA.
- ⑥ EC SHALL COORDINATE WITH MECHANICAL CONTRACTOR TO INTERLOCK EXHAUST FAN WITH HVAC CONTROLS.
- ⑦ DURING DEMOLITION PHASE, EC TO IDENTIFY WHICH BREAKERS ARE TO HAVE NO LOAD REMAINING. CONNECT NEW HOMERUN TO 20/1 BREAKER IN IN PANEL 'EP'.
IF NO BREAKER IS AVAILABLE, INSTALL 20/1 BREAKER IN PANEL 'EP' AND CONNECT HOMERUN TO IT.
- ⑧ EC TO ENSURE EXISTING WALL/SIGN LIGHTING FIXTURES ARE CONNECTED AND OPERATIONAL TO EXTERIOR LIGHTING CIRCUIT.

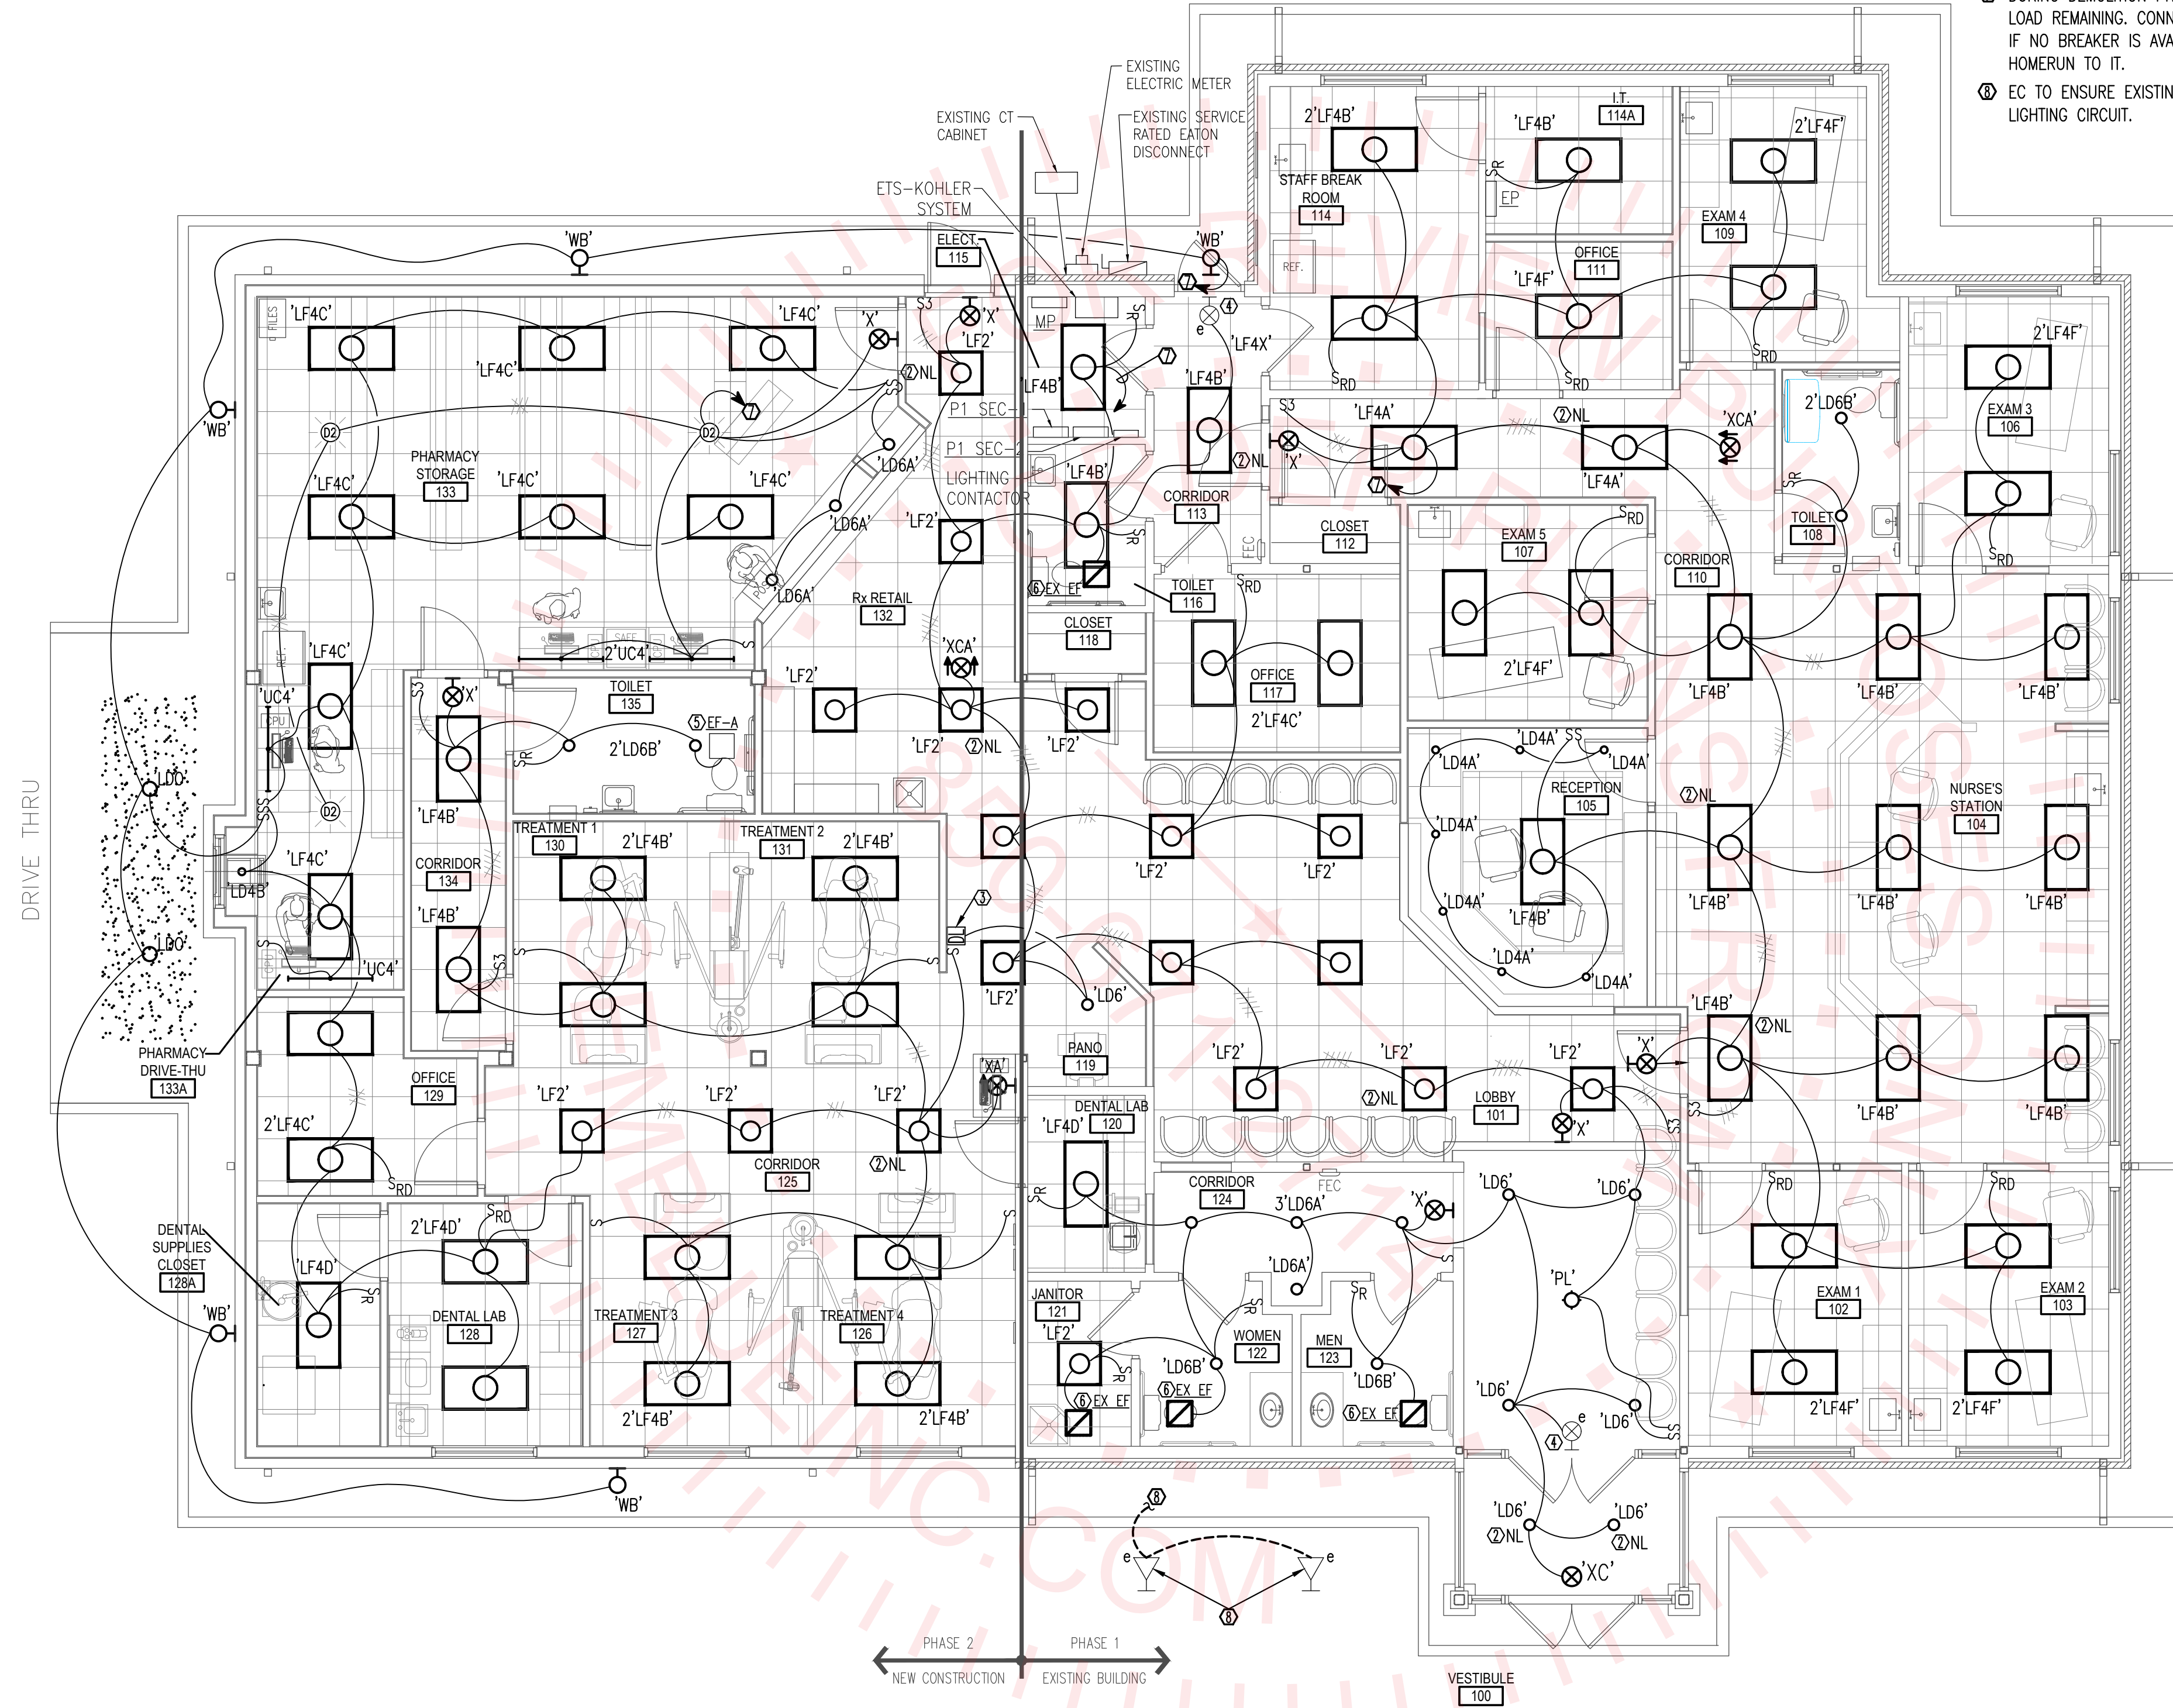

LIGHTING PLAN - NEW WORK

SCALE: 3/16" = 1'-0"



Florida CA Number: 27825
Anthony L Davis, PE
Florida License Number: 57419
850.526.3447
Project Number: 2023-091
Checked By: ALD
Drawn By: KEF

PANCARE OF FLORIDA, INC.

RENOVATIONS & NEW CONSTRUCTION FOR PANCARE CHIPLEY

1440 MAIN ST, CHIPLEY, FL 32428




REVISIONS:

[illegible]

LIGHTING PLAN - NEW WORK

PROJECT NUMBER	23071
DATED	02/05/2024

E200

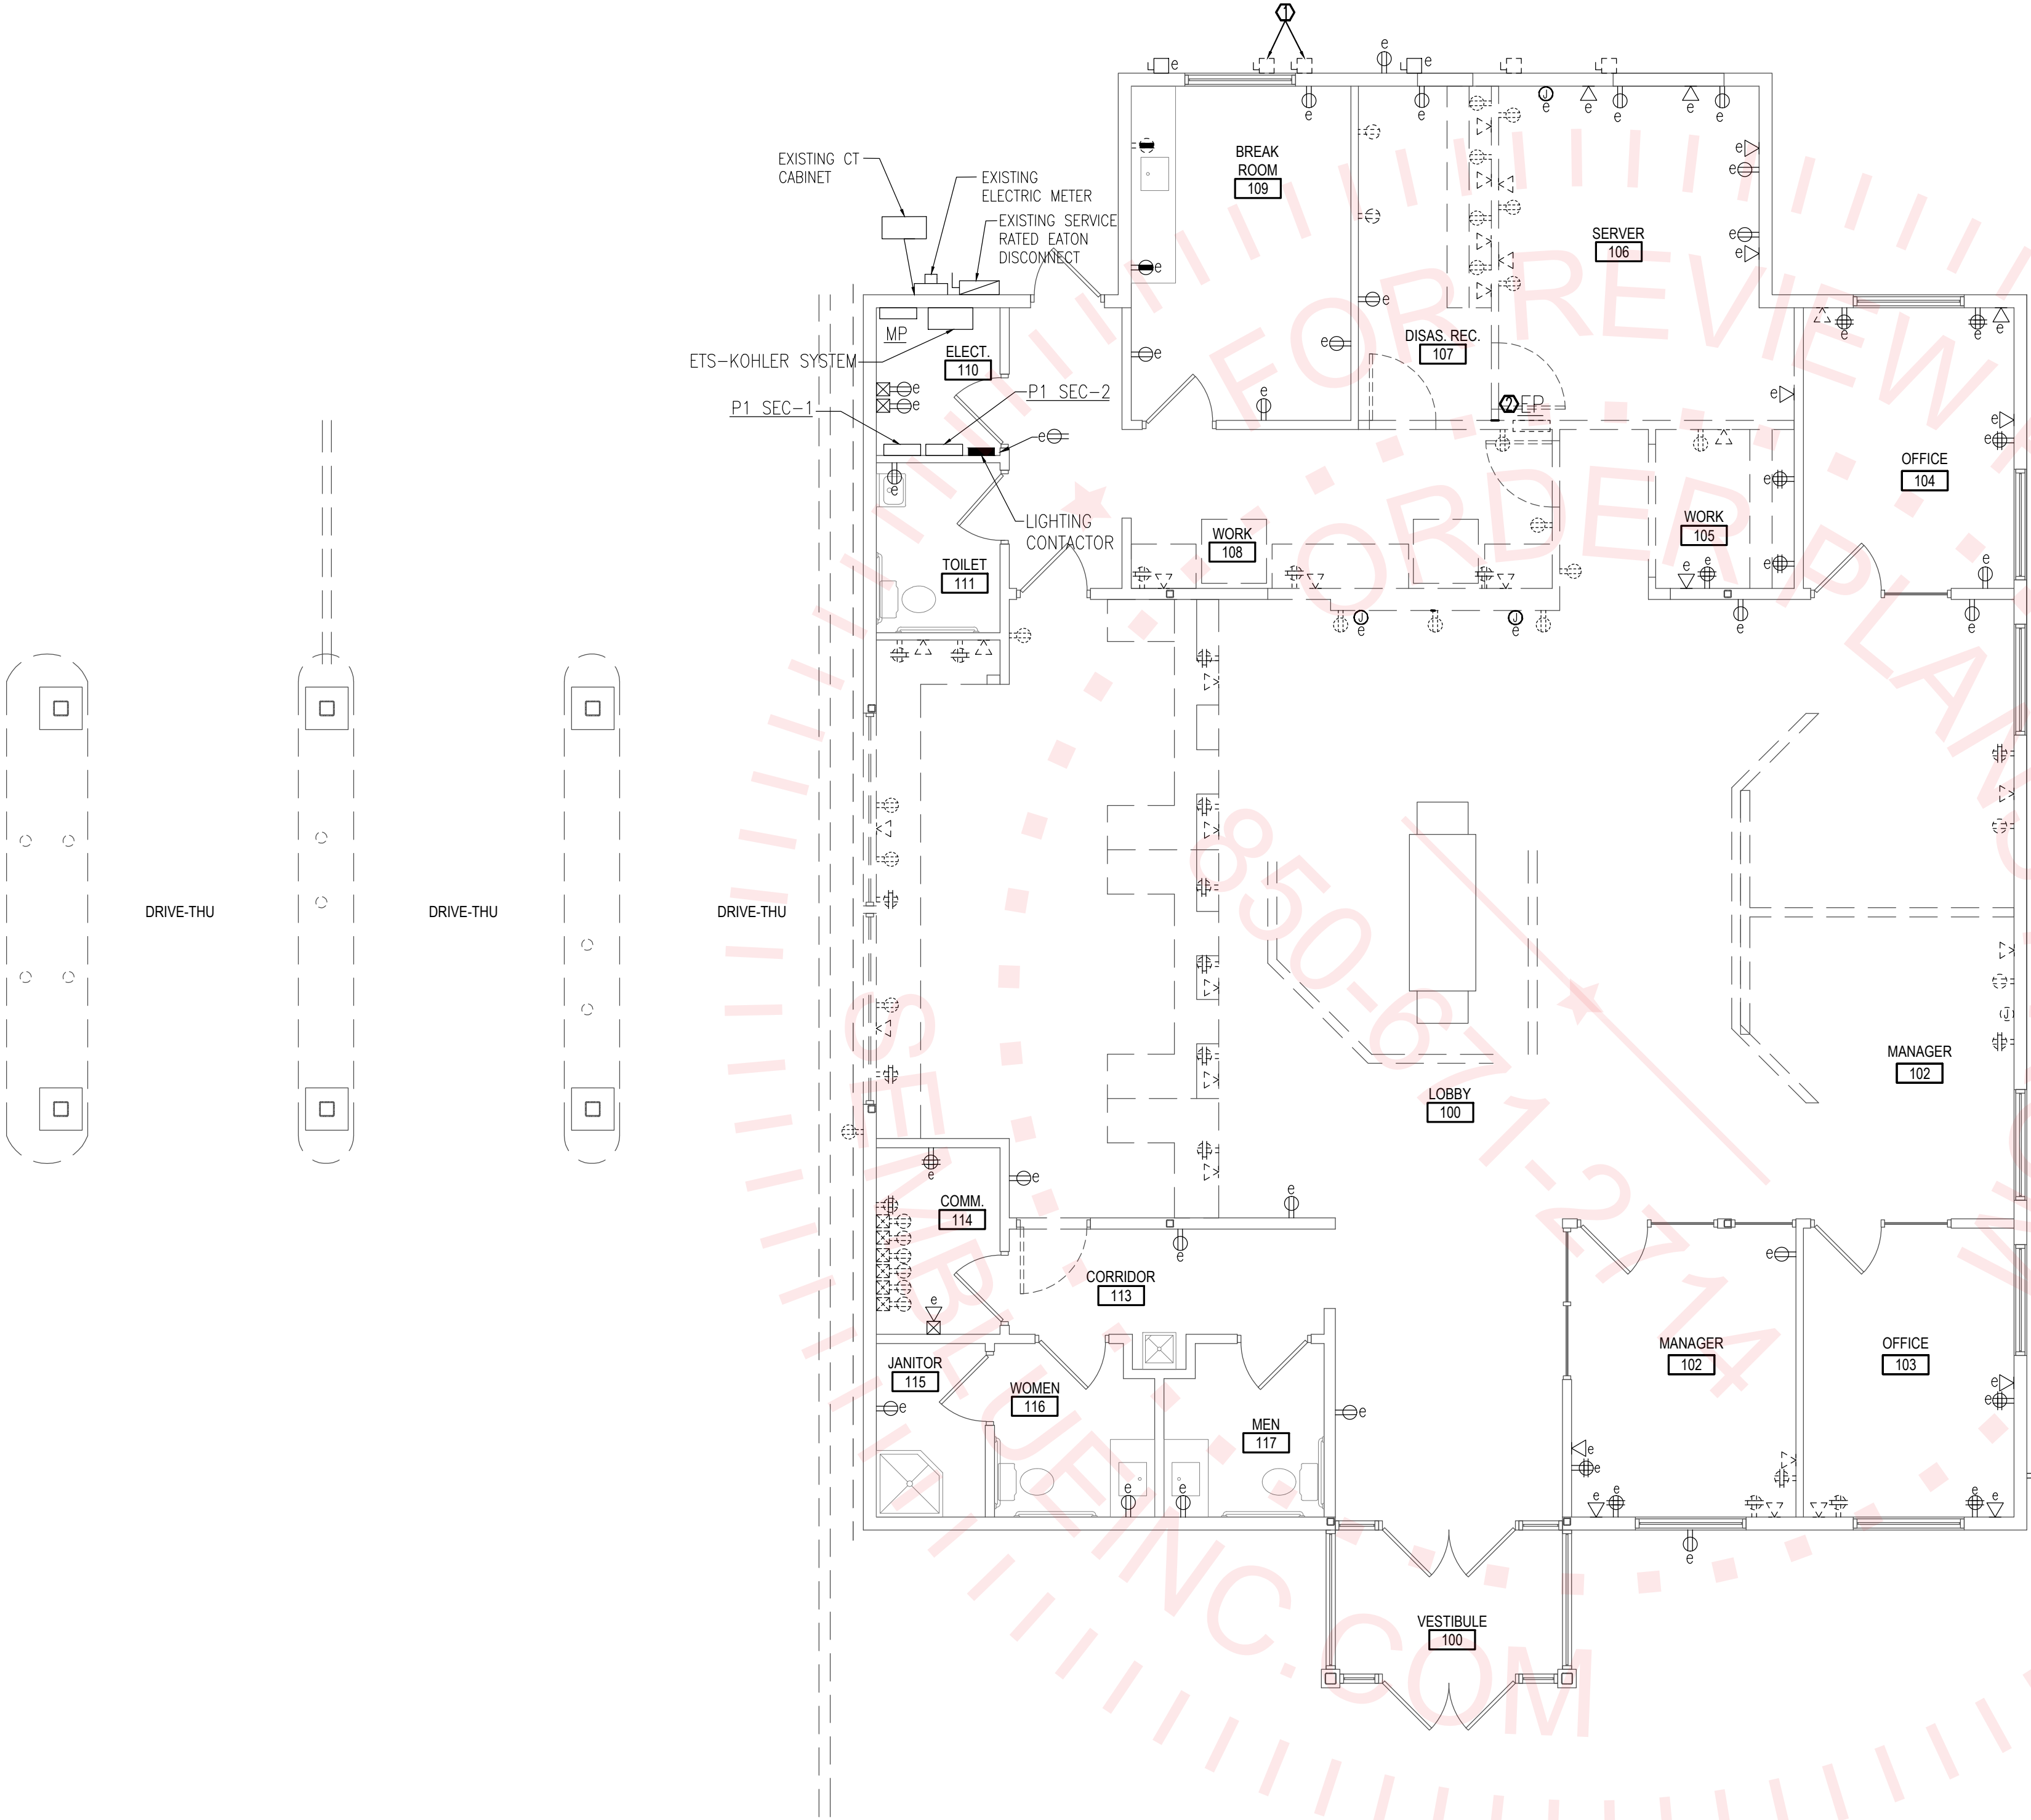

 **1** POWER PLAN - DEMOLITION
ED100 SCALE: 3/16" = 1'-0"

ELECTRICAL DEMOLITION LEGEND (THIS SHEET ONLY)

WALL OUTLETS

-  EXISTING DUPLEX RECEPTACLE TO REMAIN.
-  EXISTING DUPLEX RECEPTACLE TO BE REMOVED.
-  EXISTING COUNTERTOP DUPLEX RECEPTACLE TO REMAIN.
-  EXISTING COUNTERTOP DUPLEX RECEPTACLE TO BE REMOVED.
-  EXISTING SURFACE MOUNTED DUPLEX RECEPTACLE TO REMAIN.
-  EXISTING DUPLEX RECEPTACLE WITH WEATHERPROOF BOX TO REMAIN.
-  EXISTING QUADRAPLEX RECEPTACLE TO REMAIN.
-  EXISTING QUADRAPLEX RECEPTACLE TO BE REMOVED.
-  EXISTING 120V, 30A PLUG WITH WEATHERPROOF BOX TO REMAIN.
-  EXISTING DATA OUTLET TO REMAIN.
-  EXISTING DATA OUTLET TO BE REMOVED.
-  EXISTING JUNCTION BOX TO BE REMAIN.
-  EXISTING DISCONNECT TO REMAIN.

KEYNOTES:

-  EXISTING DISCONNECT FOR 'ODHP-1' PREVIOUSLY CONTAINED FEED-THROUGH CIRCUIT THAT SERVES EXISTING MECHANICAL UNIT 'MSAC-1'. 'ODHP-1' IS TO BE REPLACED WITH A LARGER UNIT. EC TO RECONNECT EXISTING CIRCUIT TO NEW 30/2/3R (FUSED 20A). EXISTING 'MSAC-1' TO BE RECONNECTED TO NEW DISCONNECT. REFER TO SHEET 'E100' FOR REQUIRED NEW CIRCUIT/DISCONNECT FOR NEW UNIT 'ODHP-1'.
-  EXISTING PANEL 'EP' IS RECESSED IN WALL BEING REMOVED. EC TO NOTE ALL EXISTING CIRCUITS THAT HAVE LOAD AND REMOVE ALL CIRCUITS BACK TO SOURCE. FOR RE-INSTALLATION SEE NEW WORK PLAN SHEET 'E100' FOR MORE INFORMATION.



**WATFORD
ENGINEERING**

4452 Clinton Street Marianna, Florida 32446
311 N. College St. Office 101B Auburn, AL 36830

Florida CA Number: 27825
Anthony L Davis, PE
Florida License Number: 57419
850.526.3447
Project Number: 2023-091
Checked By: ALD
Drawn By: KEF



DAG

ARCHITECTS

DAG Architects AR0009694
455 Harrison Ave Suite 1 Panama City, FL 32401
850.387.1671
www.DAGarchitects.com

BID DOCUMENTS

PANCARE OF FLORIDA, INC.
**RENOVATIONS &
NEW CONSTRUCTION**
FOR PANCARE CHIPLEY
1440 MAIN ST, CHIPLEY, FL 32428




PANCARE
OF FLORIDA, INC.

REVISIONS:		
No.	Description	Date

POWER PLAN -
DEMOLITION

PROJECT NUMBER	23071
DATED	02/05/2024

ED100



ED200 SCALE: 3/16" = 1'-0"

- DAG

BID DOCUMENTS

1440 MAIN ST, CHIPLEY, FL 32428

[illegible]

ED200

