

FSU BELLAMY BUILDING 4TH FLOOR RENOVATION

113 COLLEGIATE LOOP
TALLAHASSEE, FL 32308
FLORIDA STATE UNIVERSITY
NOVEMBER 9, 2023
CONTRACT DOCUMENTS



FSU BELLAMY
BUILDING

19480	Drawn By:	SL
Project Code	Checked By:	DB

9 NOVEMBER 2023

Date

CONTRACT
DOCUMENTS

Revisions

△	
△	
△	
△	
△	
△	
△	

COVER SHEET

Tallahassee	Florida
-------------	---------


CS-1

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308	
Phone 850 224-6301	Fax 850 561-6978

PROJECT DIRECTORY

OWNER FLORIDA STATE UNIVERSITY 969 LEARNING WAY 109 MENDENHALL BLDG A TALLAHASSEE, FL 32306 TEL: 850-644-2370 FAX: 850-644-8921	ARCHITECT BFB&S ARCHITECTS 2074 CENTRE POINTE BLVD, SUITE 200 TALLAHASSEE, FL 32308 TEL: 850-224-6301 www.bfbsa.com	MEP ENGINEER TOMAHAWK ENGINEERING 1940 BUFORD BLVD TALLAHASSEE, FL 32308 TEL: 850-402-3040
--	---	---

PROJECT LOCATION MAP

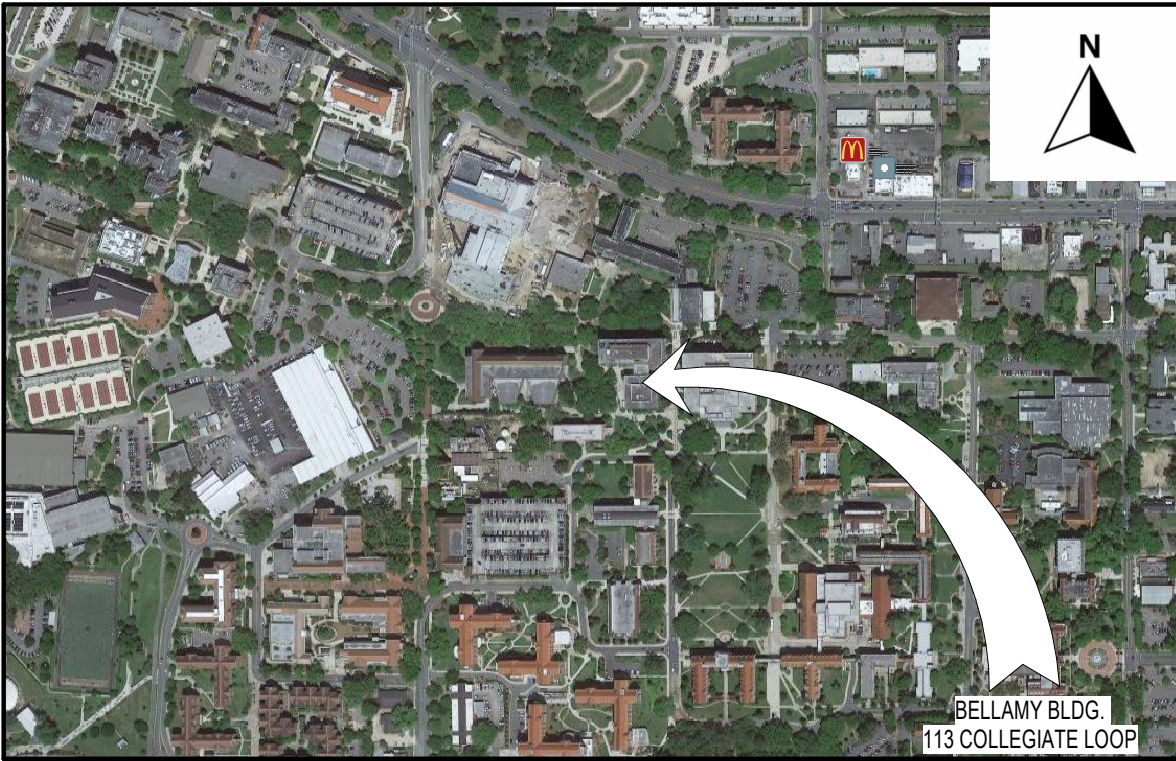

BUILDING SECTION		BUILDING SECTION LETTER
		SECTION NUMBER
		SHEET NUMBER
WALL SECTION		WALL SECTION NUMBER
		SHEET NUMBER
DETAIL		DETAIL NUMBER
		SHEET NUMBER
		DETAIL NUMBER
		SHEET NUMBER
BUILDING ELEVATION		BUILDING ELEVATION LETTER
		SHEET NUMBER
INTERIOR ELEVATION		INTERIOR ELEVATION LETTER
		SHEET NUMBER
		COLUMN LETTER OR NUMBER
Room name		ROOM NAME AND NUMBER
		DOOR NUMBER
		FIRE RATING
		WALL PARTITION TYPE
		WINDOW TYPE (INTERIOR)
		WINDOW TYPE (EXTERIOR)
		CARD READER
		DOOR HOLD OPEN
		FIRE EXTINGUISHER
		CABINET
		FIRE EXTINGUISHER ON BRACKET -

A.C.	AIR CONDITIONED	JCT.	JUNCTION
ACP	ACOUSTICAL PANEL	JT.	JOINT
A.C.T.	ACOUSTICAL TILE	M.	MOTOR
A.F.F.	ABOVE FINISH FLOOR	MAINT.	MAINTENANCE
A.H.U.	AIR HANDLING UNIT	MAX.	MAXIMUM
AJ	ACOUSTICAL JOINT	M.D.P.	MAIN DISTRIBUTION PANEL
AL	ALTERNATE	M.E.C.H.	MECHANICAL
ALUM.	ALUMINUM	MTL.	METAL
AMP_A	AMPERES	MN.	MINIMUM
AN	ANODIZED	MISC.	MISCELLANEOUS
APPROX.	APPROXIMATELY	MO	MASONRY OPENING
	ARCHITECTURAL	MOD.BIT.	MODIFIED BITUMEN
		MR	MOISTURE RESISTANT
B	BOTTOM	M.T.	METAL THRESHOLD
BD.	BOARD	MTD.	MOUNTED
BLDG.	BUILDING	MTG.	MOUNTING
BLK.	BLOCK		
BM.	BEAM	N	NORTH
BAL.	BALANCE	N.A.	NOT APPLICABLE
BRG.	BEARING	N.I.C.	NOT IN CONTRACT
B.T.U.	BRITISH THERMAL UNIT	NO.	NUMBER
		NTS	NOT TO SCALE
C	CONDUIT		
CAB.	CABINET	O.C.	ON CENTER
CAP.	CAPACITY	O.C.E.W.	ON CENTER EACH WAY
C/B	CIRCUIT BREAKER	O.D.	OUTSIDE DIAMETER
C.D.	CEILING DIFFUSER	O.H.	OVERHEAD
CL	CENTER LINE	OPNG.	OPENING
CER.	CERAMIC	OPP.	OPPOSITE
C.F.M.	CUBIC FEET PER MINUTE		
CIRC.	CIRCULATING	P. LAM.	PLASTIC LAMINATE
C.I.	CAST IRON	PART.	PARTITION
CL	CIRCUIT	PC	PRECAST CONCRETE
CL	CLEAR	PER.	PERIMETER
CLG.	CEILING	PL	PLATE
C.M.U.	CONCRETE MASONRY UNIT	PLBG.	PLUMBING
C.O.	CLEAN OUT	PLYWD	PLYWOOD
CPT	CARPET	PNL.	PANEL
COL.	COLUMN	PSF	POUNDS/SQUARE FOOT
COMP.	COMPRESSOR	PSI	POUNDS/SQUARE INCH
CONC.	CONCRETE	PGTG.	POUNDS/SQUARE INCH GAGE
COND.	CONDENSATE	P.T.	PRESSURE TREATED
CONN.	CONNECTION	PT	PAINT
CONT.	CONTINUOUS	PTD.	PAINTED
CJ	CONTROL JOINT		
CT	CERAMIC TILE	QT	QUARRY TILE
C.T.B.	CERAMIC TILE BASE	QTR.	QUARTER
CU	CONDENSING UNIT	QUAN.	QUANTITY
DET	DETAIL	R	RADIUS
DIA. D.	DIAMETER	R.A.	RETURN AIR
DIFF.	DIFFUSER	RAD.	RADIUS
DIM.	DIMENSION	R.A.G.	RETURN AIR GRILLE
DISC.	DISCONNECT	R.A.R.	RETURN AIR REGISTER
DIST.	DISTRIBUTION	RD.	ROUND
D.J.	DUMMY JOINT	R.D.	ROOF DRAIN
DN.	DOWN	RDY.	READY
DR	DRAIN	RECIRC.	RECIRCULATING
D.S.	DOWNSPOUT	RECIP.	RECEIPTACLE
DWG.(S)	DRAWING(S)	REG.	REGISTER
		REINF.	REINFORCING
E	EAST	REQ.	REQUIRED
E.A.	EACH	RET.	RETURN
E.C.	EMPTY CONDUIT	R.G.	RETURN GRILLE
E.F.	EXHAUST FAN	RM.	ROOM
EL	FLOOR ELEVATION	R.O.	ROUGH OPENING
ELEV.	ELEVATION	R.P.M.	REVOLUTION/MINUTE
EQ	EQUAL	RWL.	RAIN WATER LEADER
EQUIP.	EQUIPMENT		
E.W.C.	ELECTRIC WATER COOLER	S.A.	SUPPLY AIR
EXH.	EXHAUST	S.A.T.	SUSPENDED ACOUSTICAL TILE
EXP.	EXPANSION	SCH.	SCHEDULE
E.W. J.	EXPANSION JOINT (EJ)	SECT.	SECTION
E.W.	EACH WAY	SERV.	SERVICE
EXT.	EXTERIOR	S.G.	SUPPLY GRILLE
EXIST.	EXISTING		SWEET

CS-1	COVER SHEET		
CS-2	INDEX SHEET		
ARCHITECTURAL			
EX1.1	EXISTING FLOOR PLAN	MP0.1	LEGEND, NOTES, & SCHEDULES - MECHANICAL AND PLUMBING
EX1.2	EXISTING ENLARGED FLOOR PLANS	MP1.0	LEVEL 4 OVERALL PLAN & DETAILS - MECHANICAL AND PLUMBING
EX2.1	EXISTING ENLARGED REFLECTED CEILING PLANS	MP1.1	LEVEL 4 RENOVATION PLANS - MECHANICAL AND PLUMBING
D1.1	DEMOLITION PLANS	E0.1	SYMBOLS ABBREVIATION AND SCHEDULES
D1.2	DEMOLITION PLANS	E0.2	DETAILS - ELECTRICAL
D1.3	DEMOLITION PLANS	E1.0	LEVEL 4 OVERALL PLAN - ELECTRICAL
		E1.1	LEVEL 4 ENLARGED PLANS - DEMO & RENOVATION - LIGHTING
		E2.1	LEVEL 4 ENLARGED PLANS - DEMO & RENOVATION - POWER & SYSTEMS
A1.1	NEW PLANS		
A1.2	NEW PLANS		
A1.3	NEW PLANS		
A6.1	BUILDING DETAILS		
A6.2	NOTES		

THE PROJECT WILL BE THE RENOVATION OF THREE ROOMS, 419, 421, AND 430, ON THE FOURTH FLOOR OF THE BELLAMY BUILDING.

THE PLANS ARE FOR INFORMATIONAL PURPOSES ONLY. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND ALL CONDITIONS. IF THE CONTRACTOR IS UNABLE TO INTERPRET THE CONSTRUCTION DOCUMENTS, HE/SHE IS RESPONSIBLE FOR REQUESTING CLARIFICATION IN WRITING TO THE ARCHITECT. IF THE CONTRACTOR PROCEEDS WITH ANY WORK BEFORE OBTAINING CLARIFICATION, HE/SHE SHALL BE HELD RESPONSIBLE FOR ALL DEFICIENCIES ASSOCIATED THERE.

DIMENSIONS ARE TAKEN FROM THE FACE OF EXISTING NON AND LOAD BEARING INTERIOR WALLS AND FROM THE FACE OF STUD FOR NEW WALLS.

BEFORE SUBMITTING FOR WORK OR BEGINNING WORK, THE CONTRACTOR WILL BE HELD TO HAVE EXAMINED THE PREMISES AND SATISFIED HIMSELF/HERSELF AS TO THE EXISTING CONDITIONS UNDER WHICH HE/SHE WILL BE OBLIGATED AND COMPLETE THE WORK UNDER THE CONTRACT. NO ALLOWANCE WILL BE MADE SUBSEQUENTLY IN THIS CONNECTION ON BEHALF OF THE CONTRACTOR FOR ANY ERRORS OR NEGLIGENCE ON HIS/HER PART.

CONTRACTOR SHALL ERECT AND MAINTAIN ALL REASONABLE SAFEGUARDS FOR SAFETY AND HEALTH INCLUDING POSTING DANGER SIGNS, AND OTHER WARNING AGAINST HAZARDS, AS WELL AS PROMULGATING SAFETY REGULATIONS. CONTRACTOR SHALL PROVIDE SAFETY PRECAUTIONS AND BARRICADES FOR PEDESTRIANS AT CONSTRUCTION, VEHICLE ACCESS AND EGRESS LOCATIONS.

THE CONTRACTOR SHALL SUBMIT A COMPLETE DETAILED CONSTRUCTION SCHEDULE AND PLAN PRIOR TO THE PRE-CONSTRUCTION CONFERENCE.

CONTRACTOR SHALL BE RESTRICTED TO AREAS SPECIFIED BY OWNER FOR ON SITE STORAGE OF CONSTRUCTION MATERIALS. COMPARTMENT TRAILERS OR SIMILAR PROTECTIVE STORAGE FACILITIES MAY BE UTILIZED ON SITE TO SECURE ALL EQUIPMENT AND ITEMS REMOVED DURING PROJECT WORK. THE CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION AND SECURITY OF ALL EQUIPMENT AND ITEMS REMOVED.

CONTRACTOR SHALL COORDINATE WITH LOCAL ELECTRICAL POWER AND WATER UTILITY PROVIDERS TO INSTALL NEW SERVICE TO THE SITE PRIOR TO THE START OF CONSTRUCTION.

ALL WORK SHALL COMPLY WITH APPLICABLE OSHA AND EPA REGULATIONS AND GUIDELINES.

INSTALL WORK IN ACCORDANCE WITH THE CODES LISTED ON THE INDEX SHEET. IMMEDIATELY NOTIFY THE ARCHITECT WHEN CONFLICTS OCCUR BETWEEN CODES AND BETWEEN THE CONSTRUCTION DOCUMENTS.

CONTRACTOR SHALL FURNISH AS-BUILT DRAWINGS TO THE ARCHITECT AT COMPLETION OF THE CONSTRUCTION. CHANGES SHALL BE INDICATED CLEARLY BY MECHANICAL DRAFTING METHODS.

CONTRACTOR SHALL MAINTAIN A CLEAN WORK PREMISES AT ALL TIMES AND SHALL CLEAN CONSTRUCTION SITE OF ALL DEBRIS DAILY.

CONTRACTOR SHALL TAKE CARE NOT TO DAMAGE EXISTING SURFACES OUTSIDE THE SCOPE OF WORK AND SHALL BE RESPONSIBLE FOR RETURNING DAMAGED AREAS (MATERIALS, FINISHES, LANDSCAPE, ETC.) TO THEIR ORIGINAL CONDITION. ALL DISTURBED AREAS OF SOIL TO BE SOODED. ALL PLANTING REPLACEMENT TO BE GUARANTEED FOR ONE YEAR.

CONTRACTOR SHALL ERECT ALL SAFE GUARDS TO PROTECT ADJACENT AREAS. REMOVE DEBRIS FROM JOB SITE DAILY AND ADHERE TO ENVIRONMENTAL REGULATIONS.

WHERE A NOTE IS SHOWN FOR ONE CONDITION IT SHALL APPLY TO ALL SIMILAR AND LIKE CONDITIONS.

CONTRACTOR SHALL PATCH ALL SPALLED AND ROUGH CONCRETE FLOOR SURFACES TO PROVIDE A CONTINUOUS LEVEL CONCRETE SURFACE.

A DISCOVERY OF ASBESTOS, ALL MATERIAL KNOWN TO CONTAIN ASBESTOS & THAT WILL BE IMPACTED BY DEMOLITION & CONSTRUCTION ACTIVITIES INCLUDED IN THE PROJECT SCOPE OF WORK HAVE BEEN REMOVED. IN THE EVENT CONCEALED CONDITIONS ARE ENCOUNTERED, NOTIFY THE ARCHITECT PRIOR TO PROCEEDING FURTHER WITH WORK.

OCCUPANCY GROUP:	FBC GROUP B BUSINESS	
GROSS FLOOR AREA:	FOURTH FLOOR	15,669 GSF
	ROOM 419	333 GSF
	ROOM 421	210 GSF
	ROOM 430	472 GSF
CONSTRUCTION TYPE:	TYPE II-B SPRINKLERED	
TENENT SEPARATION:	N/A	
FIRE ALARM:	EXISTING	

EXISTING BUILDING.....	FLORIDA EXISTING BUILDING CODE (FBC-EB)	2020, 7TH EDITION
FLORIDA BUILDING CODE (FBC-B)	2020, 7TH EDITION	
ACCESSIBILITY.....	FLORIDA BUILDING CODE (FBC-A)	2020, 7TH EDITION
MECHANICAL.....	FLORIDA BUILDING CODE (FBC-M)	2020, 7TH EDITION
ENERGY CONSERVATION.....	FLORIDA BUILDING CODE (FBC-EC)	2020, 7TH EDITION
FUEL GAS.....	FLORIDA BUILDING CODE (FBC-FG)	2020, 7TH EDITION
PLUMBING.....	FLORIDA BUILDING CODE (FBC-P)	2020, 7TH EDITION
FIRE PREVENTION.....	FLORIDA FIRE PREVENTION CODE (FFPC)	2020, 7TH EDITION
ELECTRICAL.....	NATIONAL ELECTRICAL CODE (NFPA 70)	2017 (per 7th Ed. FBC-B)

FLOOR PLAN LEGEND

Name	ROOM NAME AND NUMBER
101	
	EXISTING WALLS



FSU BELLAMY BUILDING

19480	Drawn By:	KV
Project Code	Checked By:	DB

9 NOVEMBER 2023

Date

CONTRACT DOCUMENTS

Revisions



- △
- △
- △
- △
- △
- △
- △

EXISTING FLOOR PLAN

Tallahassee Florida


EX1.1

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978

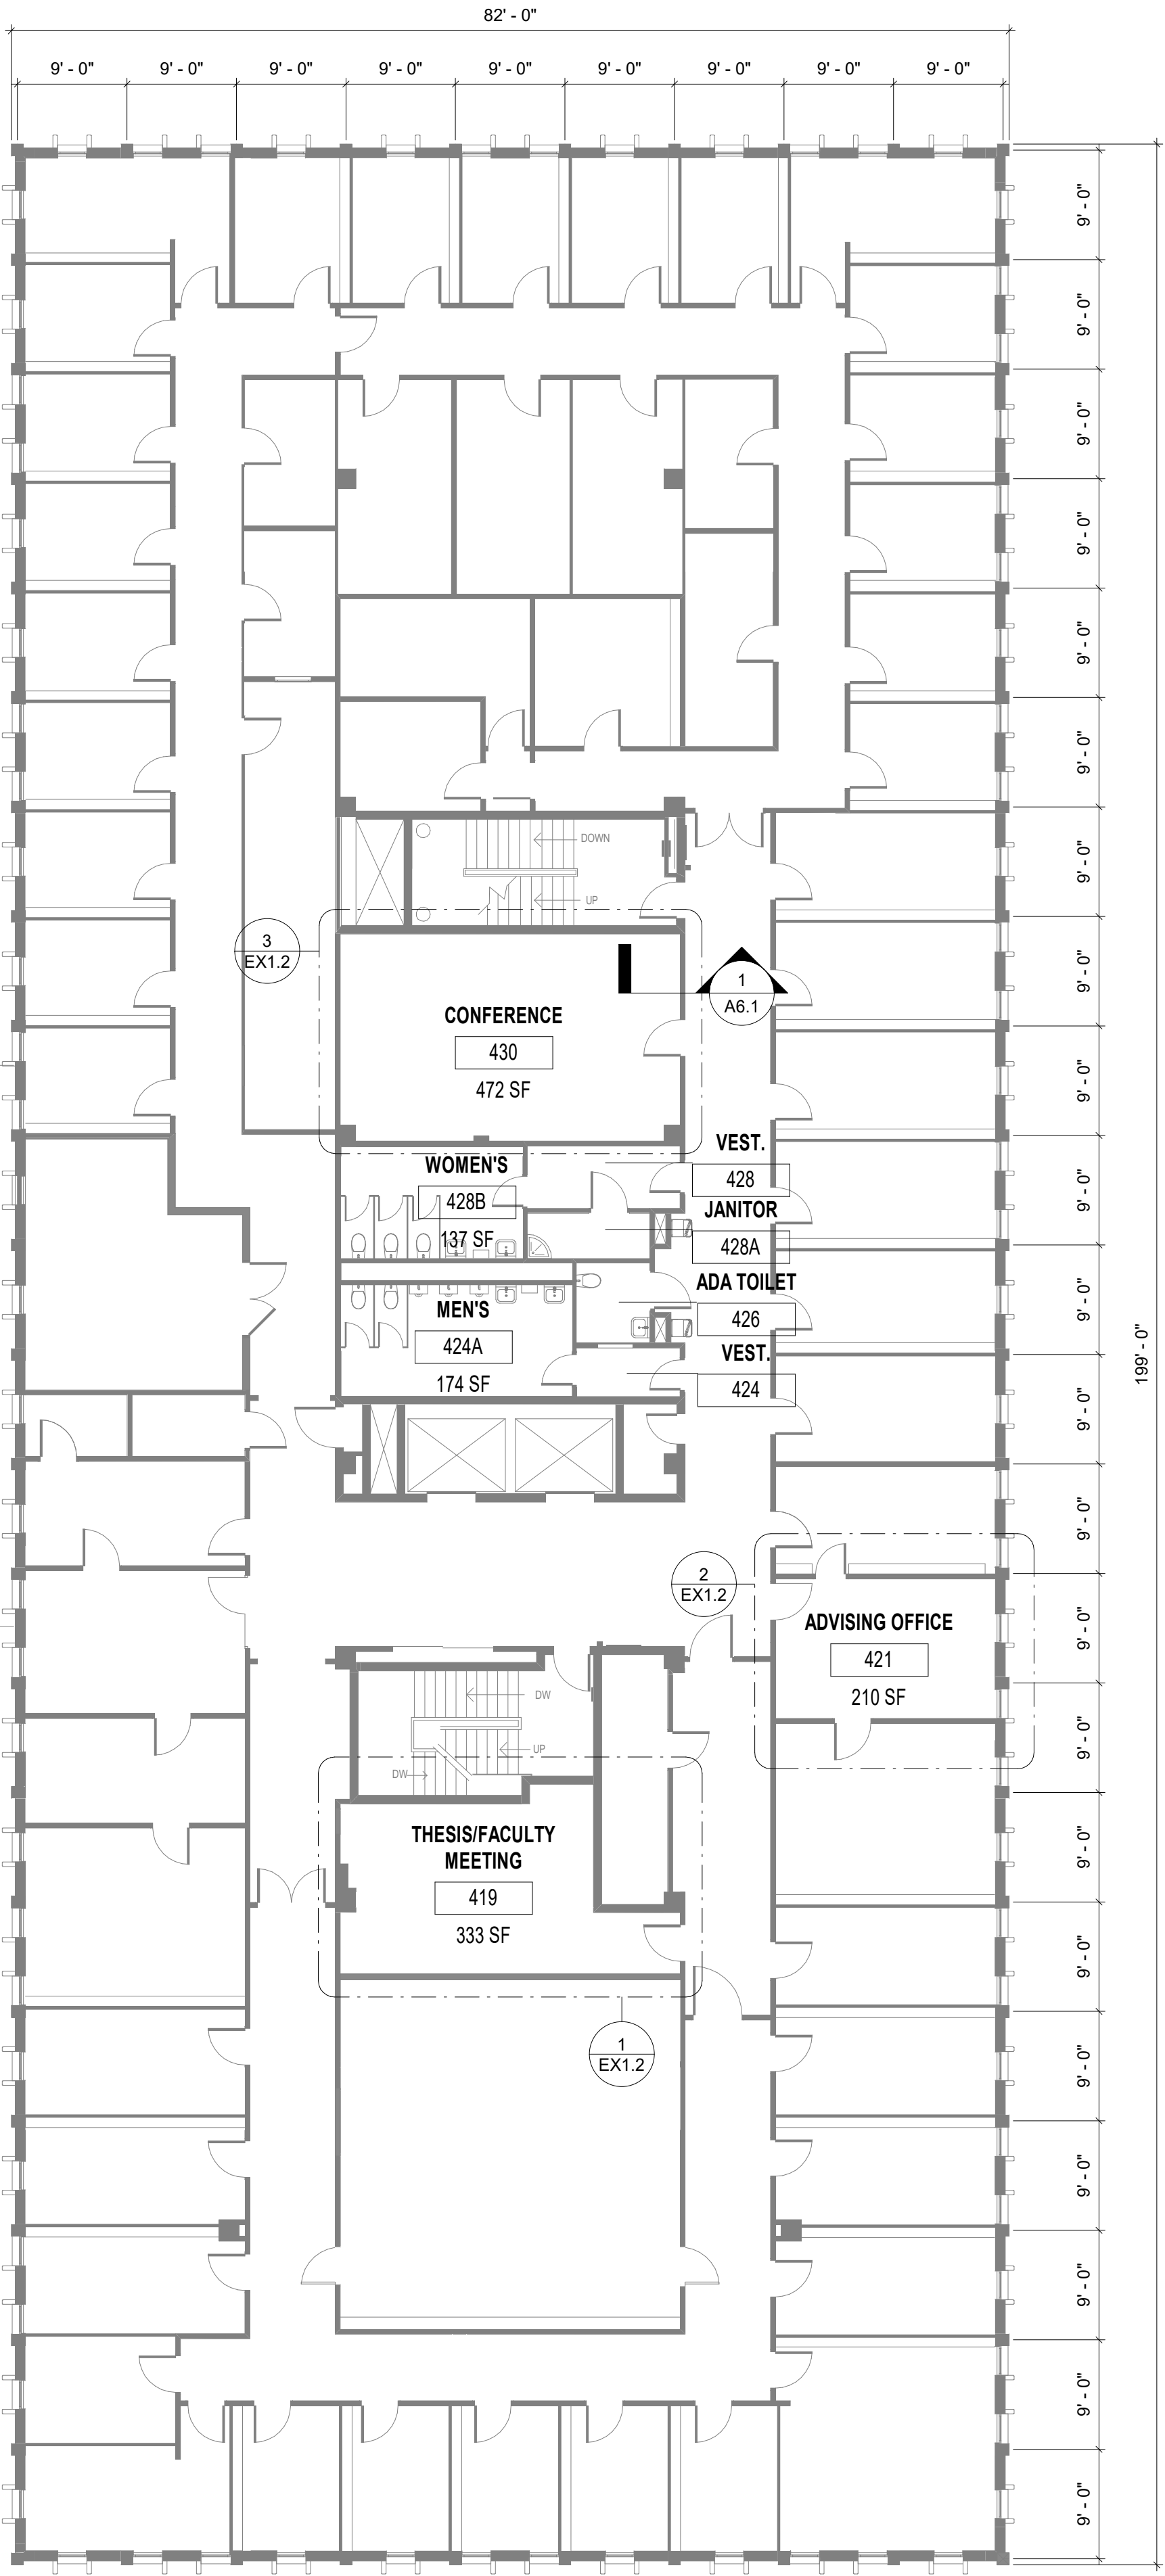


1 EXISTING LEVEL 4

EX1.1 3/32" = 1'-0"

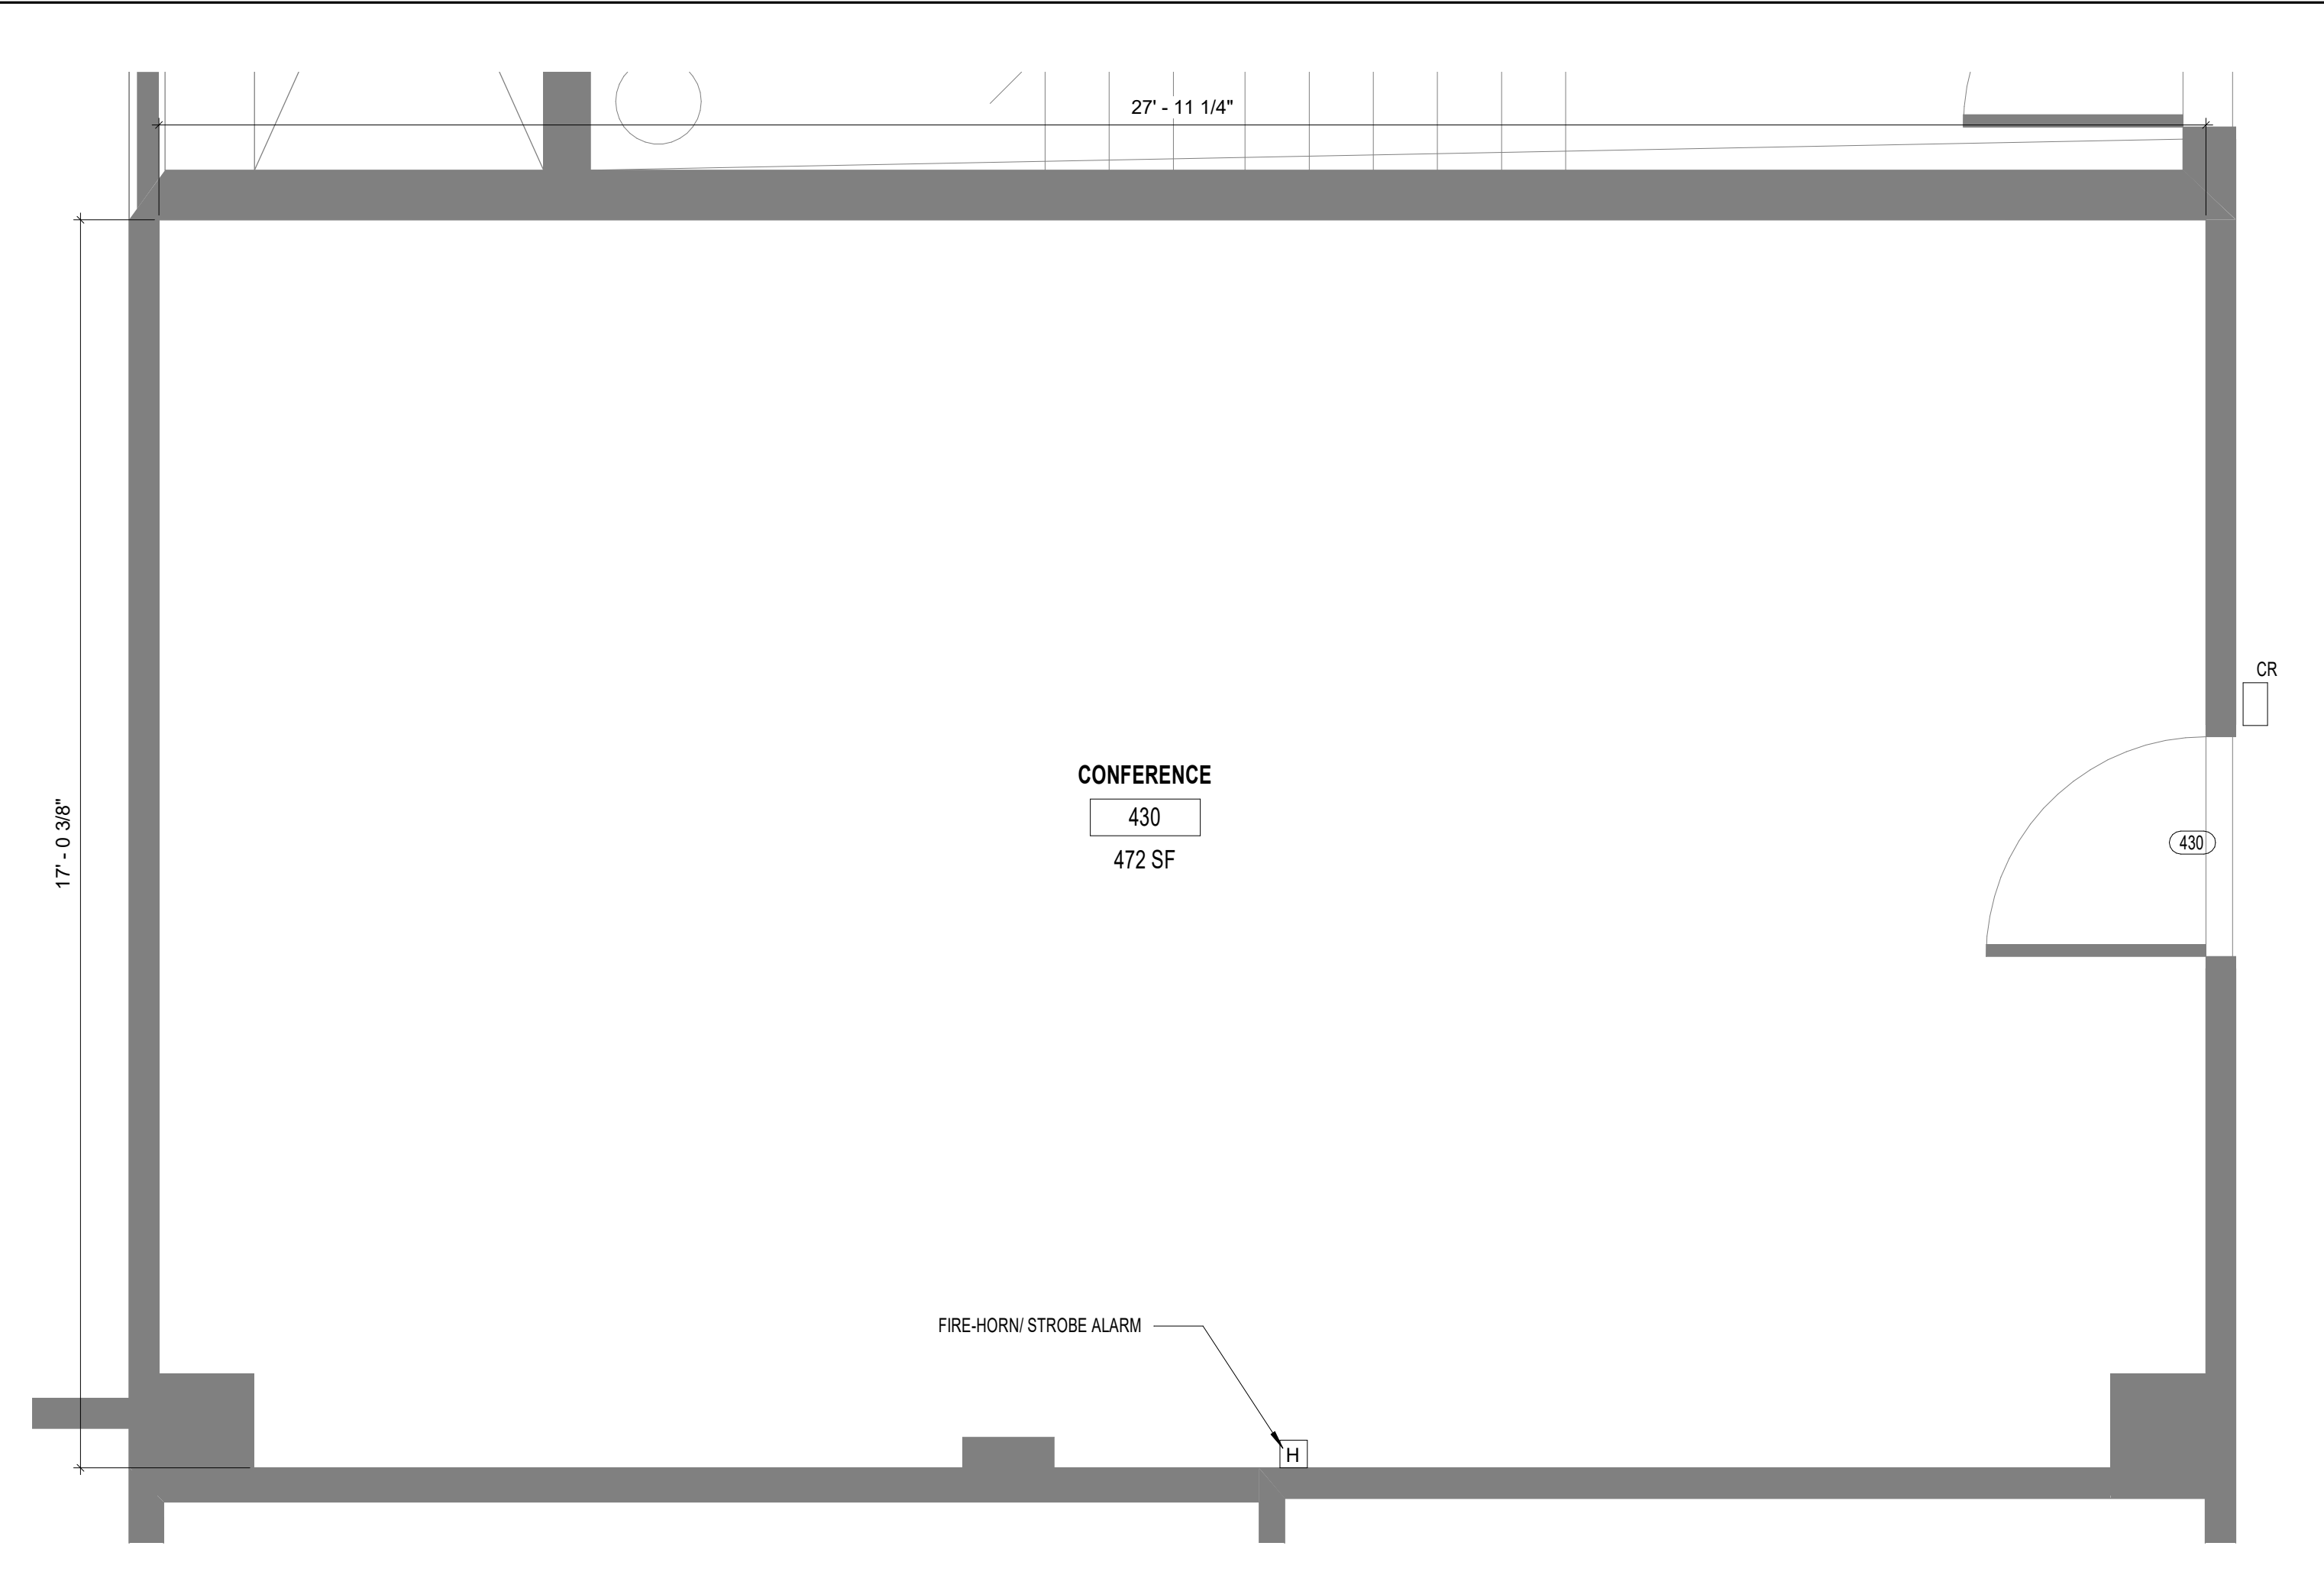


3 EXISTING LEVEL 4 - ROOM 430
EX1.2 1/2" = 1'-0"

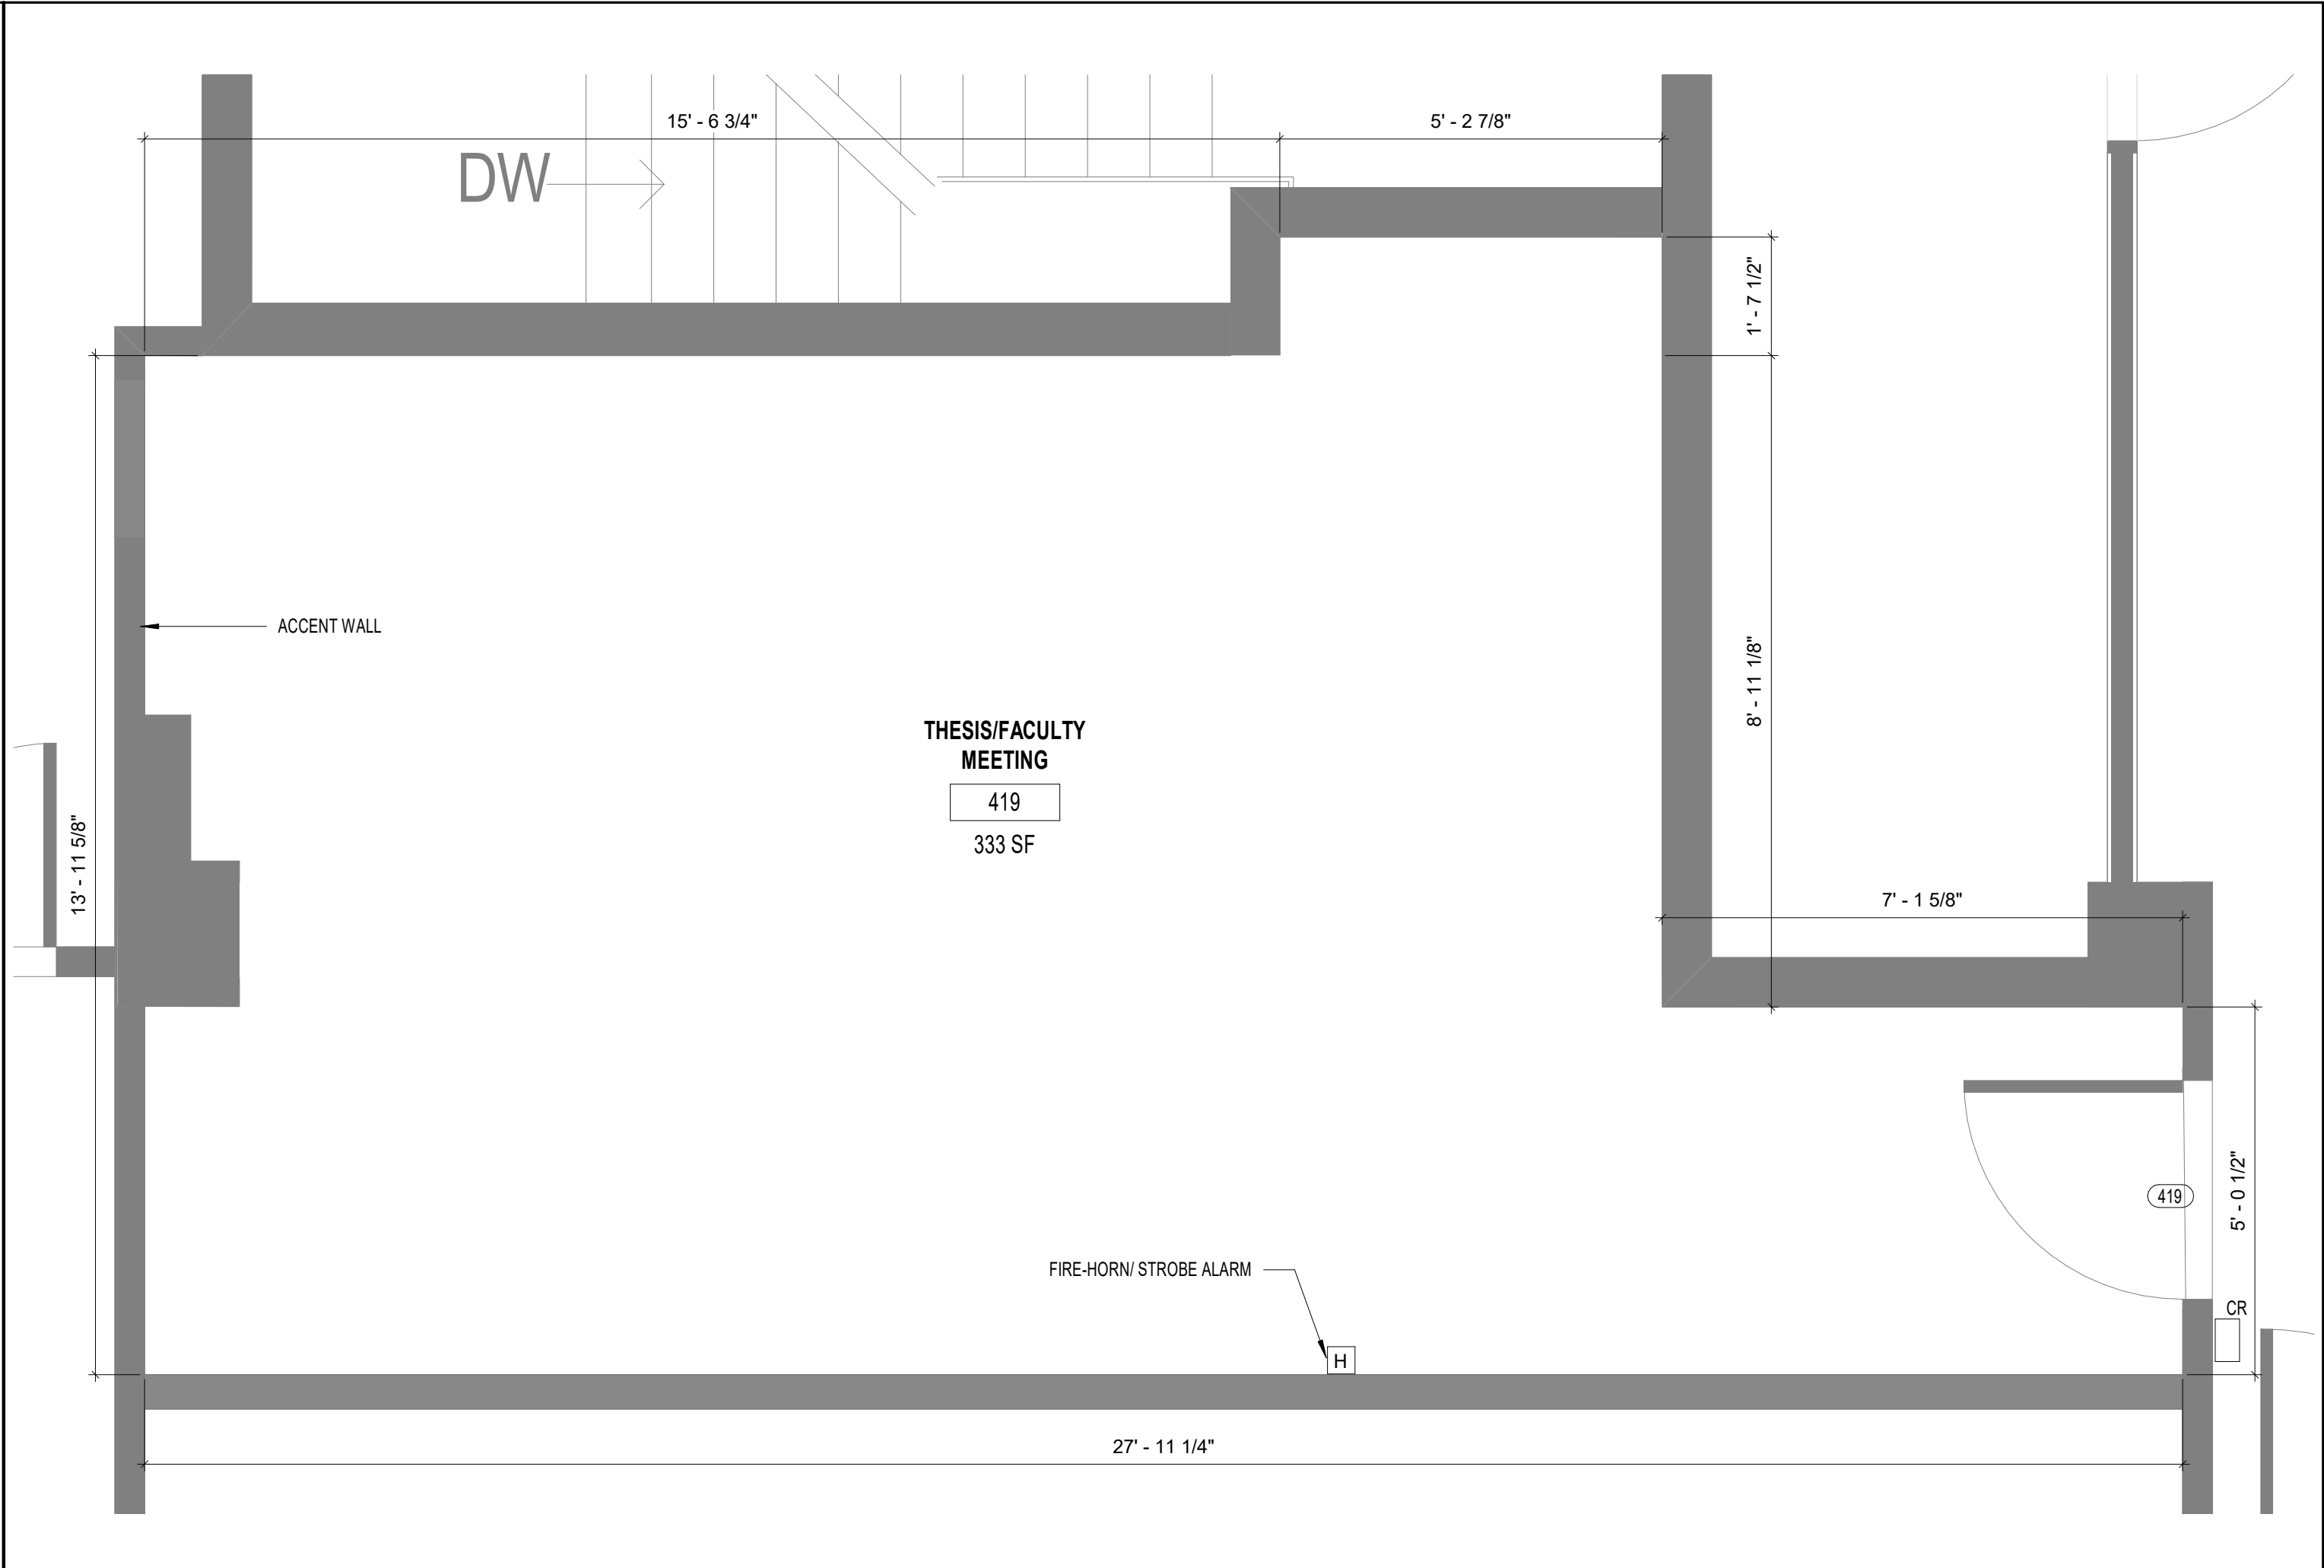

1 EXISTING LEVEL 4 - ROOM 419
EX1.2 1/2" = 1'-0"



2 EXISTING LEVEL 4 - ROOM 421
EX1.2 1/2" = 1'-0"

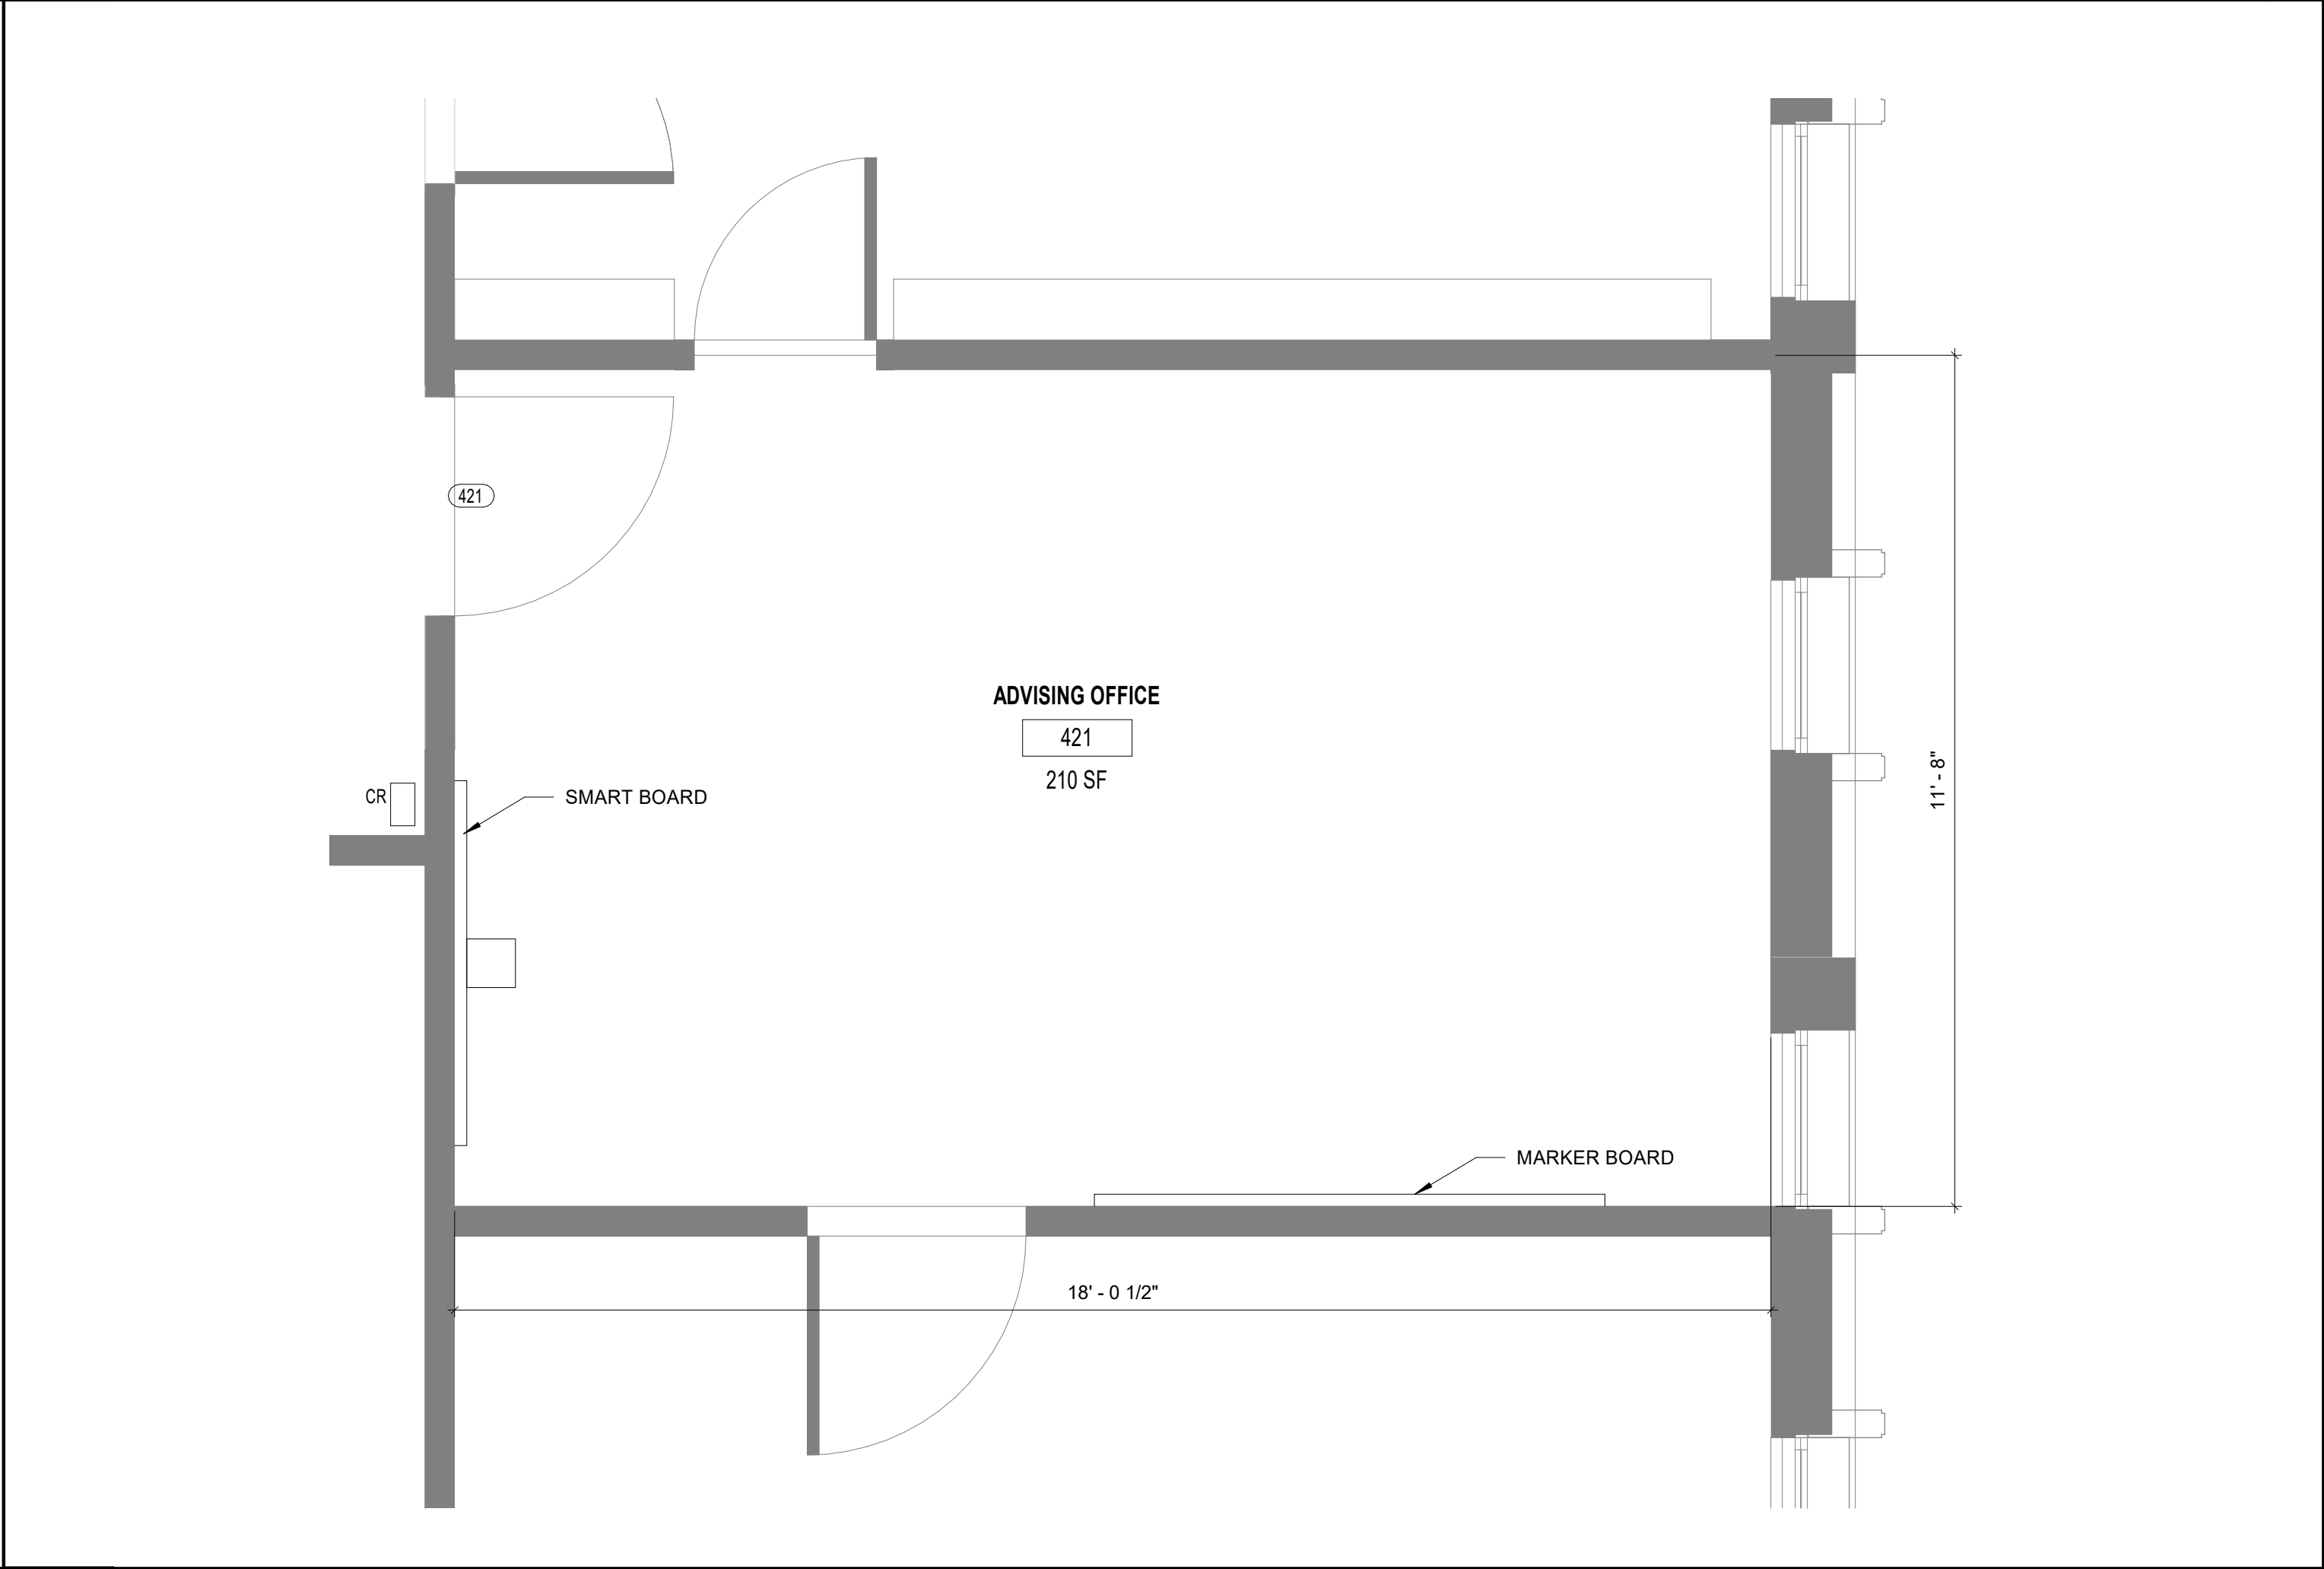

2 EXISTING LEVEL 4 - ROOM 421
EX1.2 1/2" = 1'-0"

NOTES

FLOOR PLAN LEGEND

Name

101

ROOM NAME AND NUMBER

EXISTING WALLS

H

FIVE-HORN/ STROBE ALARM

CR

CARD ACCESS

BARNETT
FRONCZAK
BARLOWE
&SHULER
ARCHITECTS

FSU BELLAMY
BUILDING

19480

Drawn By:

KV

Project Code

Checked By:

DB

Date

9 NOVEMBER 2023

CONTRACT
DOCUMENTS

Revisions

△

△

△

△

△

△

△

EXISTING
ENLARGED FLOOR
PLANS

Tallahassee

Florida


EX1.2

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308

Phone 850 224-6301

Fax 850 561-6978

Copyright Barnett Fronczak Barlowe & Shuler, Architects. All rights Reserved

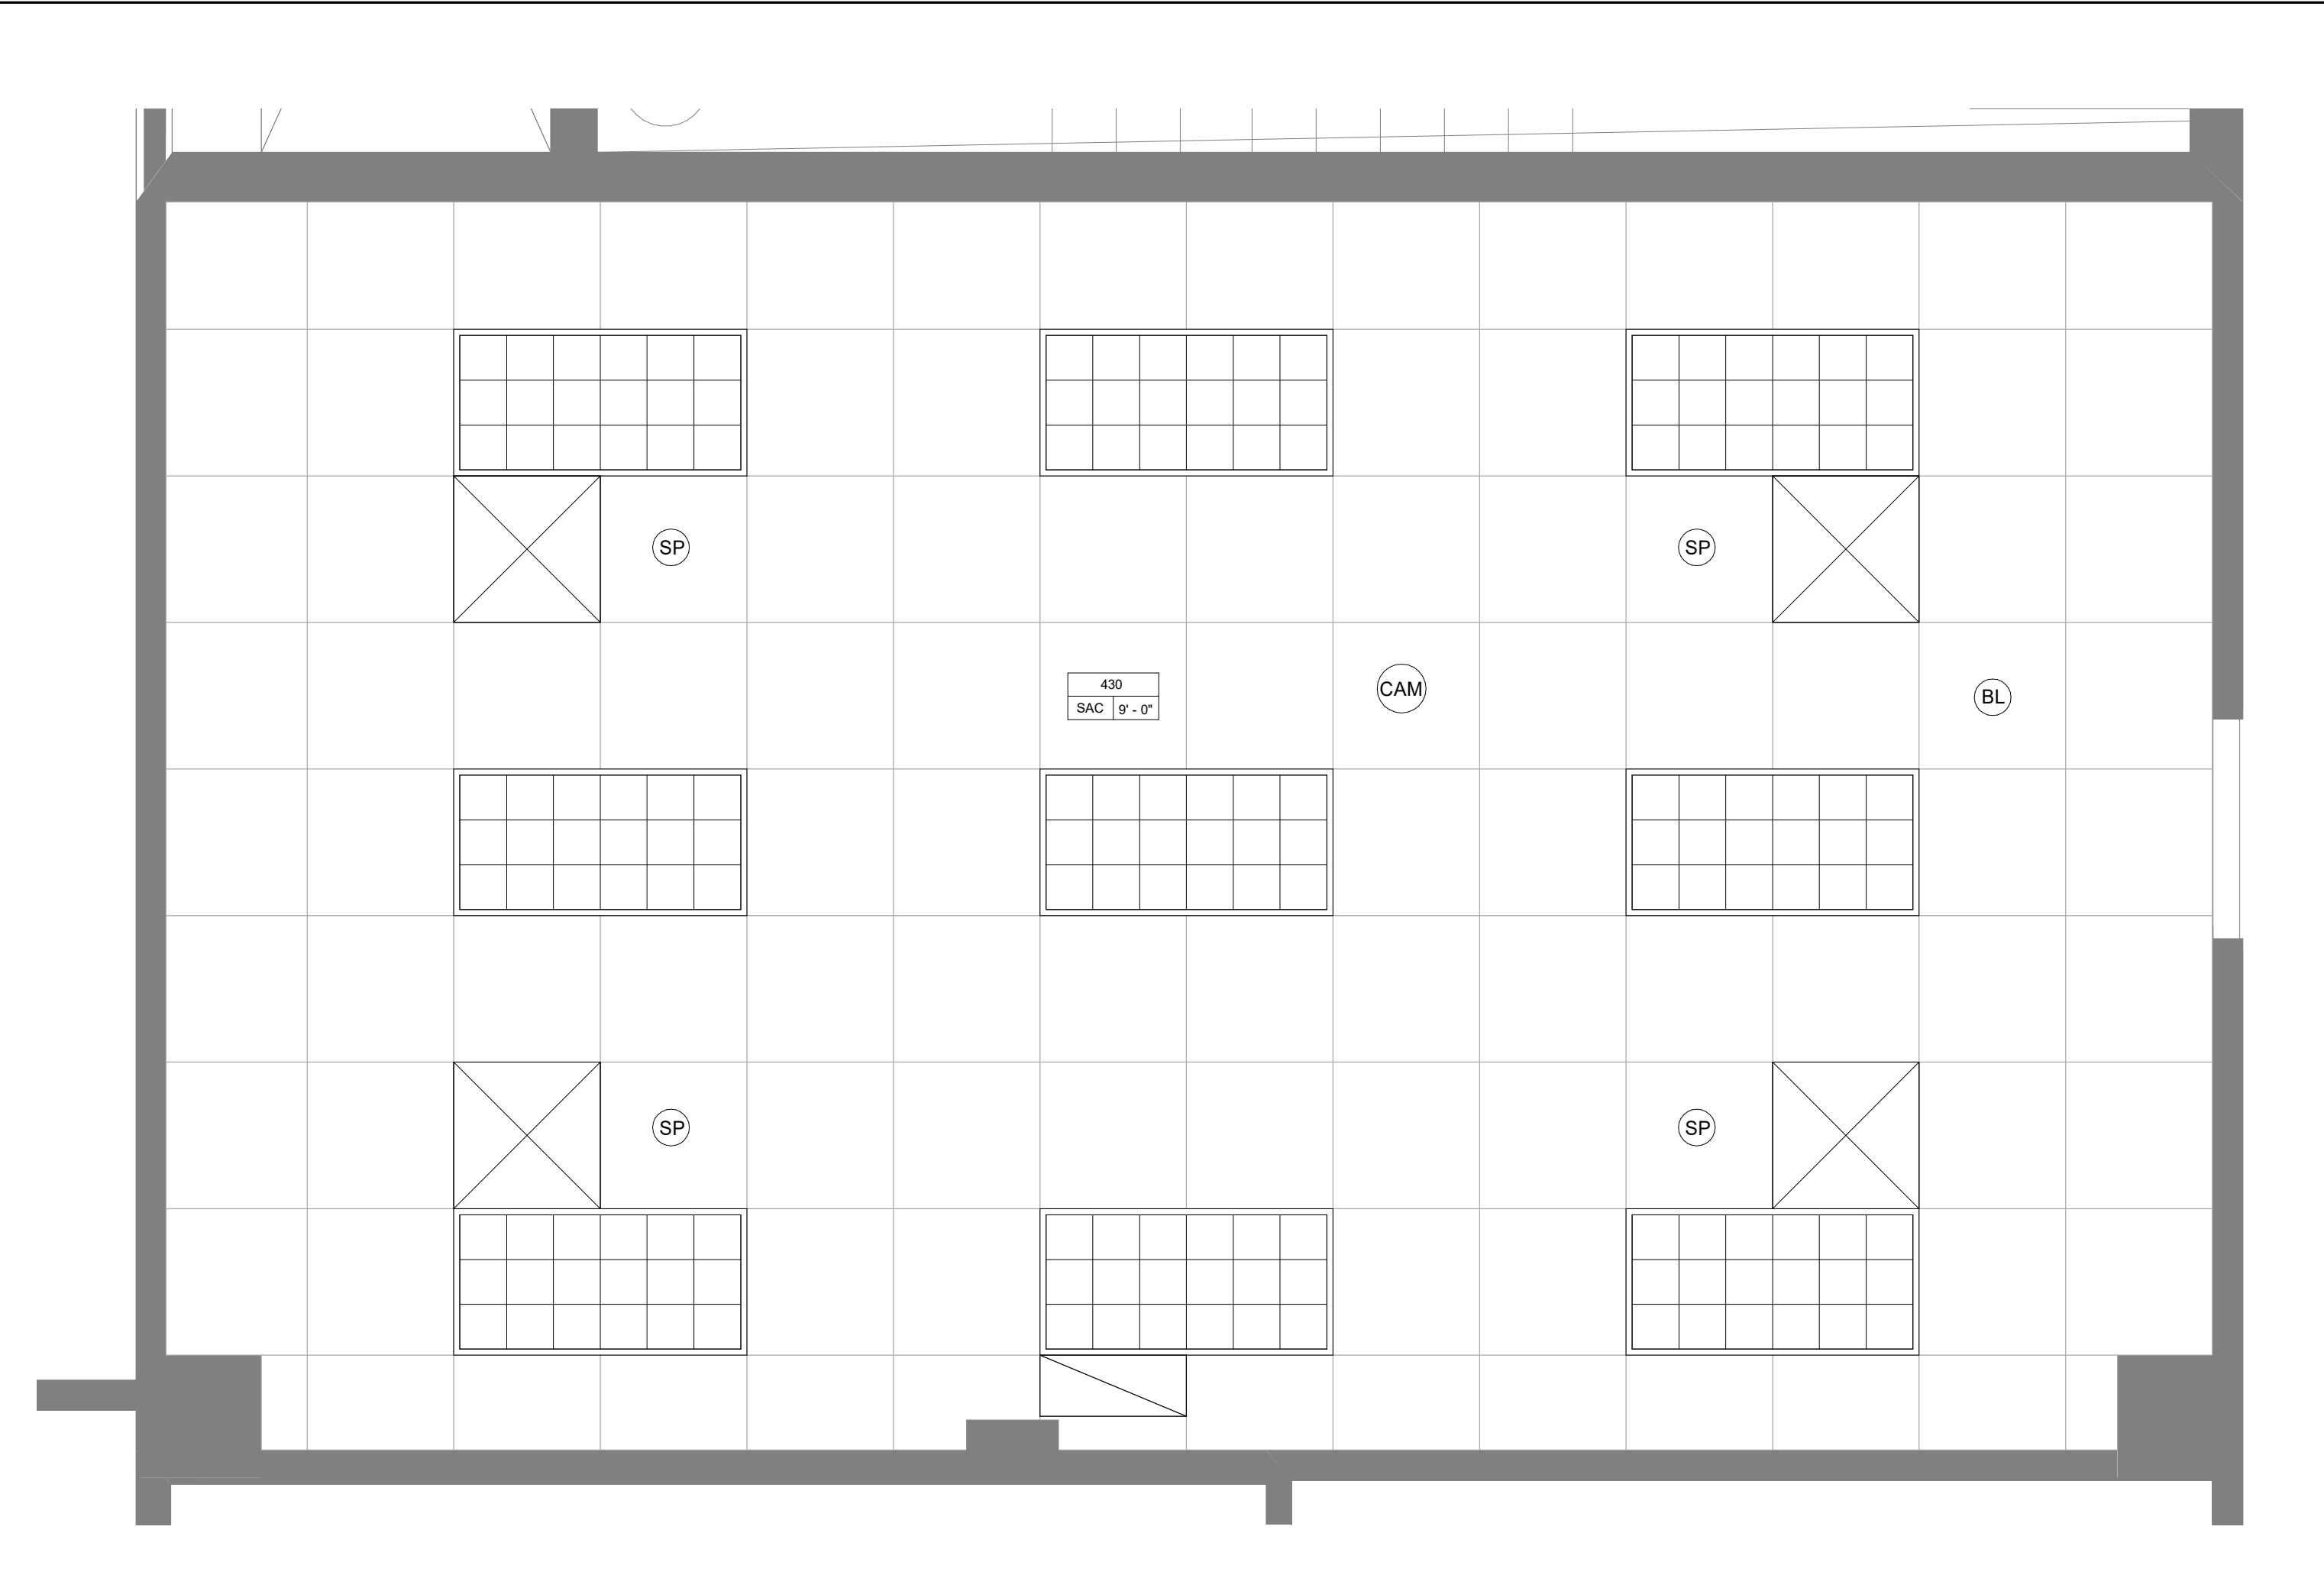


3

EXISTING REFLECTED CEILING PLAN LEVEL 4 - ROOM 430

EX2.1

1/2" = 1'-0"

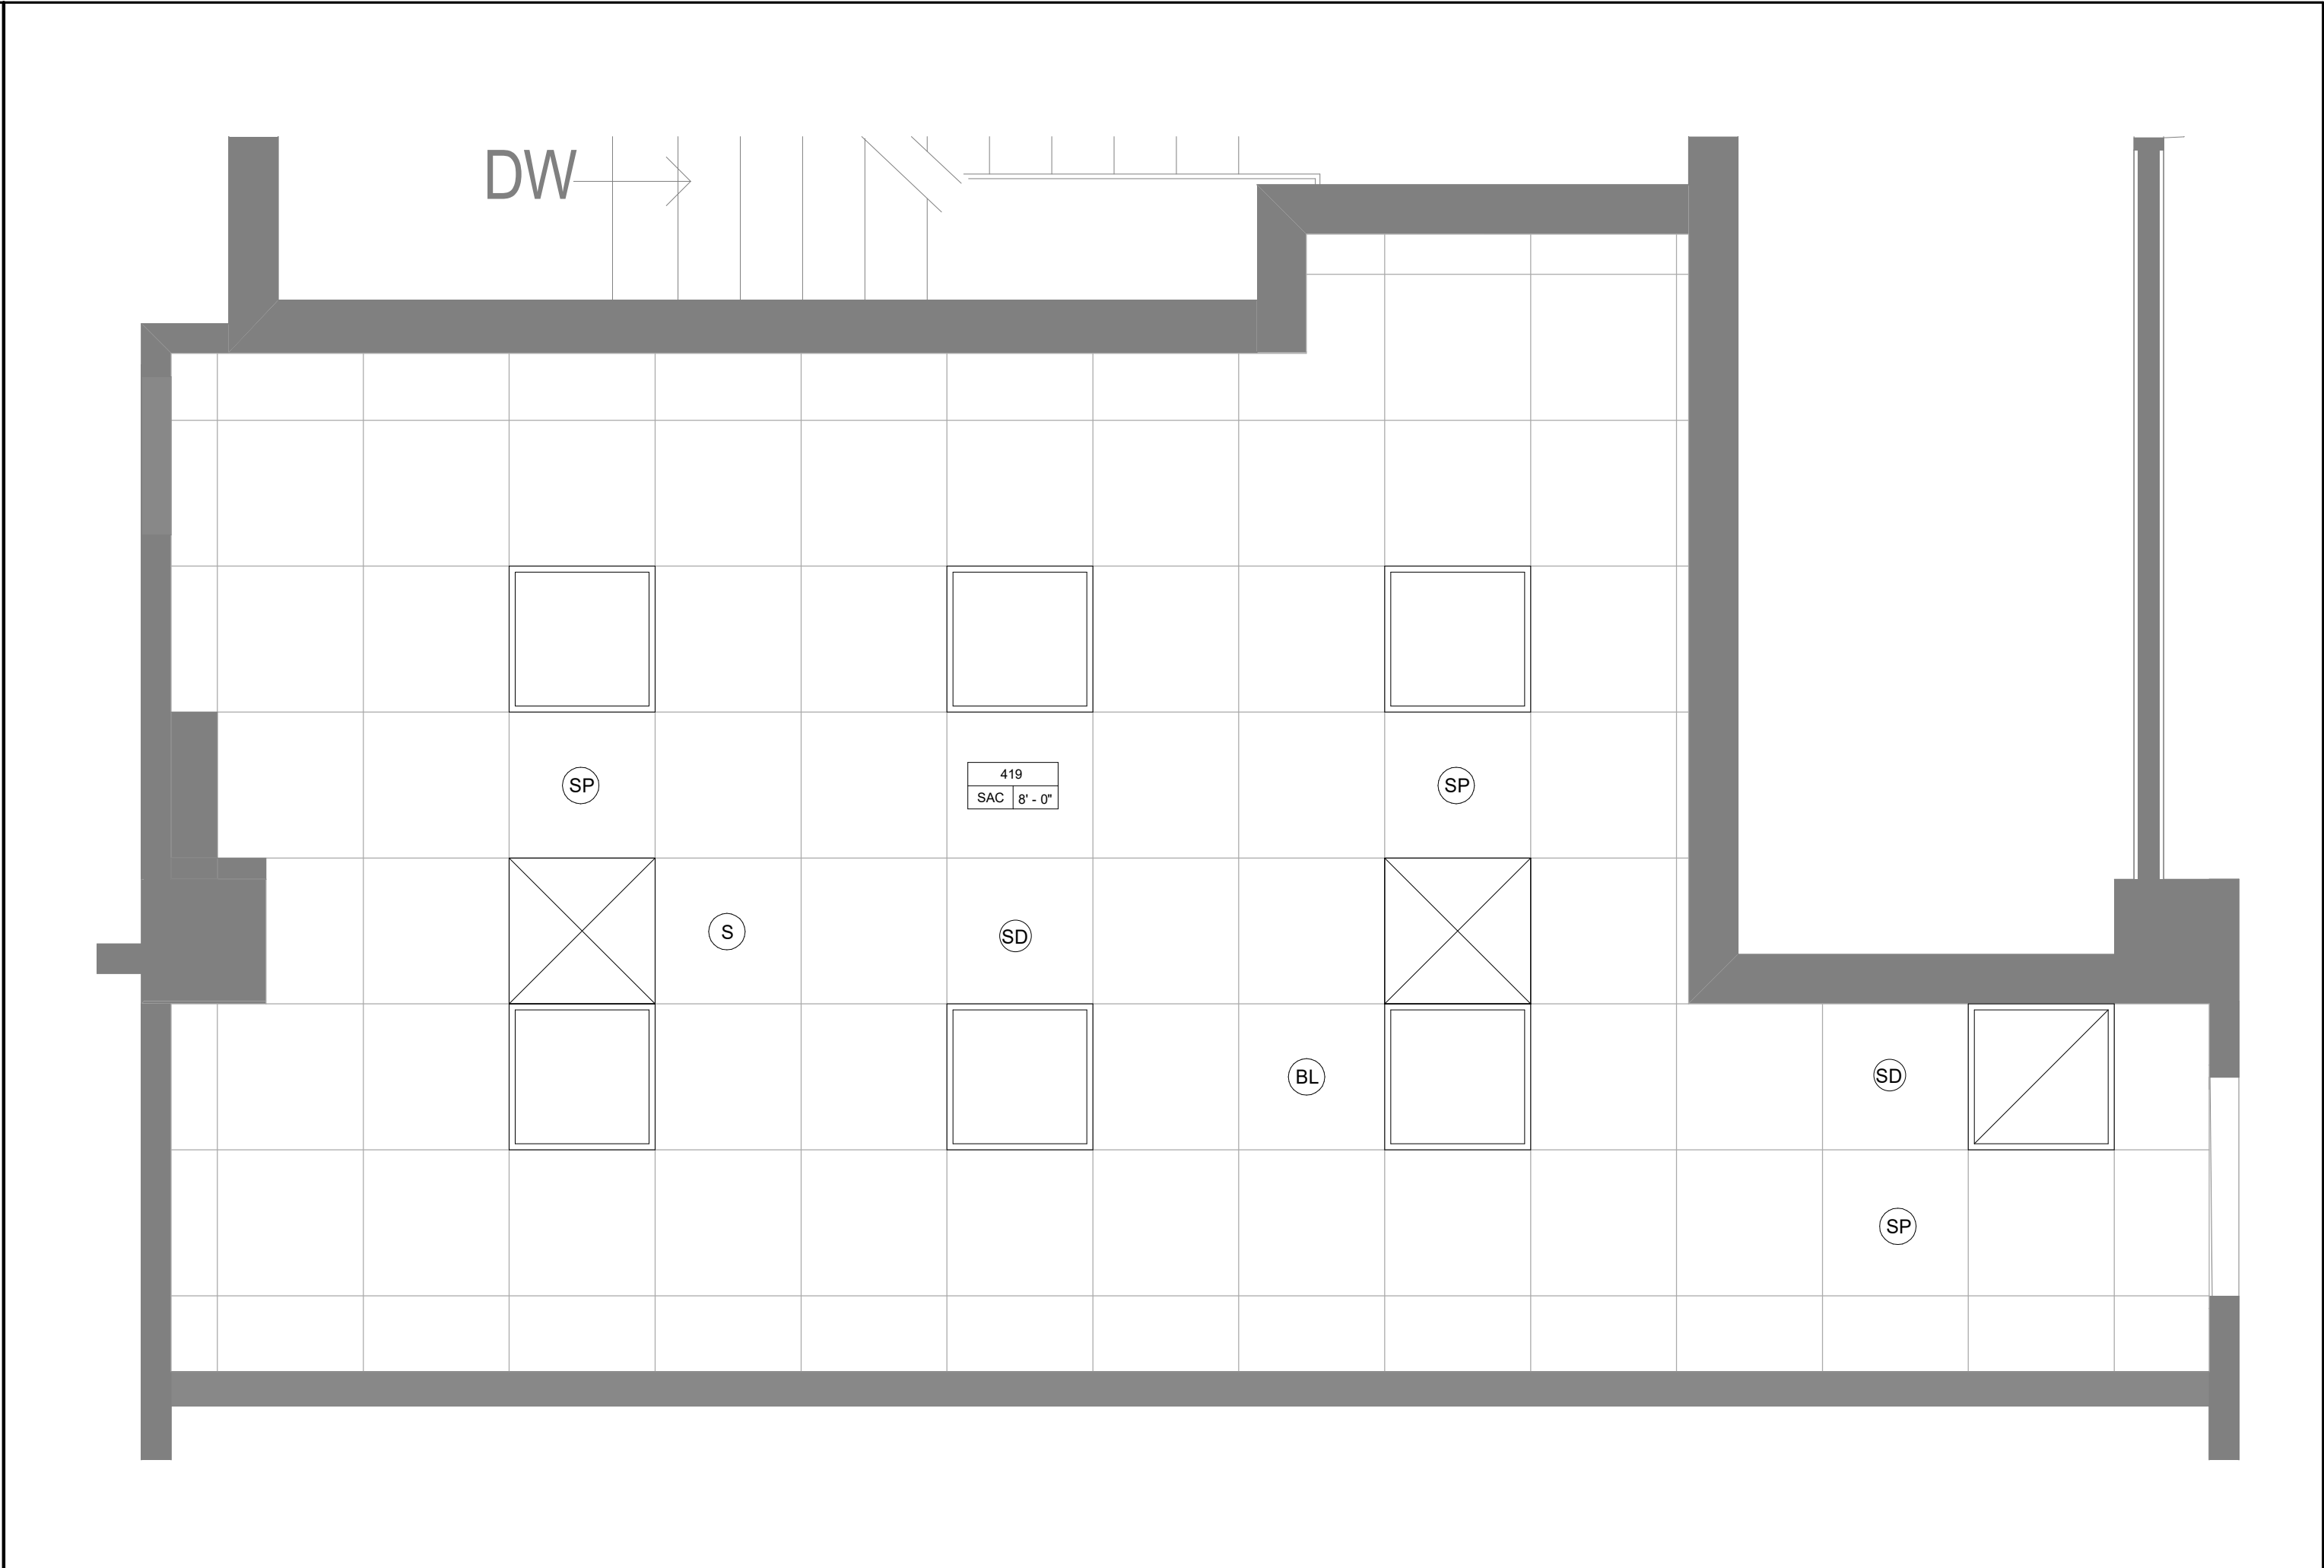


1

EXISTING REFLECTED CEILING PLAN LEVEL 4 - ROOM 419

EX2.1

1/2" = 1'-0"

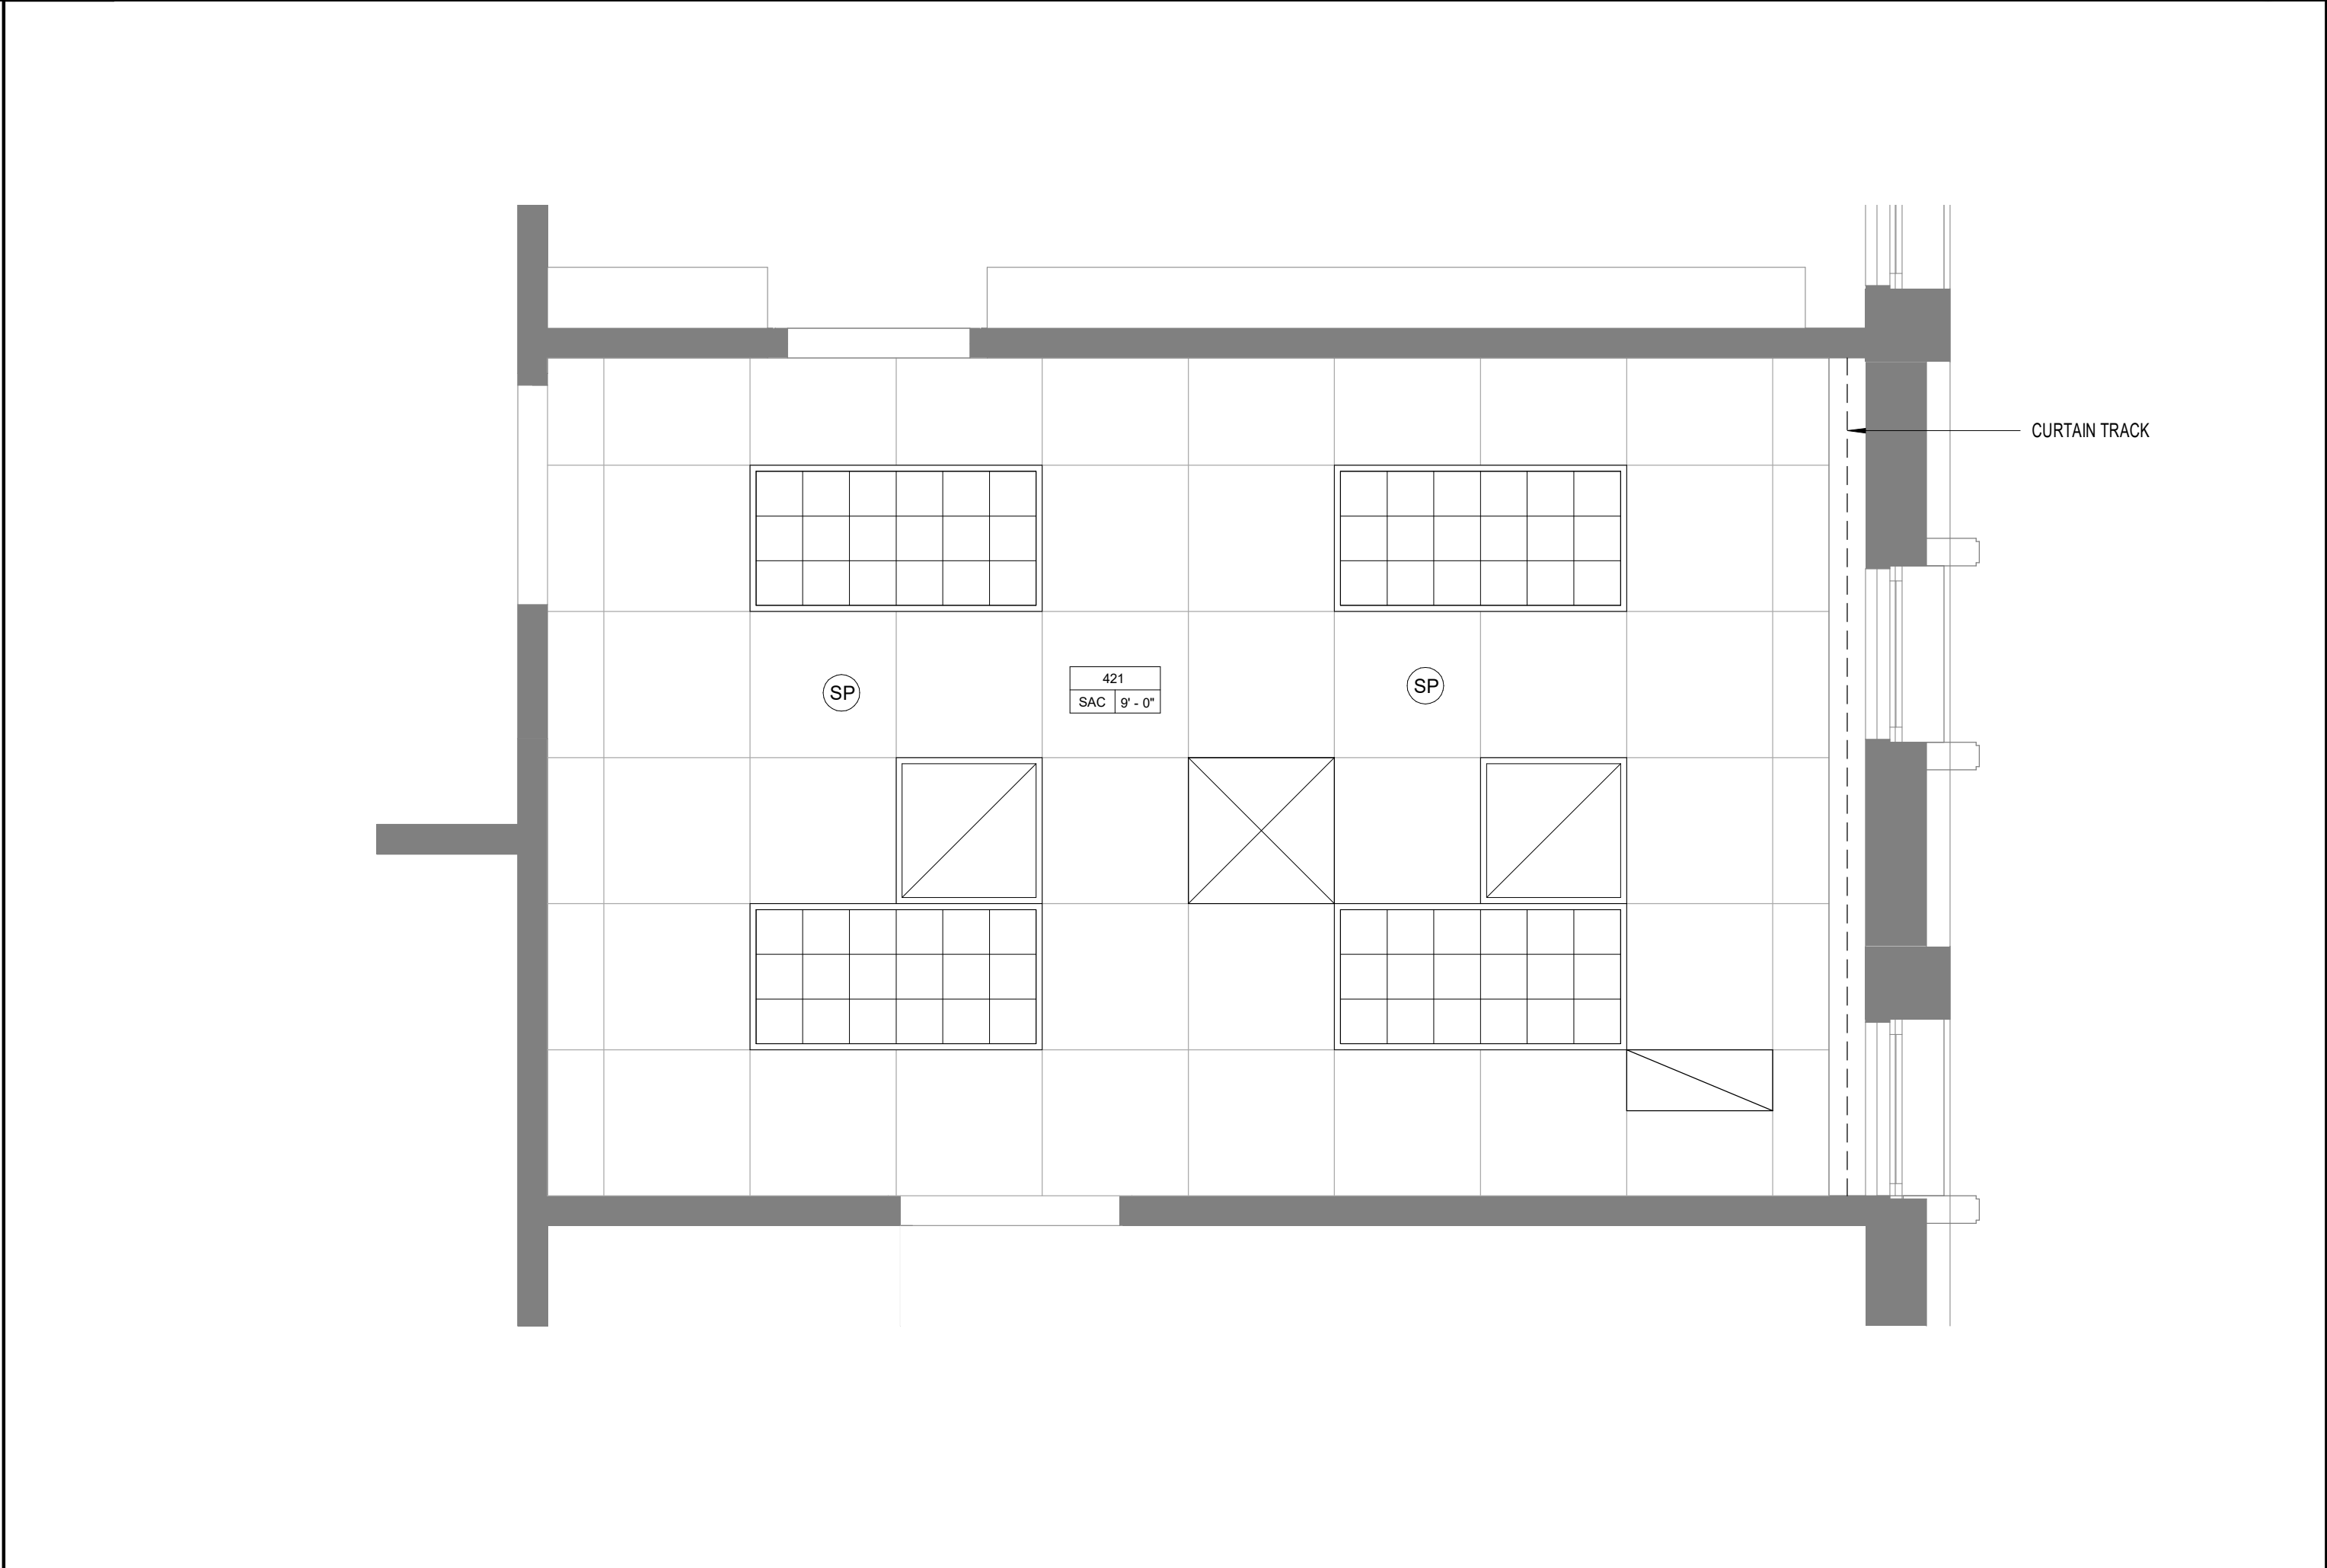

2

EXISTING REFLECTED CEILING PLAN LEVEL 4 - ROOM 421

EX2.1

1/2" = 1'-0"

NOTES

RCP LEGEND

001

SAC

10'-0"

ROOM NUMBER

CEILING HEIGHT

CEILING MATERIAL

CEILING FINISHES

SAC CEILING -
SEE RCP FOR CEILING HEIGHTS

CEILING ACCESSORIES

2' x 4' LAY-IN FLUORESCENT LIGHT
FIXTURE

2' x 2' LAY-IN FLUORESCENT LIGHT
FIXTURE

EMERGENCY EXIT LIGHT

CEILING DIFFUSER

RETURN AIR GRILLE

BLUE LIGHT

FIRE SPRINKLER

SPEAKER

CAMERA

SMOKE DETECTOR

BARNETT
FRONCZAK
BARLOWE
&SHULER
ARCHITECTS

FSU BELLAMY
BUILDING

19480

Drawn By:

KV

Project Code

Checked By:

DB

9 NOVEMBER 2023

Date

CONTRACT
DOCUMENTS

Revisions

EXISTING
ENLARGED
REFLECTED
CEILING PLAN

Tallahassee


Florida

EX2.1


2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978

DEMOLITION NOTES: SEE PLANS FOR SCOPE OF WORK

- D1
- EXISTING DOOR ASSEMBLY, HM FRAME AND ASSOCIATED HARDWARE TO BE REMOVED BY OTHERS.
- D2
- EXISTING CARPET FLOORING, RESILIENT WALL BASE AND VINYL ASBESTOS TILE BENEATH TO BE REMOVED AND REMEDIATED FOR ASBESTOS CONTAMINATION BY OTHERS. PREPARE EXITING FLOOR SLAB AS REQUIRED TO RECEIVE NEW FLOOR.
- D3
- EXISTING VINYL ASBESTOS TILE FLOORING AND WALL BASE TO BE REMOVED AND REMEDIATED FOR ASBESTOS CONTAMINATION BY OTHERS. PREPARE EXISTING FLOOR SLAB AS REQUIRED TO RECEIVE NEW FLOOR FINISHES.
- D4
- EXISTING MARKER BOARD TO BE REMOVED BY OTHERS.
- D5
- EXISTING WALL MOUNTED SMART BOARD TO BE REMOVED BY OTHERS.
- D6
- EXISTING INTERIOR GYP. BOARD LAYER TO BE REMOVED AND REMEDIATED FOR ASBESTOS CONTAMINATED BY OTHER. STUD WALL CAVITY TO BE DECONTAMINATED. EXTERIOR GYP. BOARD LAYER AND METAL STUDS TO REMAIN.
- D7
- EXISTING SUSPENDED CEILING WALL ANGLE TRACK AND ACOUSTICAL CEILING PANELS AT PERIMETER OF ROOM TO BE REMOVED BY OTHERS. REMAINING ACOUSTICAL CEILING SUSPENDED GRID PANELS, LIGHTS AND HVAC GRILLES TO BE REMOVED BY THE CONTRACTOR.
- D8
- CURTAIN ROD TO BE REMOVED BY OTHERS. CONTRACTOR TO REPAIR DRYWALL. EXISTING BLINDS TO BE REMOVED BY OTHERS.
- D9
- REMOVE BLUE LIGHT ALARM AND J. BOX AND CONDUIT.
- D10
- AT THE 3RD FLOOR THE EXISTING CEILING AND WALL GYPSUM WALLBOARD TO BE REMOVED BY OTHERS, FOR INSTALLATION OF PLUMBING PIPING FROM NEW 4TH FLOOR COFFEE BAR.
- D11
- REMOVE EXISTING CAMERA AND OUTLET AND CONDUIT.

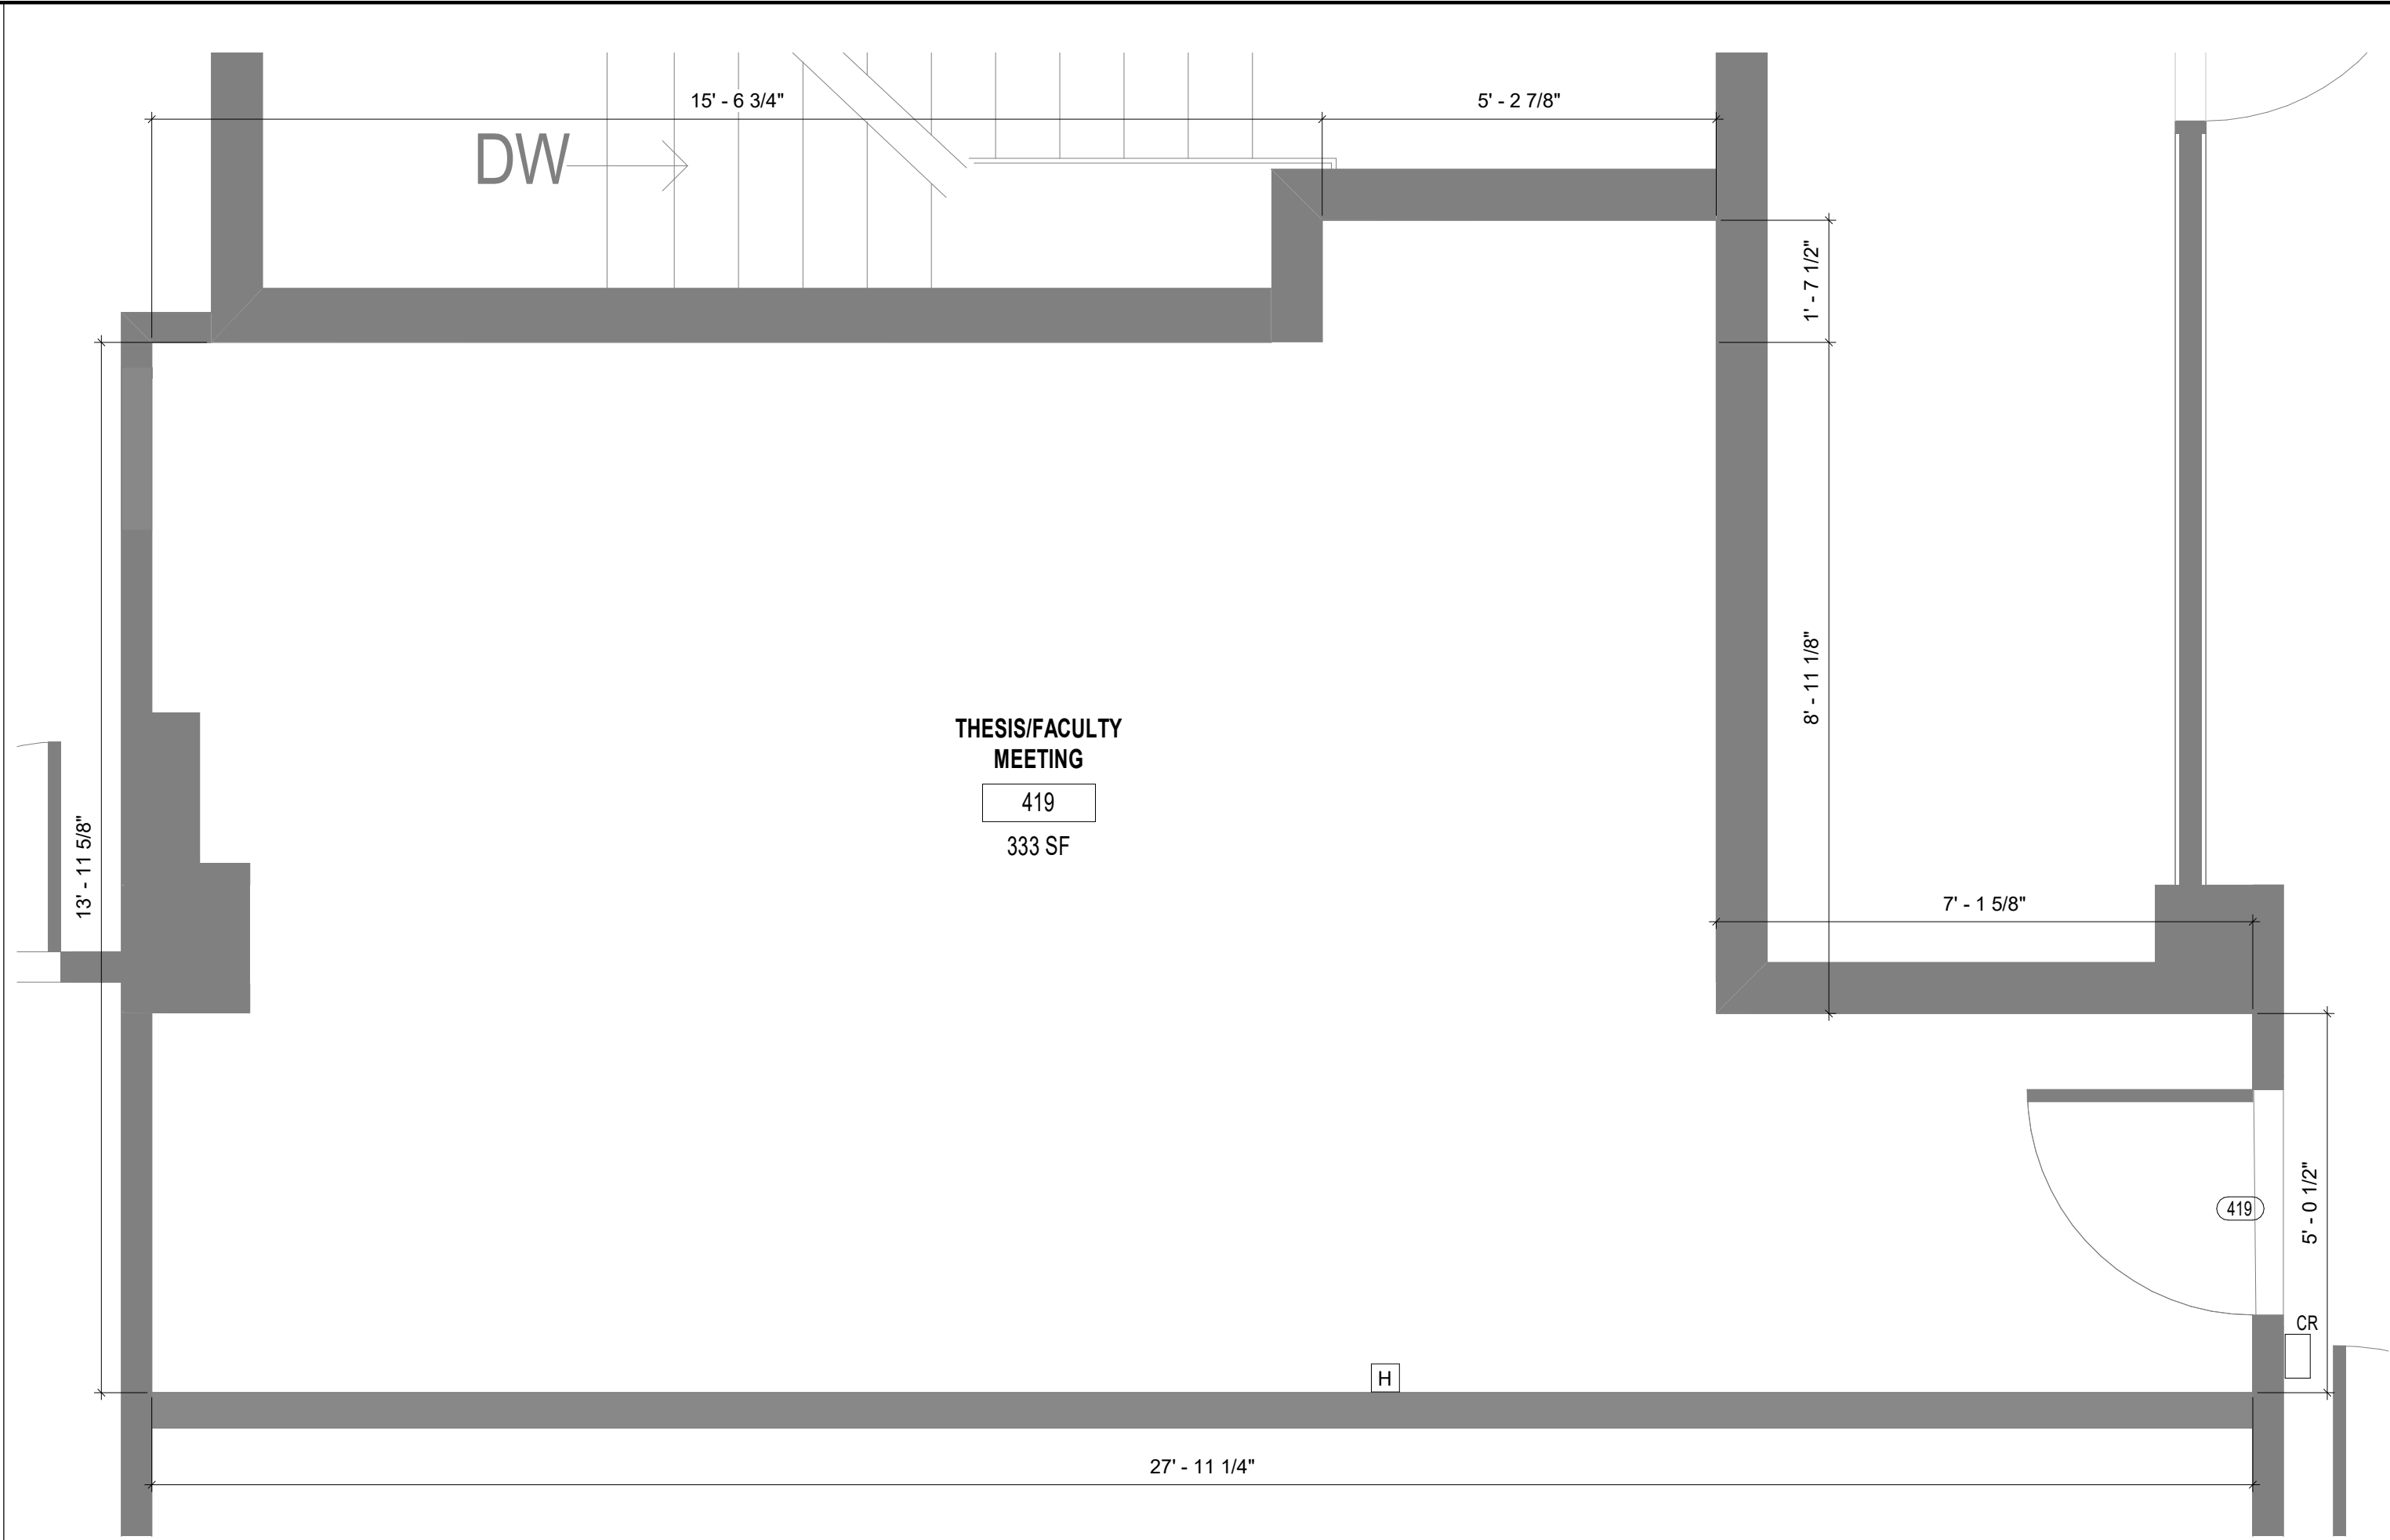

1	DEMO LEVEL 4 - ROOM 419
D1.1	1/2" = 1'-0"

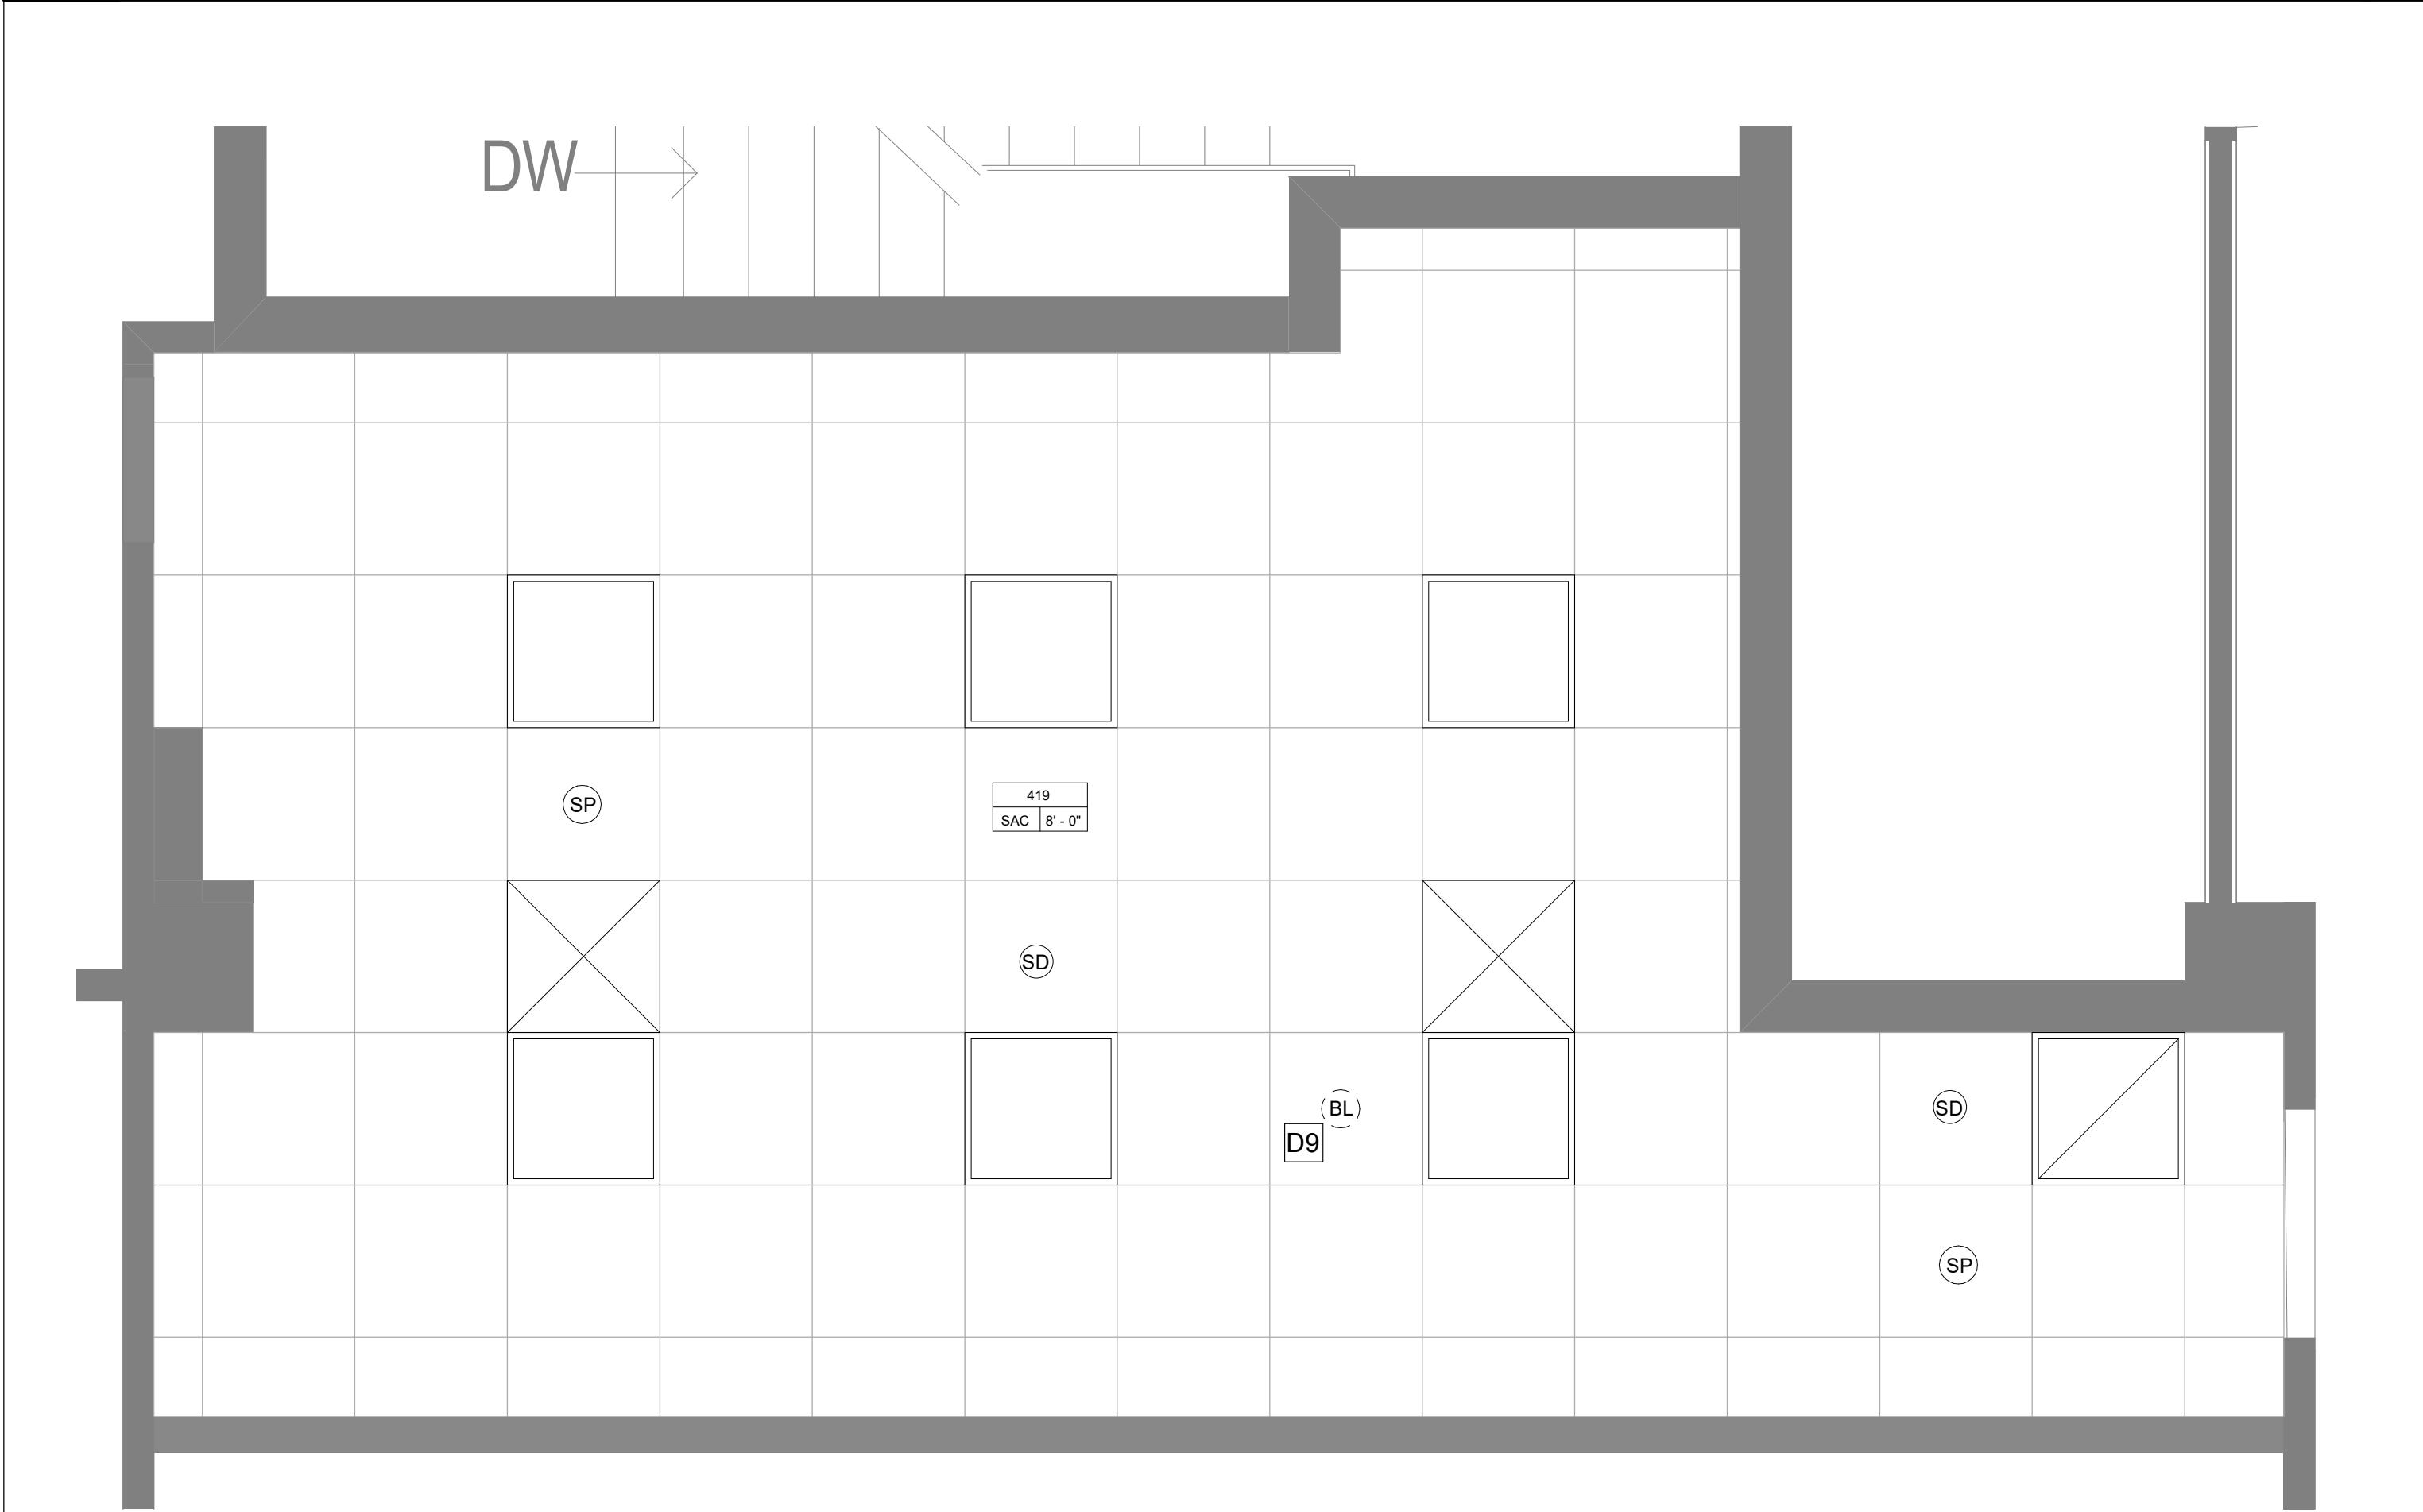

2	DEMO REFLECTED CEILING PLAN LEVEL 4 - ROOM 419
D1.1	1/2" = 1'-0"

NOTES

DEMOLITION LEGEND

SP

SD

BL

H

CR

EXISTING WALL TO REMAIN

EXISTING TO BE REMOVED

SPRINKLER

SMOKE DETECTOR

BLUE LIGHT

FIVE-HORN/ STROBE ALARM

CARD ACCESS

2X2 TROFFER

2X2 AIR SUPPLY PANEL

RETURN AIR GRILLE



FSU BELLAMY BUILDING

19480 Drawn By: KV - SL
Project Code Checked By: DB

9 NOVEMBER 2023


Date
CONTRACT DOCUMENTS

Revisions
△
△
△
△
△
△
△

DEMOLITION PLANS


DEMOLITION NOTES: SEE PLANS FOR SCOPE OF WORK

- D1
- EXISTING DOOR ASSEMBLY, HM FRAME AND ASSOCIATED HARDWARE TO BE REMOVED BY OTHERS.
- D2
- EXISTING CARPET FLOORING, RESILIENT WALL BASE AND VINYL ASBESTOS TILE BENEATH TO BE REMOVED AND REMEDIATED FOR ASBESTOS CONTAMINATION BY OTHERS. PREPARE EXITING FLOOR SLAB AS REQUIRED TO RECEIVE NEW FLOOR.
- D3
- EXISTING VINYL ASBESTOS TILE FLOORING AND WALL BASE TO BE REMOVED AND REMEDIATED FOR ASBESTOS CONTAMINATION BY OTHERS. PREPARE EXISTING FLOOR SLAB AS REQUIRED TO RECEIVE NEW FLOOR FINISHES.
- D4
- EXISTING MARKER BOARD TO BE REMOVED BY OTHERS.
- D5
- EXISTING WALL MOUNTED SMART BOARD TO BE REMOVED BY OTHERS.
- D6
- EXISTING INTERIOR GYP. BOARD LAYER TO BE REMOVED AND REMEDIATED FOR ASBESTOS CONTAMINATED BY OTHER. STUD WALL CAVITY TO BE DECONTAMINATED. EXTERIOR GYP. BOARD LAYER AND METAL STUDS TO REMAIN.
- D7
- EXISTING SUSPENDED CEILING WALL ANGLE TRACK AND ACOUSTICAL CEILING PANELS AT PERIMETER OF ROOM TO BE REMOVED BY OTHERS. REMAINING ACOUSTICAL CEILING SUSPENDED GRID PANELS, LIGHTS AND HVAC GRILLES TO BE REMOVED BY THE CONTRACTOR.
- D8
- CURTAIN ROD TO BE REMOVED BY OTHERS. CONTRACTOR TO REPAIR DRYWALL. EXISTING BLINDS TO BE REMOVED BY OTHERS.
- D9
- REMOVE BLUE LIGHT ALARM AND J. BOX AND CONDUIT.
- D10
- AT THE 3RD FLOOR THE EXISTING CEILING AND WALL GYPSUM WALLBOARD TO BE REMOVED BY OTHERS, FOR INSTALLATION OF PLUMBING PIPING FROM NEW 4TH FLOOR COFFEE BAR.
- D11
- REMOVE EXISTING CAMERA AND OUTLET AND CONDUIT.

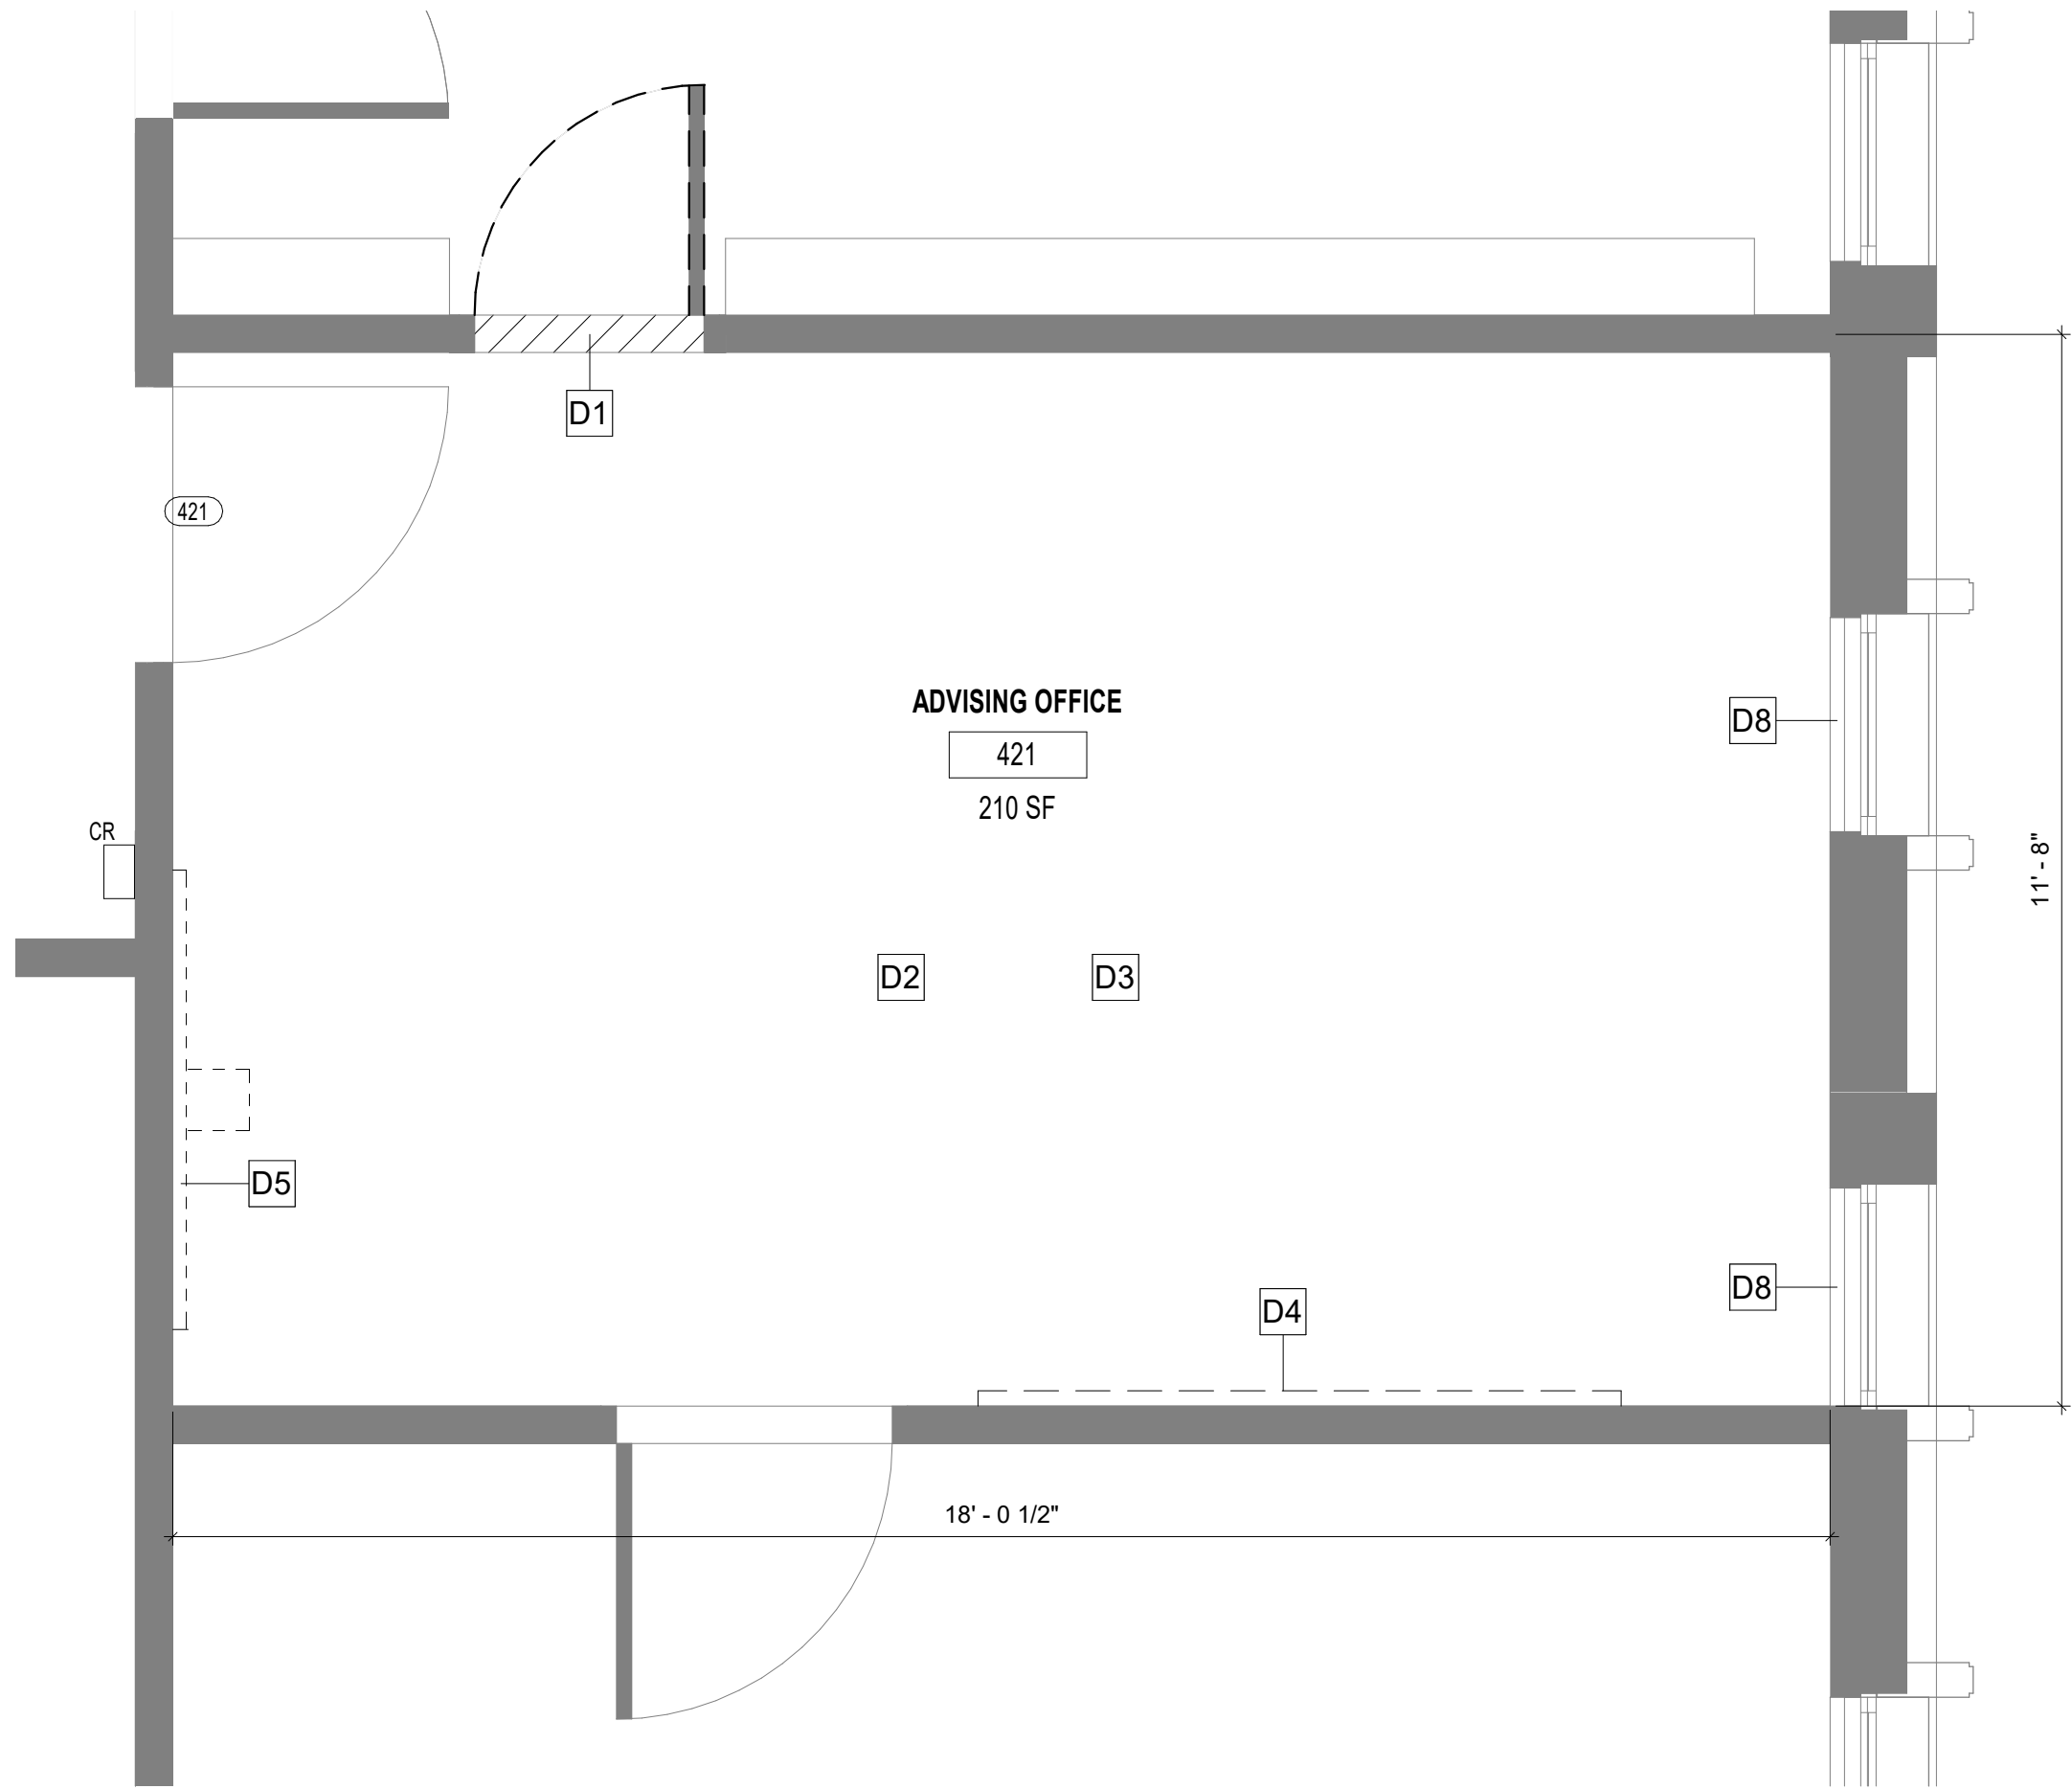

1 DEMO LEVEL 4 - ROOM 421

D1.2 1/2" = 1'-0"

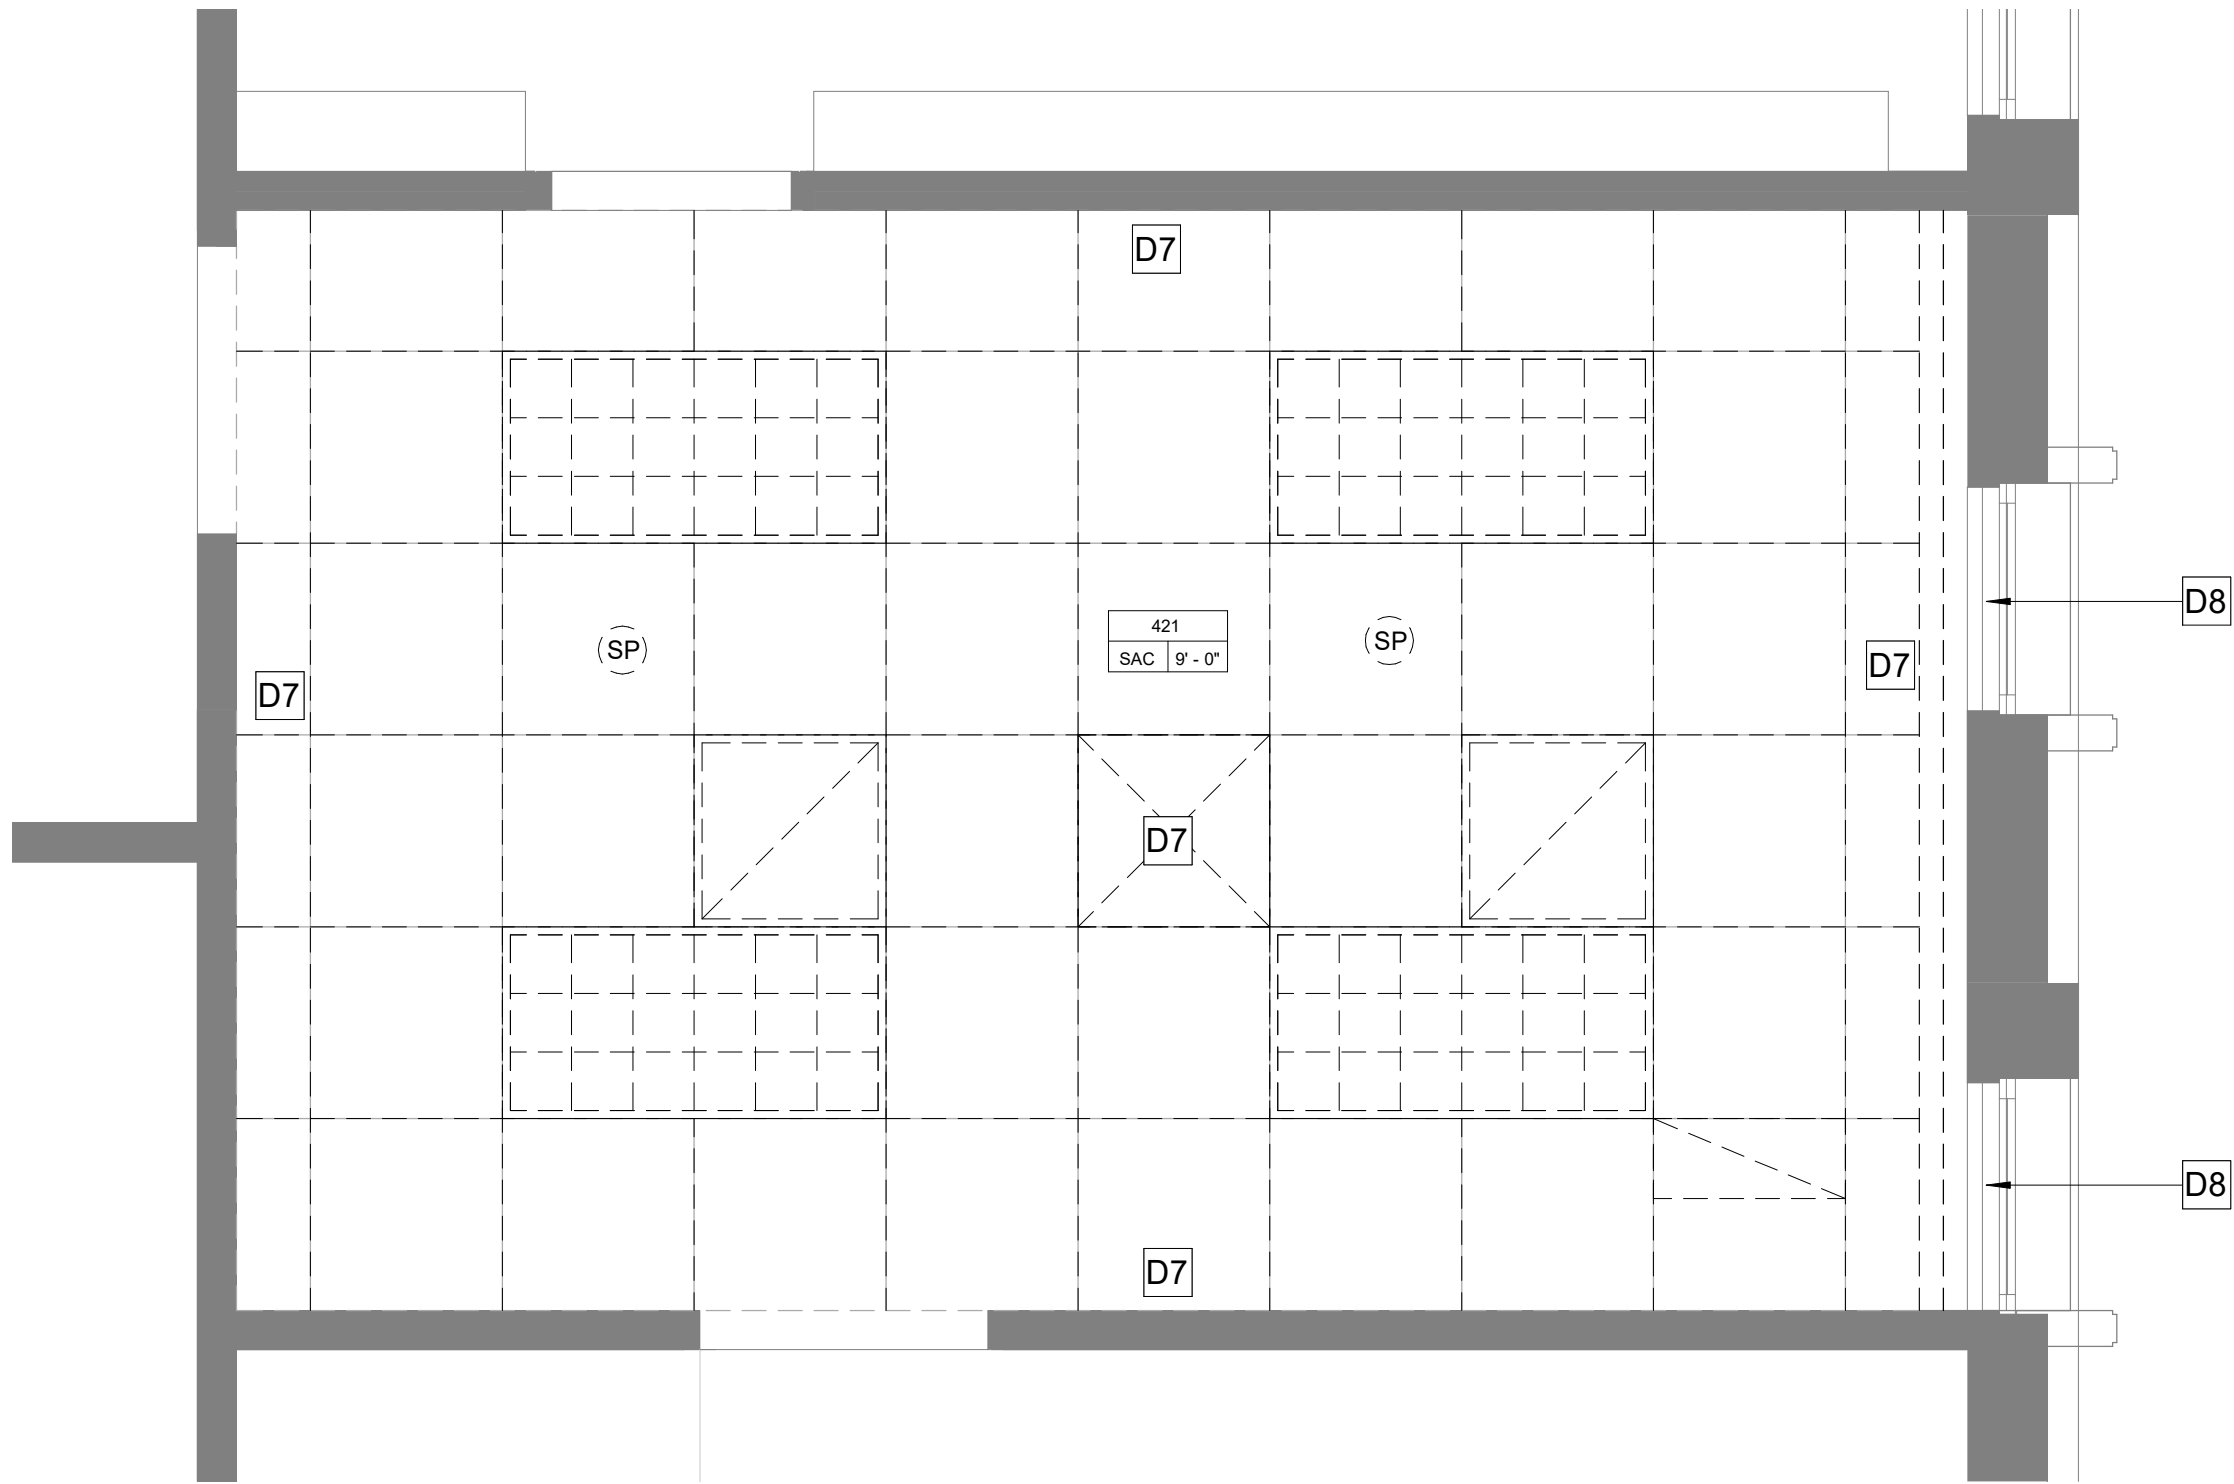

2 DEMO REFLECTED CEILING PLAN LEVEL 4 - ROOM 421

D1.2 1/2" = 1'-0"

NOTES

DEMOLITION LEGEND

- EXISTING WALL TO REMAIN
- EXISTING TO BE REMOVED
- SP

SPRINKLER
- SD

SMOKE DETECTOR
- BL

BLUE LIGHT
- CAM

CAMERA
- H

FIVE-HORN/ STROBE ALARM
- CR

CARD ACCESS
- 2X4 PARABOLIC TROFFER
- 2X2 AIR SUPPLY PANEL
- RETURN AIR GRILLE



FSU BELLAMY BUILDING

19480 Drawn By: KV - SL
Project Code Checked By: DB

9 NOVEMBER 2023
Date

CONTRACT DOCUMENTS

Revisions
△
△
△
△
△
△
△

DEMOLITION PLANS

Tallahassee Florida

D1.2

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978

DEMOLITION LEGEND

- EXISTING WALL TO REMAIN
- EXISTING TO BE REMOVED
- SP

SPRINKLER
- SD

SMOKE DETECTOR
- BL

BLUE LIGHT
- CAM

CAMERA
- H

FIVE-HORN/ STROBE ALARM
- CR

CARD ACCESS
- 2X4 PARABOLIC TROFFER
- 2X2 AIR SUPPLY PANEL
- RETURN AIR GRILLE

DEMOLITION NOTES: SEE PLANS FOR SCOPE OF WORK

- D1

EXISTING DOOR ASSEMBLY, HM FRAME AND ASSOCIATED HARDWARE TO BE REMOVED BY OTHERS.
- D2

EXISTING CARPET FLOORING, RESILIENT WALL BASE AND VINYL ASBESTOS TILE BENEATH TO BE REMOVED AND REMEDIATED FOR ASBESTOS CONTAMINATION BY OTHERS. PREPARE EXITING FLOOR SLAB AS REQUIRED TO RECEIVE NEW FLOOR.
- D3

EXISTING VINYL ASBESTOS TILE FLOORING AND WALL BASE TO BE REMOVED AND REMEDIATED FOR ASBESTOS CONTAMINATION BY OTHERS. PREPARE EXISTING FLOOR SLAB AS REQUIRED TO RECEIVE NEW FLOOR FINISHES.
- D4

EXISTING MARKER BOARD TO BE REMOVED BY OTHERS.
- D5

EXISTING WALL MOUNTED SMART BOARD TO BE REMOVED BY OTHERS.
- D6

EXISTING INTERIOR GYP. BOARD LAYER TO BE REMOVED AND REMEDIATED FOR ASBESTOS CONTAMINATED BY OTHER. STUD WALL CAVITY TO BE DECONTAMINATED. EXTERIOR GYP. BOARD LAYER AND METAL STUDS TO REMAIN.
- D7

EXISTING SUSPENDED CEILING WALL ANGLE TRACK AND ACOUSTICAL CEILING PANELS AT PERIMETER OF ROOM TO BE REMOVED BY OTHERS. REMAINING ACOUSTICAL CEILING SUSPENDED GRID PANELS, LIGHTS AND HVAC GRILLES TO BE REMOVED BY THE CONTRACTOR.
- D8

CURTAIN ROD TO BE REMOVED BY OTHERS. CONTRACTOR TO REPAIR DRYWALL. EXISTING BLINDS TO BE REMOVED BY OTHERS.
- D9

REMOVE BLUE LIGHT ALARM AND J. BOX AND CONDUIT.
- D10


AT THE 3RD FLOOR THE EXISTING CEILING AND WALL GYPSUM WALLBOARD TO BE REMOVED BY OTHERS, FOR INSTALLATION OF PLUMBING PIPING FROM NEW 4TH FLOOR COFFEE BAR.
- D11

REMOVE EXISTING CAMERA AND OUTLET AND CONDUIT.
- D12

EXISTING GYPSUM WALLBOARD AT 3RD FLOOR RESTROOM VESTIBULE AND JANITOR CLOSET CEILINGS AND WALLS TO BE REMOVED AND REMEDIATED FOR ASBESTOS CONTAMINATION BY OTHERS. GENERAL CONTRACTOR TO COORDINATE LOCATION AND ROUTING OF NEW WATER AND SANITARY LINE TO ROOM 430 WITH ABATEMENT CONTRACTOR.
-
-
- 2 DEMO REFLECTED CEILING PLAN LEVEL 4 - ROOM 430
- D1.3 1/2" = 1'-0"
- Copyright Barnett Fronczak Barlowe & Shuler, Architects. All rights Reserved
- 1 DEMO LEVEL 4 - ROOM 430
- D1.3 1/2" = 1'-0"
- FSU BELLAMY BUILDING
- 19480 Drawn By: KV - SL
Project Code Checked By: DB
- 9 NOVEMBER 2023
- Date
- CONTRACT DOCUMENTS
- Revisions
- ▲
▲
▲
▲
▲
▲
▲
- DEMOLITION PLANS
- Tallahassee Florida
- D1.3
- 2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978

NEW CONSTRUCTION NOTES: SEE PLANS FOR SCOPE OF WORK

- 1
- INFILL PREVIOUS DOOR OPENING WITH PARTITION WALL CONSTRUCTION TO MATCH ADJACENT WALL. FINISH NEW CONSTRUCTION IN EACH ROOM.
- 2
- PROVIDE NEW FIRE-RATED FLUSH WOOD DOOR ASSEMBLY WITH HOLLOW METAL FRAME AND ASSOCIATED HARDWARE. SEE DOOR AND HARDWARE SCHEDULE FOR ADDITIONAL REQUIREMENTS. PAINT DOOR FRAME. DOOR VENEER AND STAIN TO MATCH EXISTING.
- 3
- PROVIDE NEW MODULAR CARPET FLOORING AND RESILIENT WALL BASE THROUGHOUT. INSTALL CARPET IN VERTICAL ASHLAR PATTERN, ORIENTED EAST TO WEST. SEE SPECIFICATION, FINISH AND COLOR SCHEDULE FOR ADDITIONAL REQUIREMENTS.
- 4
- PAINT ALL INTERIOR PARTITIONS AS REQUIRED. SEE SPECIFICATIONS, FINISH AND COLOR SCHEDULE. REPAIR DRYWALL AS REQUIRED.
- 5
- SEAL ALL PENETRATIONS AND JOINTS OF PARTITION WALLS INDICATED TO COMPLY WITH 1-HOUR FIRE-RATING REQUIREMENTS, TYP.
- 6
- NEW FURNISHINGS PROVIDED BY DEPARTMENT.
- 7
- PROVIDE NEW 24" DEPTH BASE CABINETRY WITH SOLID SURFACE COUNTERTOP, BACKSPLASH AND ENDSPLASHES AS INDICATED. SEE ELEVATIONS AND SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
- 8
- PROVIDE NEW UPPER CABINETS TO MATCH BASE CABINETS.
- 9
- PROVIDE NEW SUSPENDED ACOUSTICAL CEILING SYSTEM AS INDICATED. SEE SPECIFICATIONS. INSTALL 3/4" SHADOW MOLDING AT WALLS.
- 10
- PROVIDE NEW 8'X4' GLASS MARKER BOARD AT LOCATION INDICATED.
- 11
- PROVIDE NEW 5/8" TYPE 'X' GYPSUM BOARD LAYER AT INTERIOR ELEVATION INDICATED. INSTALL OVER EXISTING METAL STUDS AND FULL HEIGHT WHERE 1 HOUR FIRE-RATING IS REQUIRED, TYP. INSTALL 3-1/2" FIBERGLASS BATT INSULATION STUDS.
- 12
- INSTALL NEW LIGHTS AND HVAC GRILLES.
- 13
- CLEAN CARPET AND WALL BASE.
- 14
- CLEAN EXISTING LIGHT FIXTURES, HVAC GRILLES, FIRE SPRINKLER, ETC.
- 15
- PROVIDE BLOCKING FOR FUTURE TV MONITOR.
- 16
- INSTALL WALL BASE TO MATCH EXISTING .
- 17
- INSTALL NEW 2'-4"W X 10'-0"L ALUMINUM BLINDS 1" ALUMINUM BLIND SLATS WITH PULL CORDS.
- 18
- REPAIR CEILING SOFFIT AND PREP FOR NEW ALUMINUM BLINDS.
- 19
- SAND AND REFINISH DOOR TO MATCH EXISTING.
- 20
- INSTALL NEW PLUMBING ABOVE 3RD FLOOR CEILING. INSTALL NEW 5/8" GYPSUM DRYWALL AT CEILING AND PAINT TO MATCH EXISTING CEILING. REPAIR EXISTING GYPSUM WALL BOARD AT WALLS AND PAINT TO MATCH EXISTING.
- 21
- RELOCATED FIRE STROBE/HORN.
- 22
- REMOVE DRINKING FOUNTAIN AND REPLACE WITH NEW DRINK FOUNTAIN. BID AS ALTERNATE.
- 23
- INSTALL NEW CEILING PANEL 2X2 TO MATCH EXISTING.
- 24
- INSTALL NEW 5/8" TYPE X GYPSUM WALLBOARD AND 3-1/2" FIBERGLASS INSULATION.
- 25
- SAND AND REFINISH EXISTING DOOR AND INSTALL NEW CLOSURE.

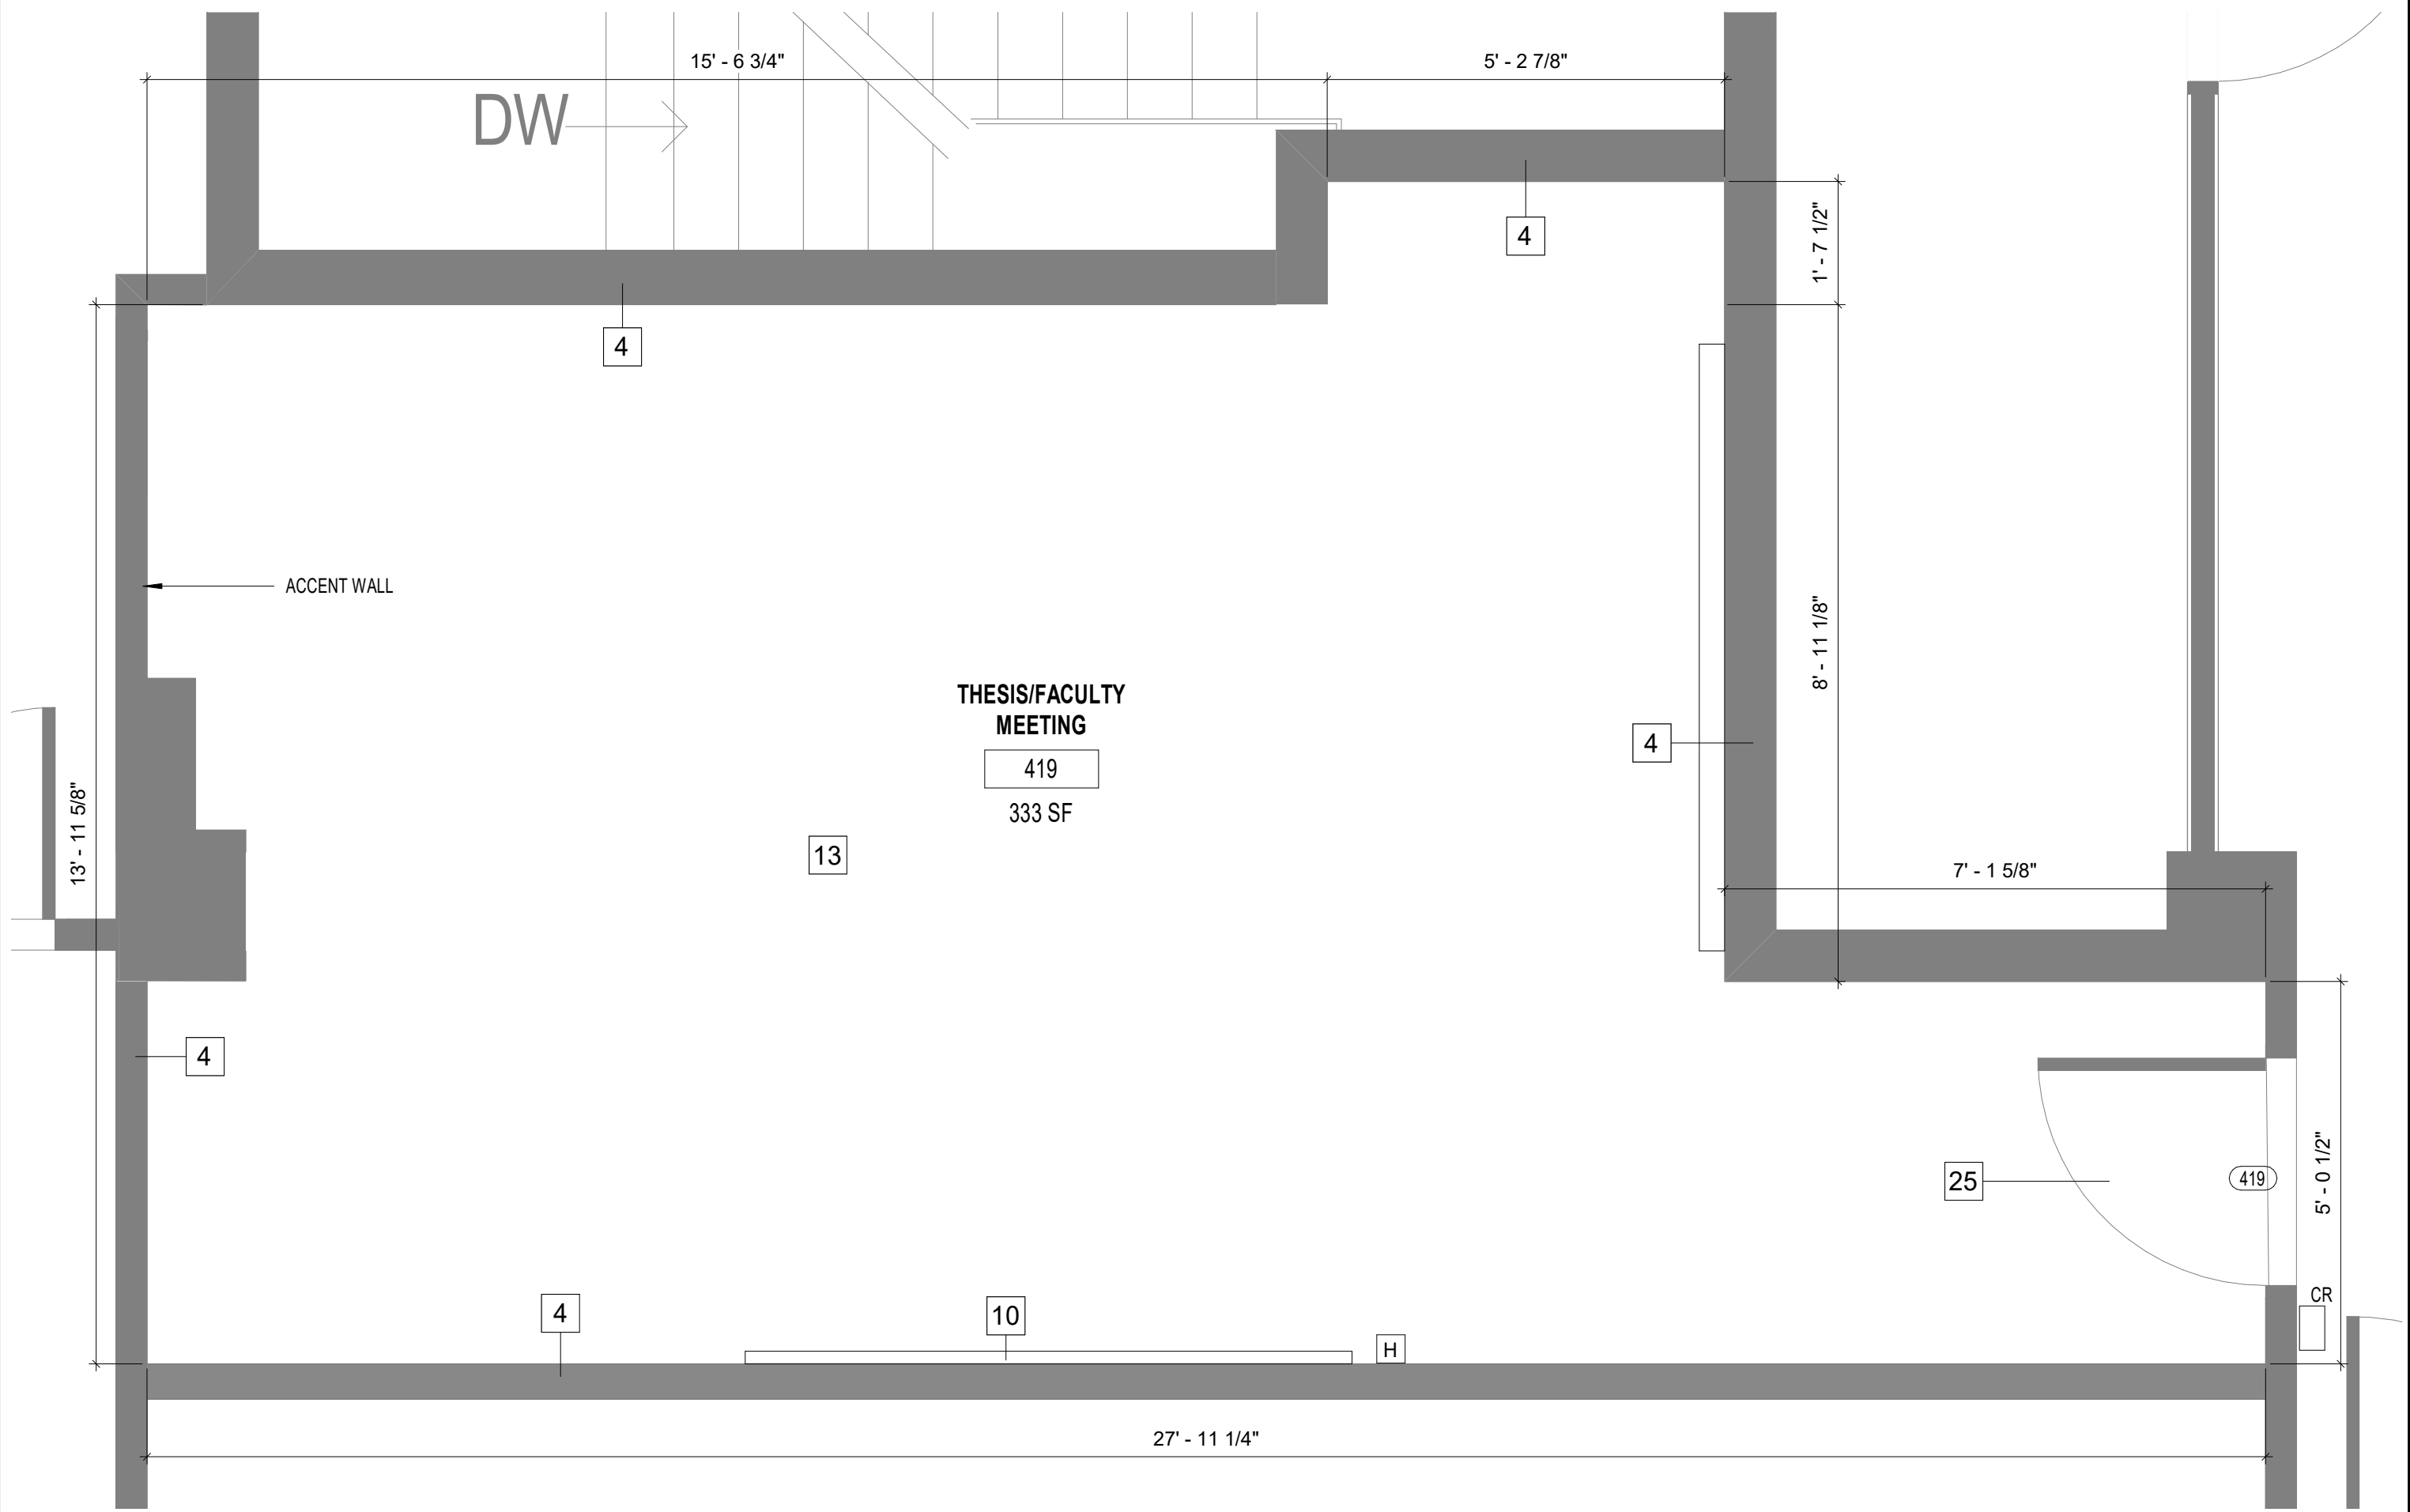


1

NEW LEVEL 4 - ROOM 419

A1.1

1/2" = 1'-0"

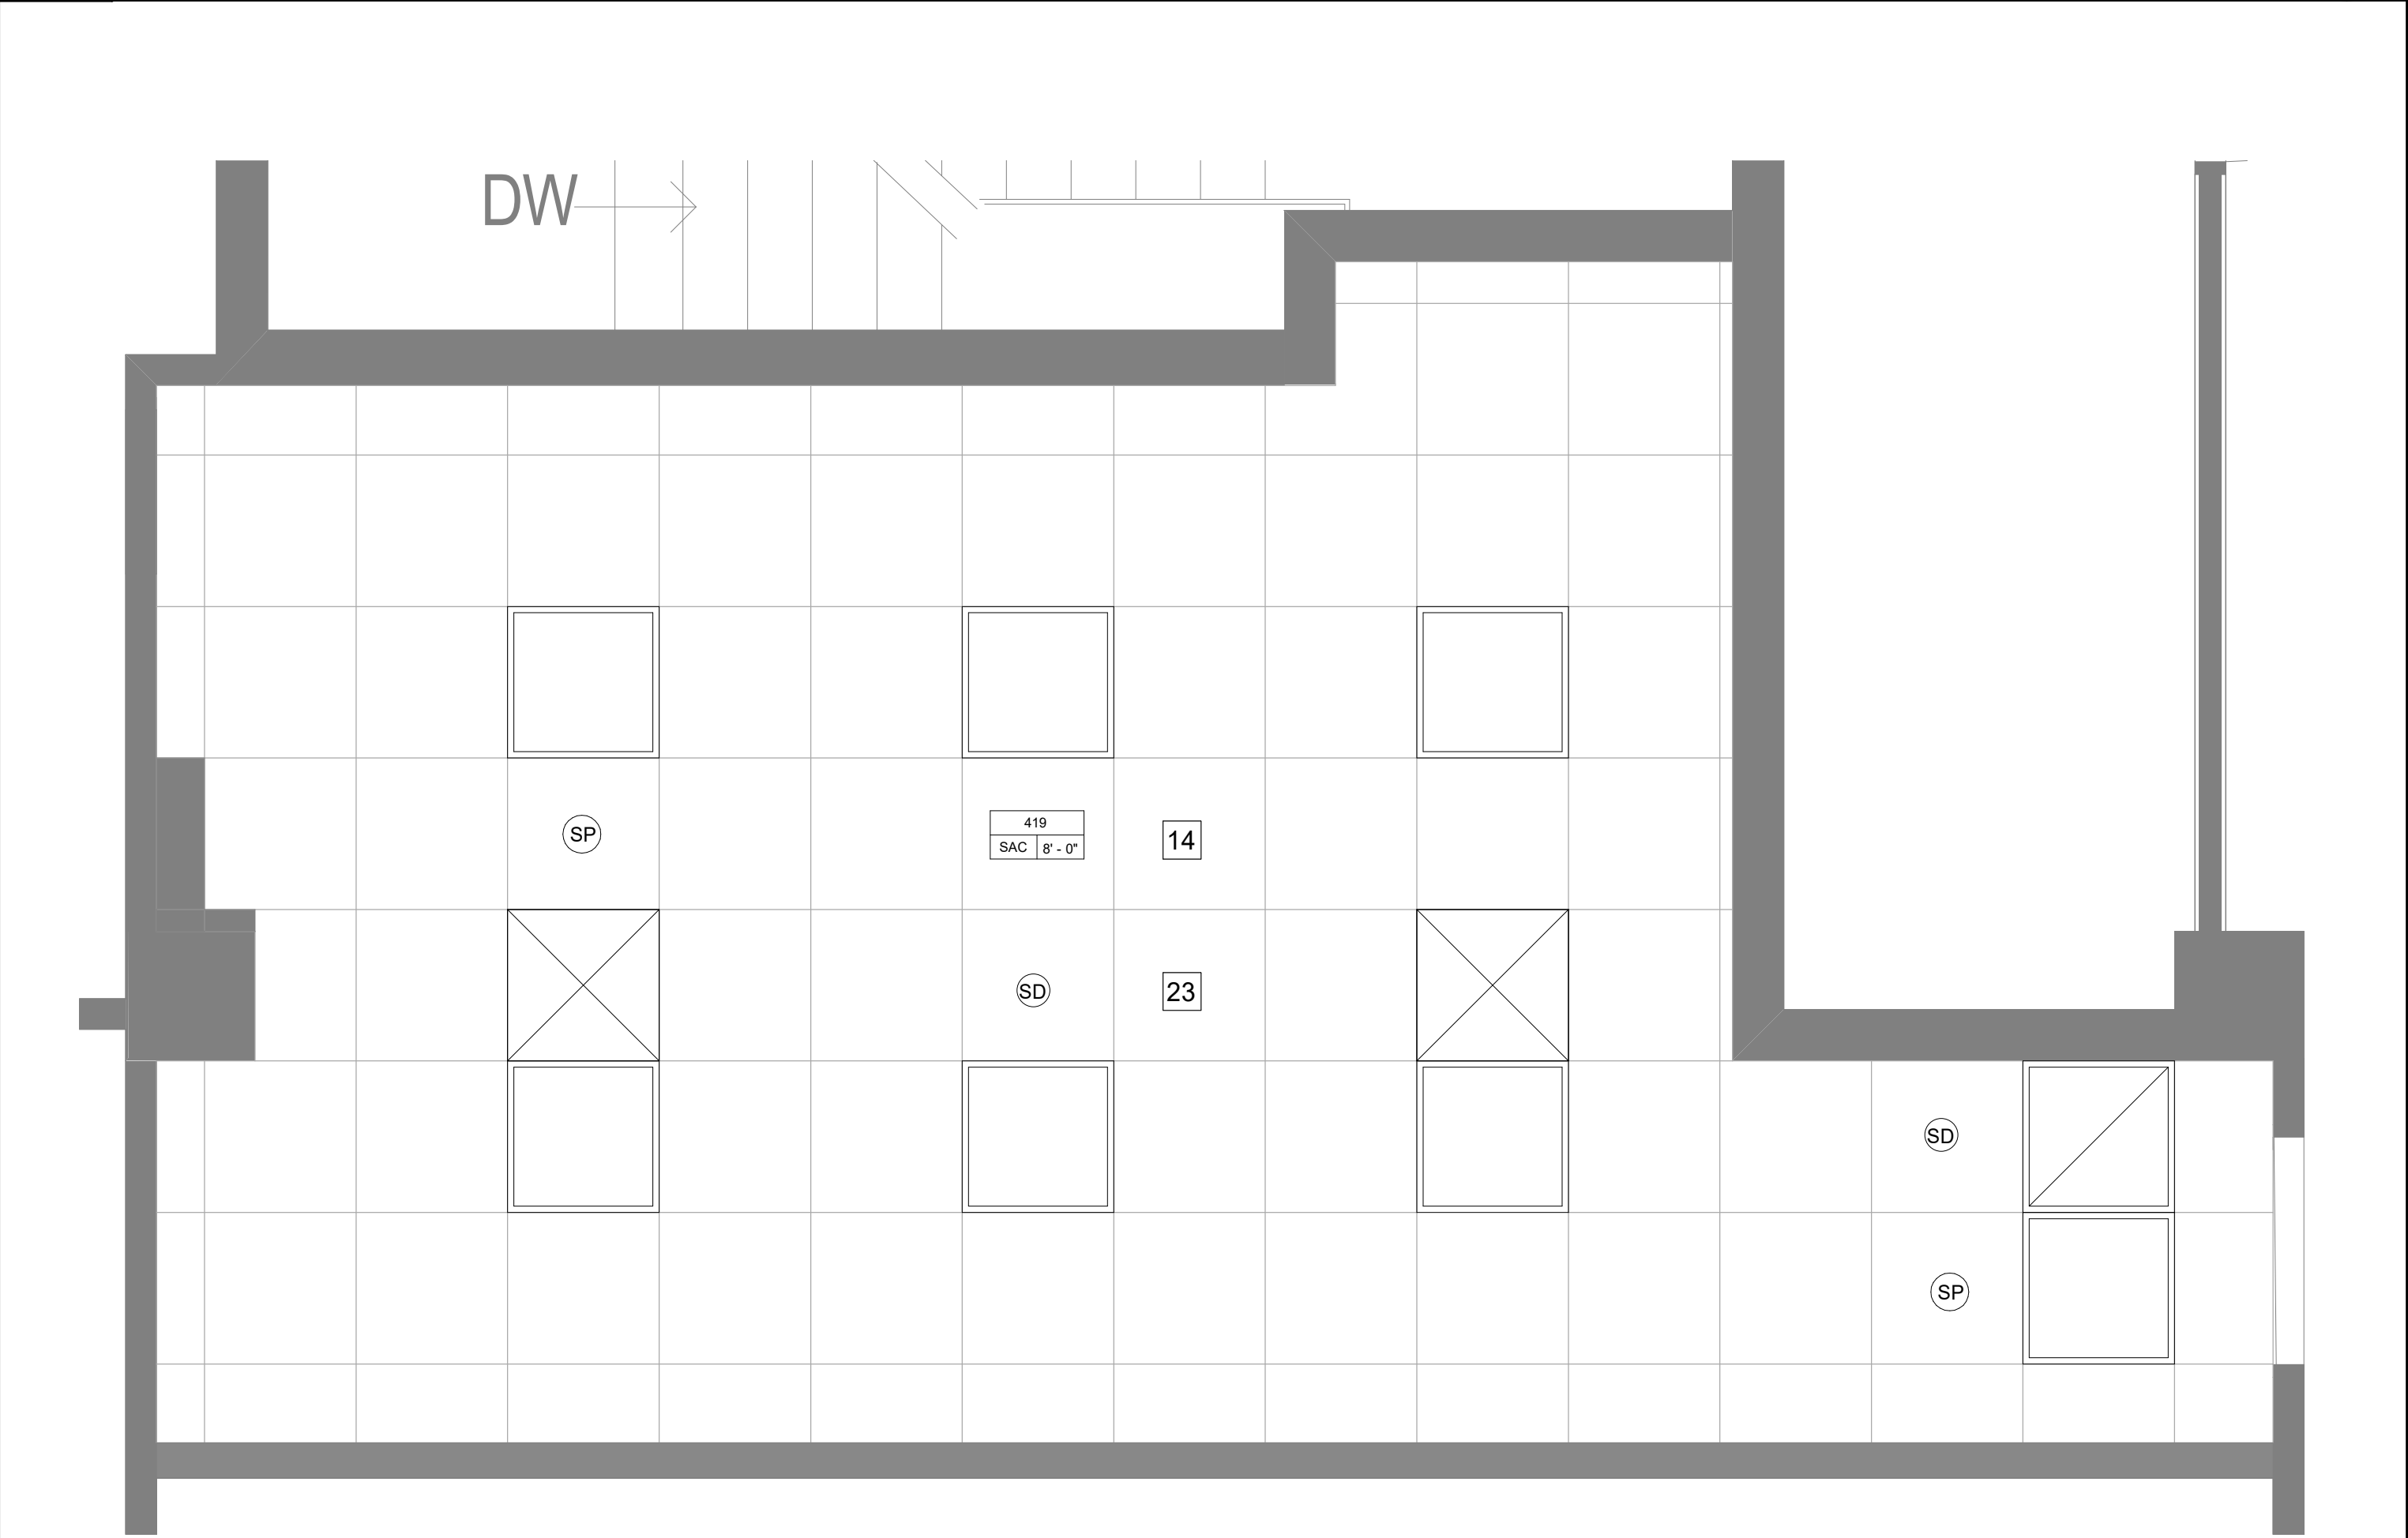

2

NEW REFLECTED CEILING PLAN LEVEL 4 - ROOM 419

A1.1

1/2" = 1'-0"

NOTES

FLOOR PLAN LEGEND

Name	ROOM NAME AND NUMBER
101	
SP	SPRINKLER
SD	SMOKE DETECTOR
BL	BLUE LIGHT
H	FIVE-HORN/ STROBE ALARM
CR	CARD ACCESS
	2X2 TROFFER
	2X2 EMERGENCY TROFFER
	2X2 CEILING DIFFUSER
	RETURN AIR GRILLE
	INFILL DOOR OPENING



FSU BELLAMY BUILDING

19480 Drawn By: KV
Project Code Checked By: DB

9 NOVEMBER 2023

Date

CONTRACT DOCUMENTS

Revisions

△
△
△
△
△
△
△

NEW PLANS

Tallahassee Florida


A1.1

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978


NEW CONSTRUCTION NOTES:

SEE PLANS FOR SCOPE OF WORK

- 1 INFILL PREVIOUS DOOR OPENING WITH PARTITION WALL CONSTRUCTION TO MATCH ADJACENT WALL. FINISH NEW CONSTRUCTION IN EACH ROOM.
- 2 PROVIDE NEW FIRE-RATED FLUSH WOOD DOOR ASSEMBLY WITH HOLLOW METAL FRAME AND ASSOCIATED HARDWARE. SEE DOOR AND HARDWARE SCHEDULE FOR ADDITIONAL REQUIREMENTS. PAINT DOOR FRAME. DOOR VENEER AND STAIN TO MATCH EXISTING.
- 3 PROVIDE NEW MODULAR CARPET FLOORING AND RESILIENT WALL BASE THROUGHOUT. INSTALL CARPET IN VERTICAL ASHLAR PATTERN, ORIENTED EAST TO WEST. SEE SPECIFICATION, FINISH AND COLOR SCHEDULE FOR ADDITIONAL REQUIREMENTS.
- 4 PAINT ALL INTERIOR PARTITIONS AS REQUIRED. SEE SPECIFICATIONS, FINISH AND COLOR SCHEDULE. REPAIR DRYWALL AS REQUIRED.
- 5 SEAL ALL PENETRATIONS AND JOINTS OF PARTITION WALLS INDICATED TO COMPLY WITH 1-HOUR FIRE-RATING REQUIREMENTS, TYP.
- 6 NEW FURNISHINGS PROVIDED BY DEPARTMENT.
- 7 PROVIDE NEW 24" DEPTH BASE CABINETRY WITH SOLID SURFACE COUNTERTOP, BACKSPLASH AND ENDSPLASHES AS INDICATED. SEE ELEVATIONS AND SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
- 8 PROVIDE NEW UPPER CABINETS TO MATCH BASE CABINETS.
- 9 PROVIDE NEW SUSPENDED ACOUSTICAL CEILING SYSTEM AS INDICATED. SEE SPECIFICATIONS. INSTALL 3/4" SHADOW MOLDING AT WALLS.
- 10 PROVIDE NEW 8'X4' GLASS MARKER BOARD AT LOCATION INDICATED.
- 11 PROVIDE NEW 5/8" TYPE 'X' GYPSUM BOARD LAYER AT INTERIOR ELEVATION INDICATED. INSTALL OVER EXISTING METAL STUDS AND FULL HEIGHT WHERE 1 HOUR FIRE-RATING IS REQUIRED, TYP. INSTALL 3-1/2" FIBERGLASS BATT INSULATION STUDS.
- 12 INSTALL NEW LIGHTS AND HVAC GRILLES.
- 13 CLEAN CARPET AND WALL BASE.
- 14 CLEAN EXISTING LIGHT FIXTURES, HVAC GRILLES, FIRE SPRINKLER, ETC.
- 15 PROVIDE BLOCKING FOR FUTURE TV MONITOR.
- 16 INSTALL WALL BASE TO MATCH EXISTING .
- 17 INSTALL NEW 2'-4"W X 10'-0"L ALUMINUM BLINDS 1" ALUMINUM BLIND SLATS WITH PULL CORDS.
- 18 REPAIR CEILING SOFFIT AND PREP FOR NEW ALUMINUM BLINDS.
- 19 SAND AND REFINISH DOOR TO MATCH EXISTING.
- 20 INSTALL NEW PLUMBING ABOVE 3RD FLOOR CEILING. INSTALL NEW 5/8" GYPSUM DRYWALL AT CEILING AND PAINT TO MATCH EXISTING CEILING. REPAIR EXISTING GYPSUM WALL BOARD AT WALLS AND PAINT TO MATCH EXISTING.
- 21 RELOCATED FIRE STROBE/HORN.
- 22 REMOVE DRINKING FOUNTAIN AND REPLACE WITH NEW DRINK FOUNTAIN. BID AS ALTERNATE.
- 23 INSTALL NEW CEILING PANEL 2X2 TO MATCH EXISTING.
- 24 INSTALL NEW 5/8" TYPE X GYPSUM WALLBOARD AND 3-1/2" FIBERGLASS INSULATION.
- 25 SAND AND REFINISH EXISTING DOOR AND INSTALL NEW CLOSURE.

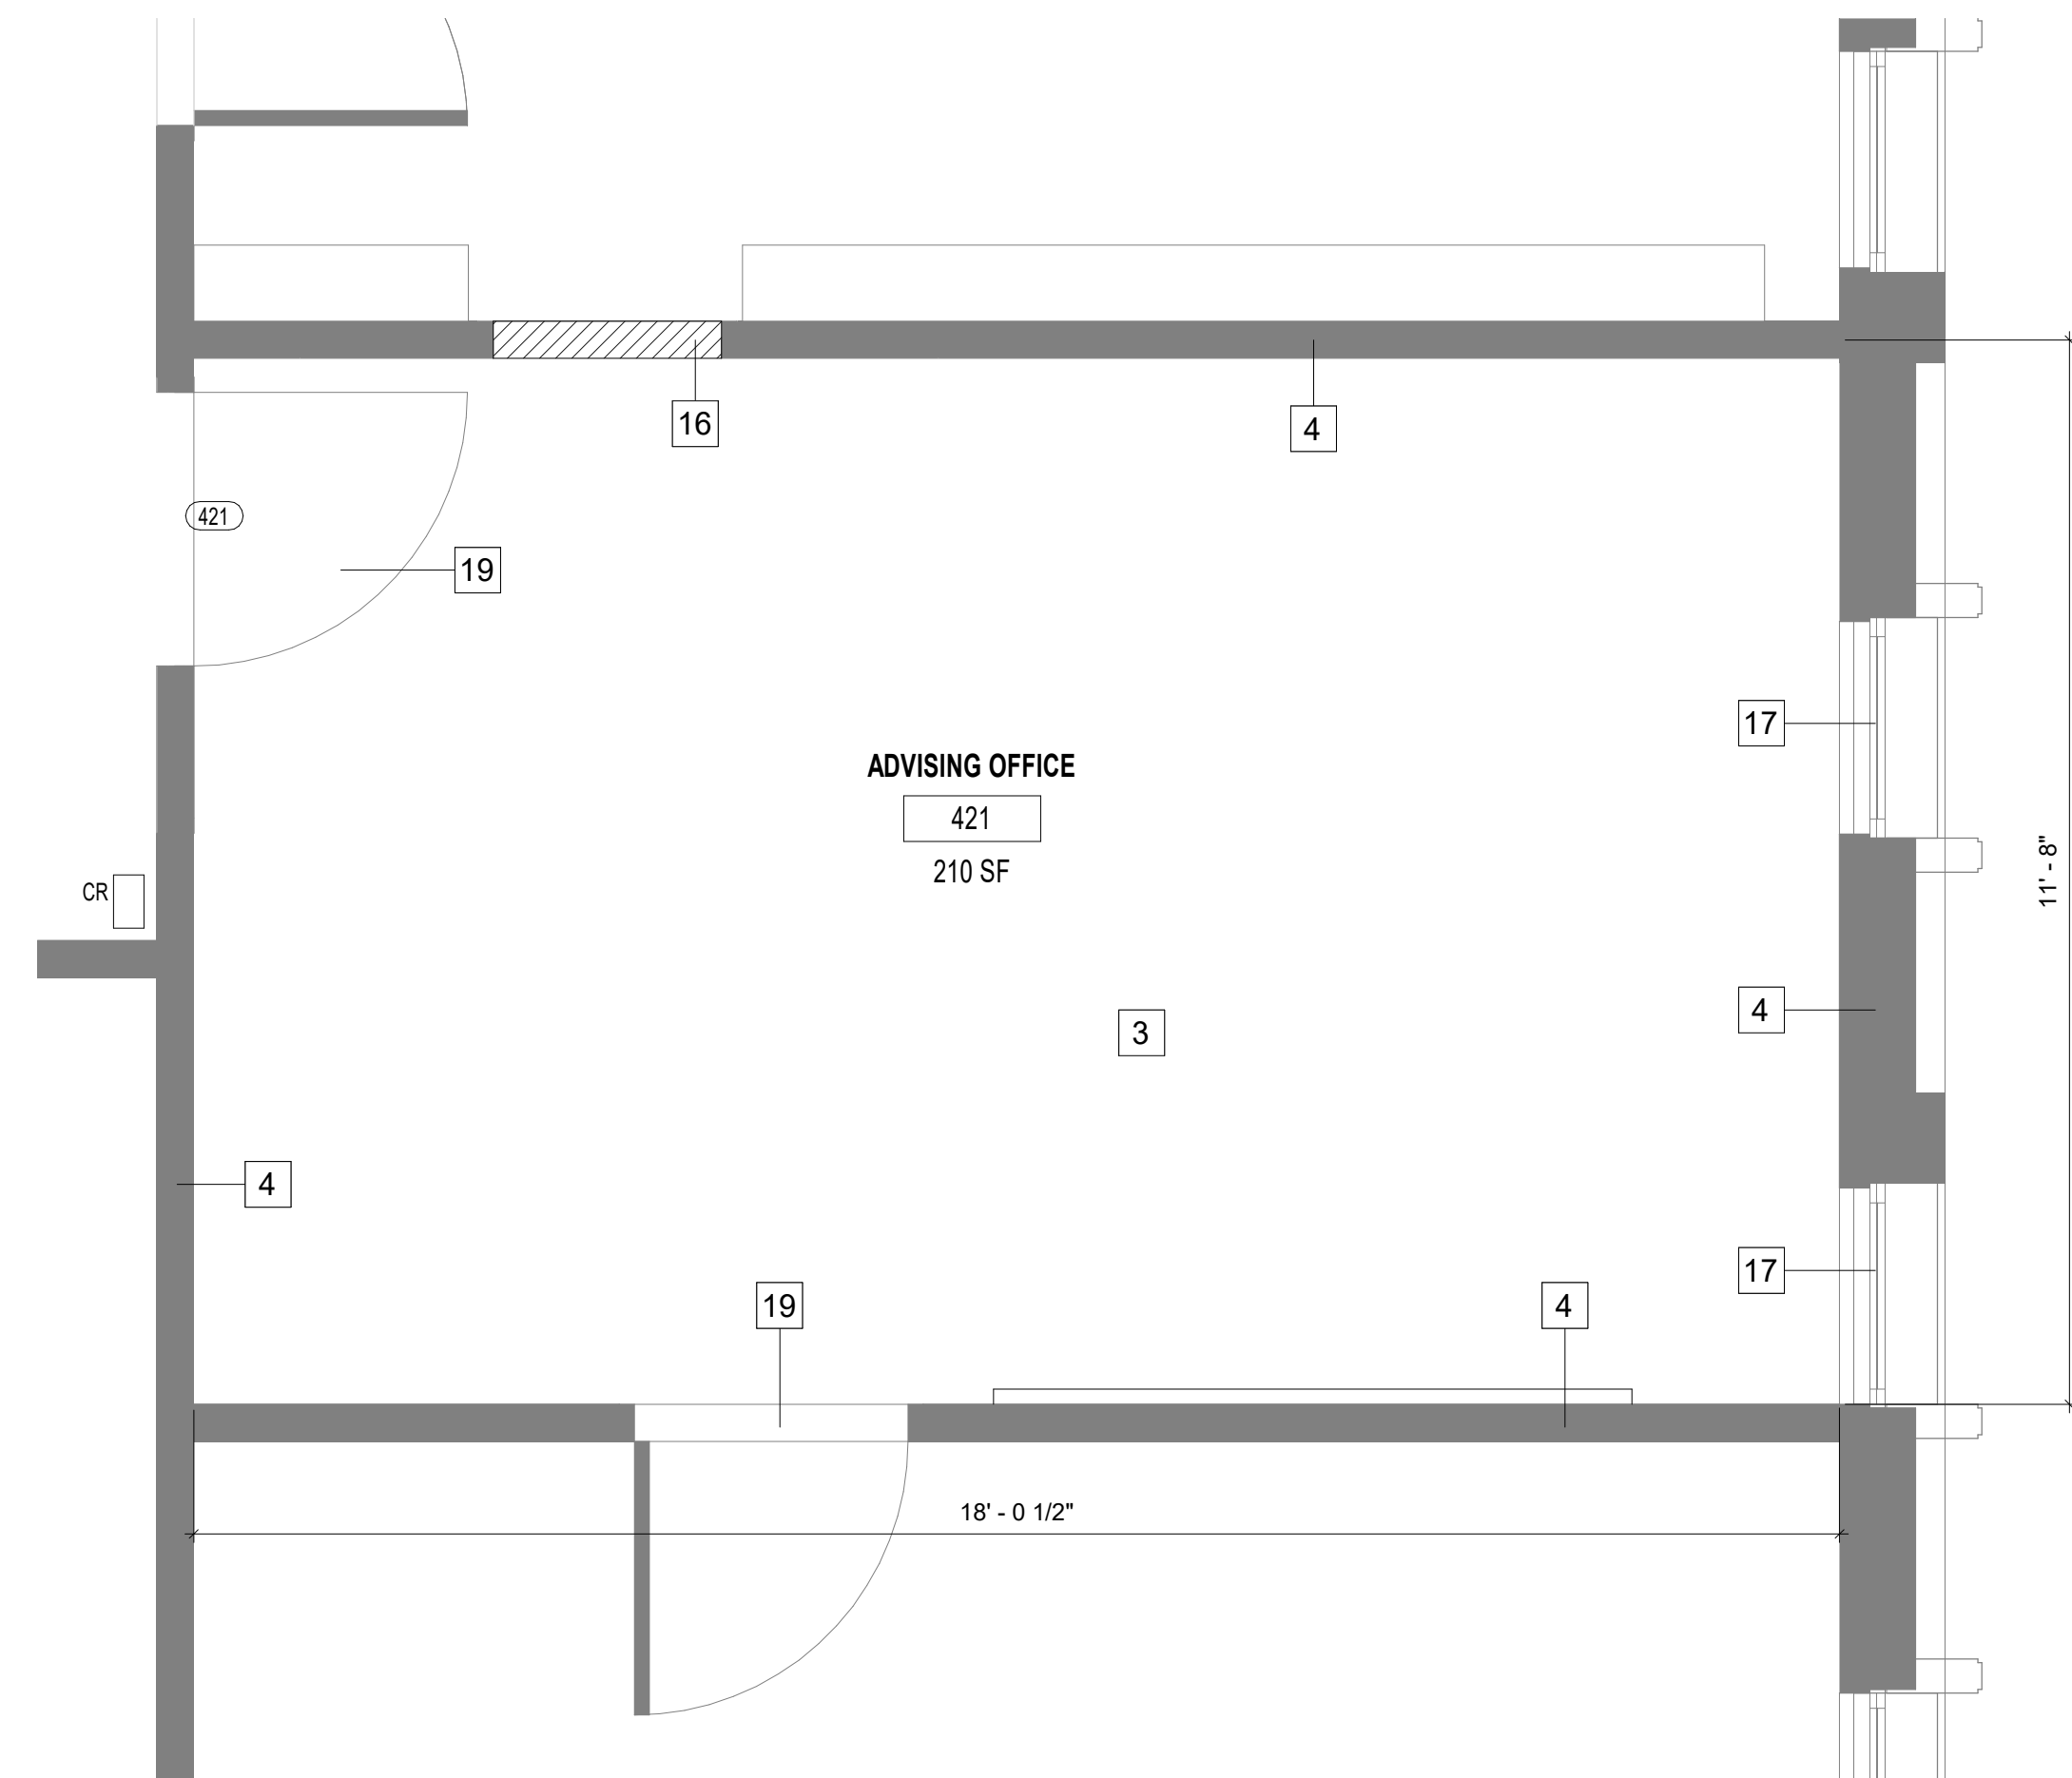

1	NEW LEVEL 4 - ROOM 421
A1.2	1/2" = 1'-0"

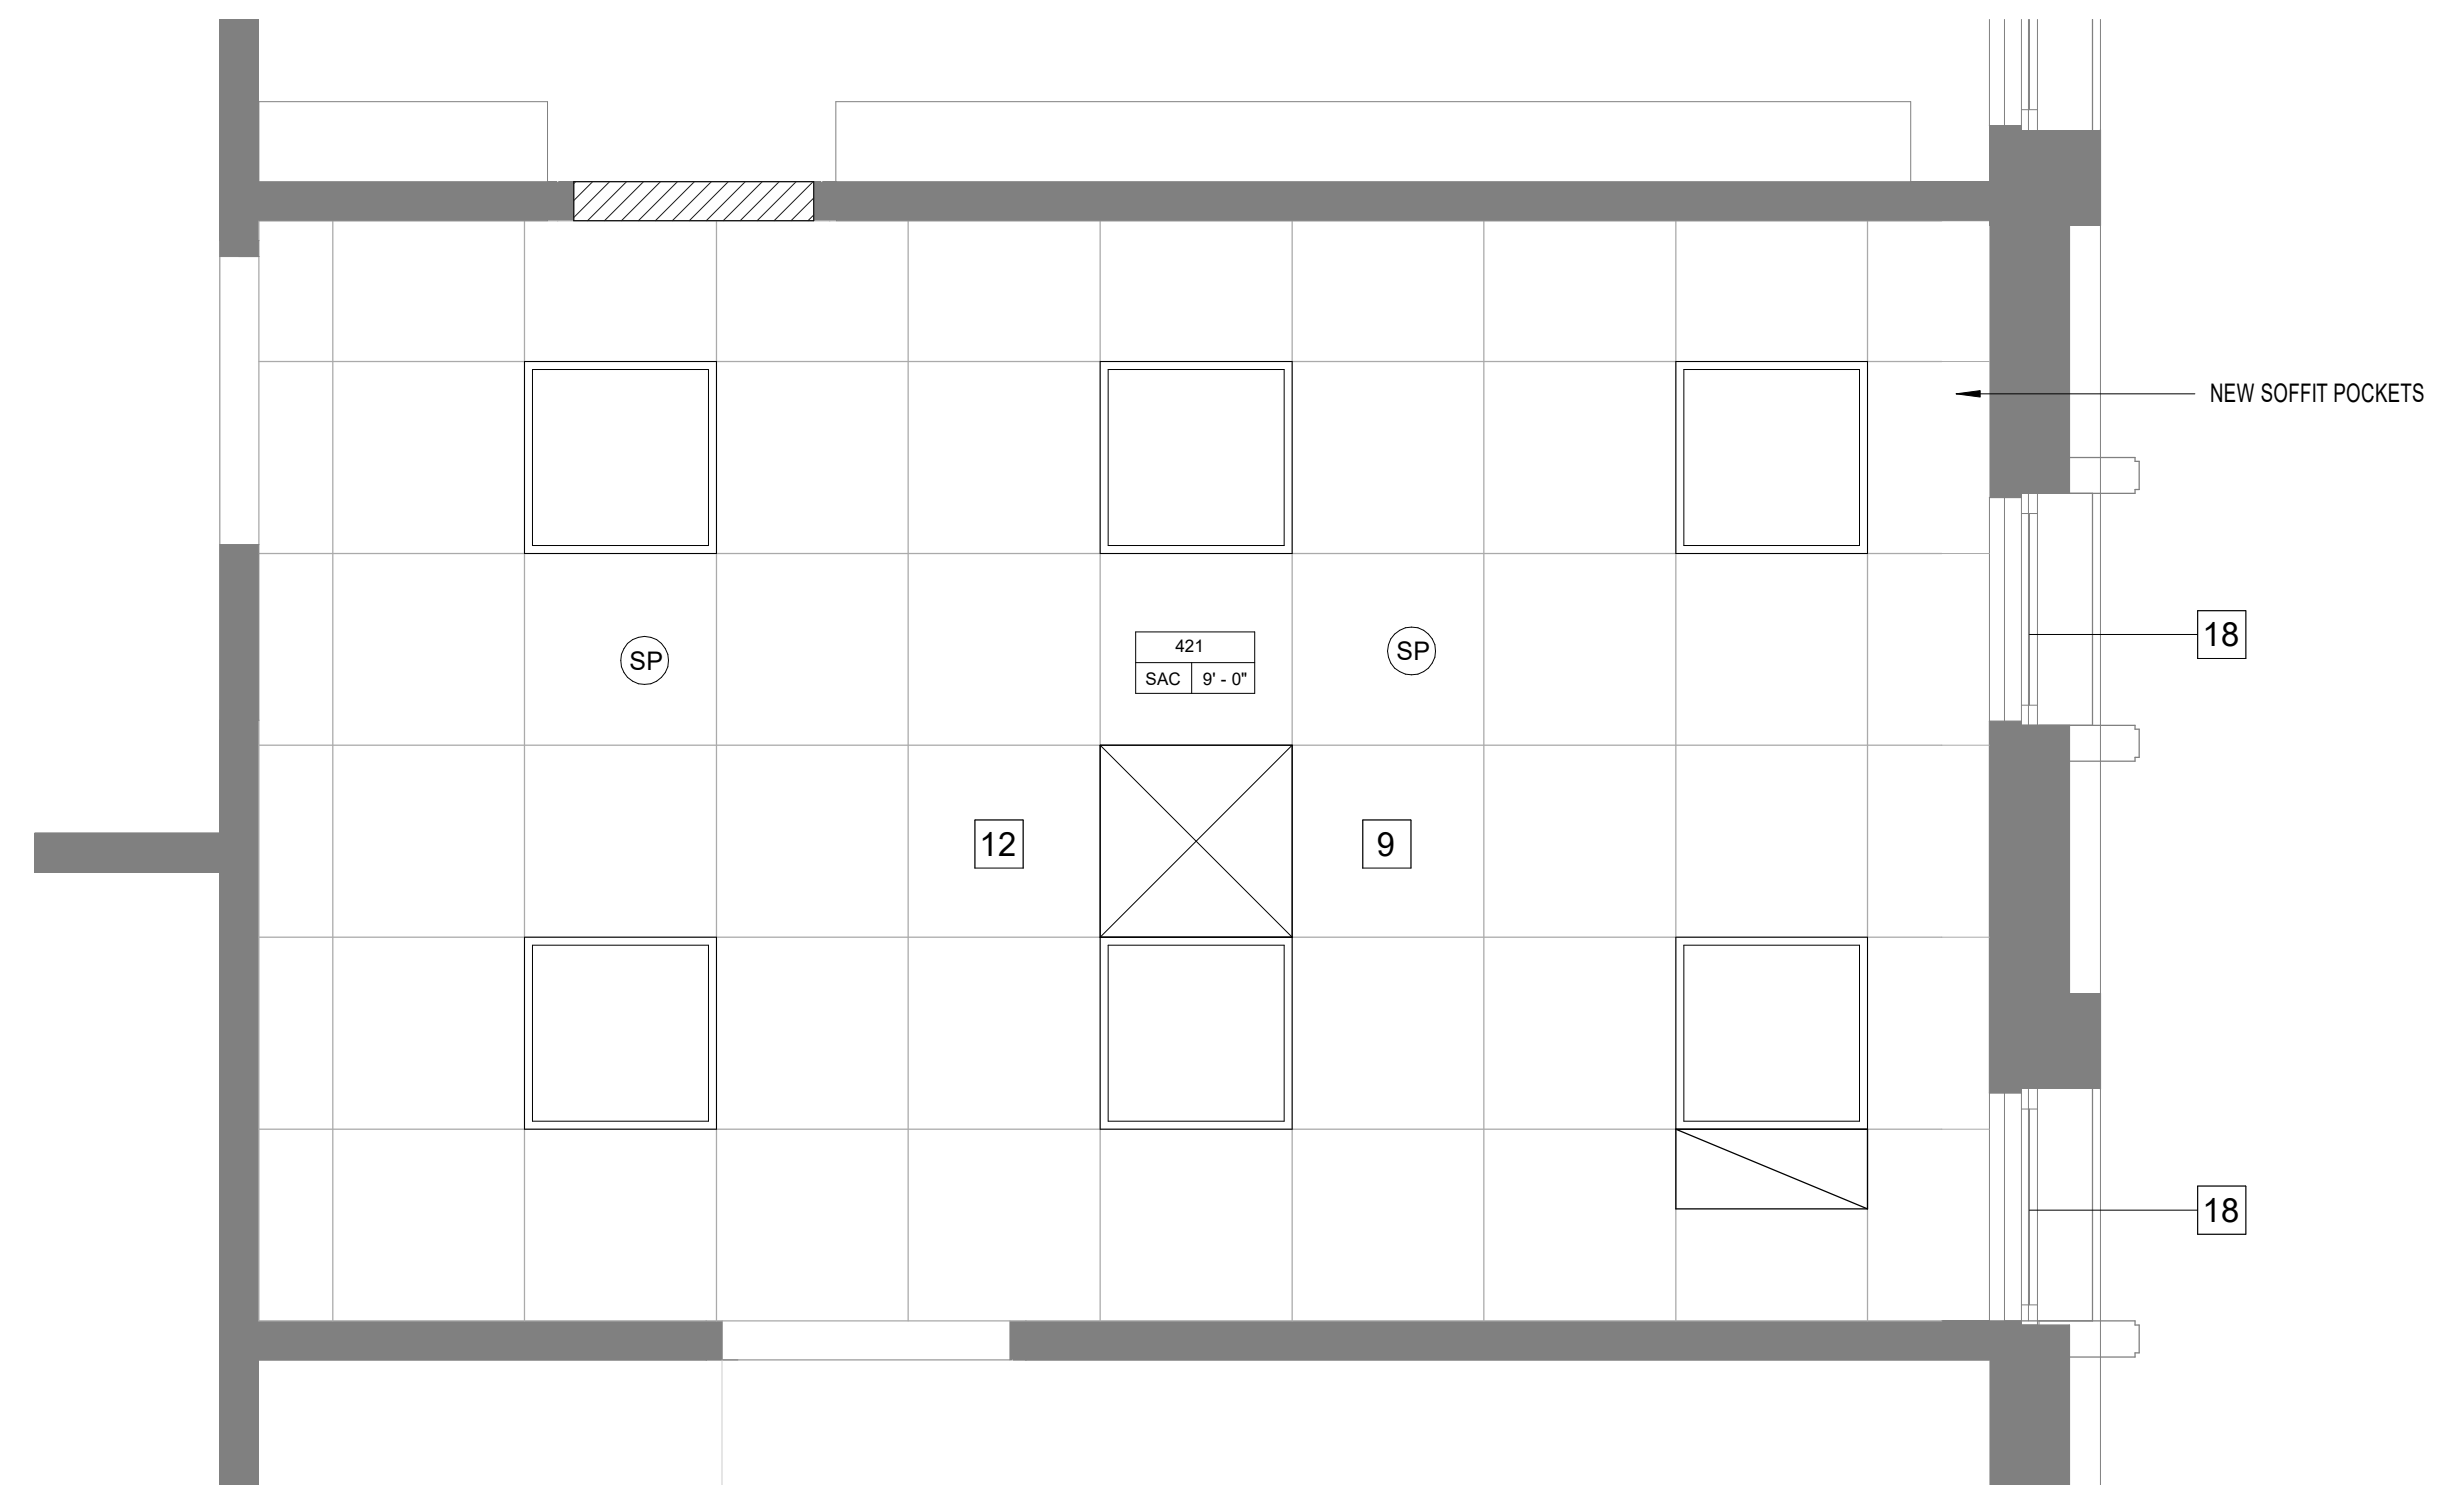

2	NEW REFLECTED CEILING PLAN LEVEL 4 - ROOM 421
A1.2	1/2" = 1'-0"

FLOOR PLAN LEGEND

Name	ROOM NAME AND NUMBER
101	
SP	SPRINKLER
SD	SMOKE DETECTOR
BL	BLUE LIGHT
H	FIVE-HORN STROBE ALARM
CR	CARD ACCESS
	2X2 TROFFER
	2X2 EMERGENCY TROFFER
	2X2 CEILING DIFFUSER
	RETURN AIR GRILLE
	INFILL DOOR OPENING

FSU BELLAMY
BUILDING


19480	Drawn By: KV - SL
Project Code	Checked By: DB

9 NOVEMBER 2023

Date

CONTRACT
DOCUMENTS

Revisions



NEW PLANS

Tallahassee Florida

A1.2

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978



FLOOR PLAN LEGEND

Name	ROOM NAME AND NUMBER
101	
SP	SPRINKLER
SD	SMOKE DETECTOR
BL	BLUE LIGHT
H	FIVE-HORN/ STROBE ALARM
CR	CARD ACCESS
	2X2 TROFFER
	2X2 EMERGENCY TROFFER
	2X2 CEILING DIFFUSER
	RETURN AIR GRILLE
	INFILL DOOR OPENING

NEW CONSTRUCTION NOTES:

SEE PLANS FOR SCOPE OF WORK

- 1
- INFILL PREVIOUS DOOR OPENING WITH PARTITION WALL CONSTRUCTION TO MATCH ADJACENT WALL. FINISH NEW CONSTRUCTION IN EACH ROOM.
- 2
- PROVIDE NEW FIRE-RATED FLUSH WOOD DOOR ASSEMBLY WITH HOLLOW METAL FRAME AND ASSOCIATED HARDWARE. SEE DOOR AND HARDWARE SCHEDULE FOR ADDITIONAL REQUIREMENTS. PAINT DOOR FRAME.
- 3
- PROVIDE NEW MODULAR CARPET FLOORING AND RESILIENT WALL BASE THROUGHOUT. INSTALL CARPET IN VERTICAL ASHLAR PATTERN, ORIENTED EAST TO WEST. SEE SPECIFICATION, FINISH AND COLOR SCHEDULE FOR ADDITIONAL REQUIREMENTS.
- 4
- PAINT ALL INTERIOR PARTITIONS AS REQUIRED. SEE SPECIFICATIONS, FINISH AND COLOR SCHEDULE. REPAIR DRYWALL AS REQUIRED.
- 5
- SEAL ALL PENETRATIONS AND JOINTS OF PARTITION WALLS INDICATED TO COMPLY WITH 1-HOUR FIRE-RATING REQUIREMENTS, TYP.
- 6
- NEW FURNISHINGS PROVIDED BY DEPARTMENT.
- 7
- PROVIDE NEW 24" DEPTH BASE CABINETRY WITH SOLID SURFACE COUNTERTOP, BACKSPLASH AND ENDSPLASHES AS INDICATED. SEE ELEVATIONS AND SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
- 8
- PROVIDE NEW UPPER CABINET TO MATCH BASE CABINETS.
- 9
- PROVIDE NEW SUSPENDED ACOUSTICAL CEILING SYSTEM AS INDICATED. SEE SPECIFICATIONS. INSTALL 3/4" SHADOW MOLDING AT WALLS.
- 10
- PROVIDE NEW 8'X4' GLASS MARKER BOARD AT LOCATION INDICATED.
- 11
- PROVIDE NEW 5/8" TYPE 'X' GYPSUM BOARD LAYER AT INTERIOR ELEVATION INDICATED. INSTALL OVER EXISTING METAL STUDS AND FULL HEIGHT WHERE 1 HOUR FIRE-RATING IS REQUIRED, TYP.
- 12
- INSTALL NEW LIGHTS AND HVAC GRILLES.
- 13
- CLEAN CARPET AND WALL BASE.
- 14
- CLEAN EXISTING LIGHT FIXTURES, HVAC GRILLES, FIRE SPRINKLER, ETC.
- 15
- PROVIDE BLOCKING FOR FUTURE TV MONITOR.
- 16
- INSTALL WALL BASE TO MATCH EXISTING .
- 17
- INSTALL NEW 2'-4"W X 10'-0"L ALUMINUM BLINDS 1" ALUMINUM BLIND SLATS WITH PULL CORDS.
- 18
- REPAIR CEILING SOFFIT AND PREP FOR NEW ALUMINUM BLINDS.
- 19
- SAND AND REFINISH DOOR TO MATCH EXISTING.
- 20
- INSTALL NEW PLUMBING ABOVE 3RD FLOOR CEILING. INSTALL NEW 5/8" GYPSUM DRYWALL AT CEILING AND PAINT TO MATCH EXISTING CEILING. REPAIR EXISTING GYPSUM WALL BOARD AT WALLS AND PAINT TO MATCH EXISTING.
- 21
- RELOCATED FIRE STROBE/HORN.
- 22
- REMOVE DRINKING FOUNTAIN AND REPLACE WITH NEW DRINK FOUNTAIN. BID AS ALTERNATE.
- 23
- INSTALL NEW CEILING PANEL 2X2 TO MATCH EXISTING.
- 24
- INSTALL NEW 5/8" TYPE X GYPSUM WALLBOARD AND 3-1/2" FIBERGLASS INSULATION.
- 25
- SAND AND REFINISH EXISTING DOOR AND INSTALL NEW CLOSURE.

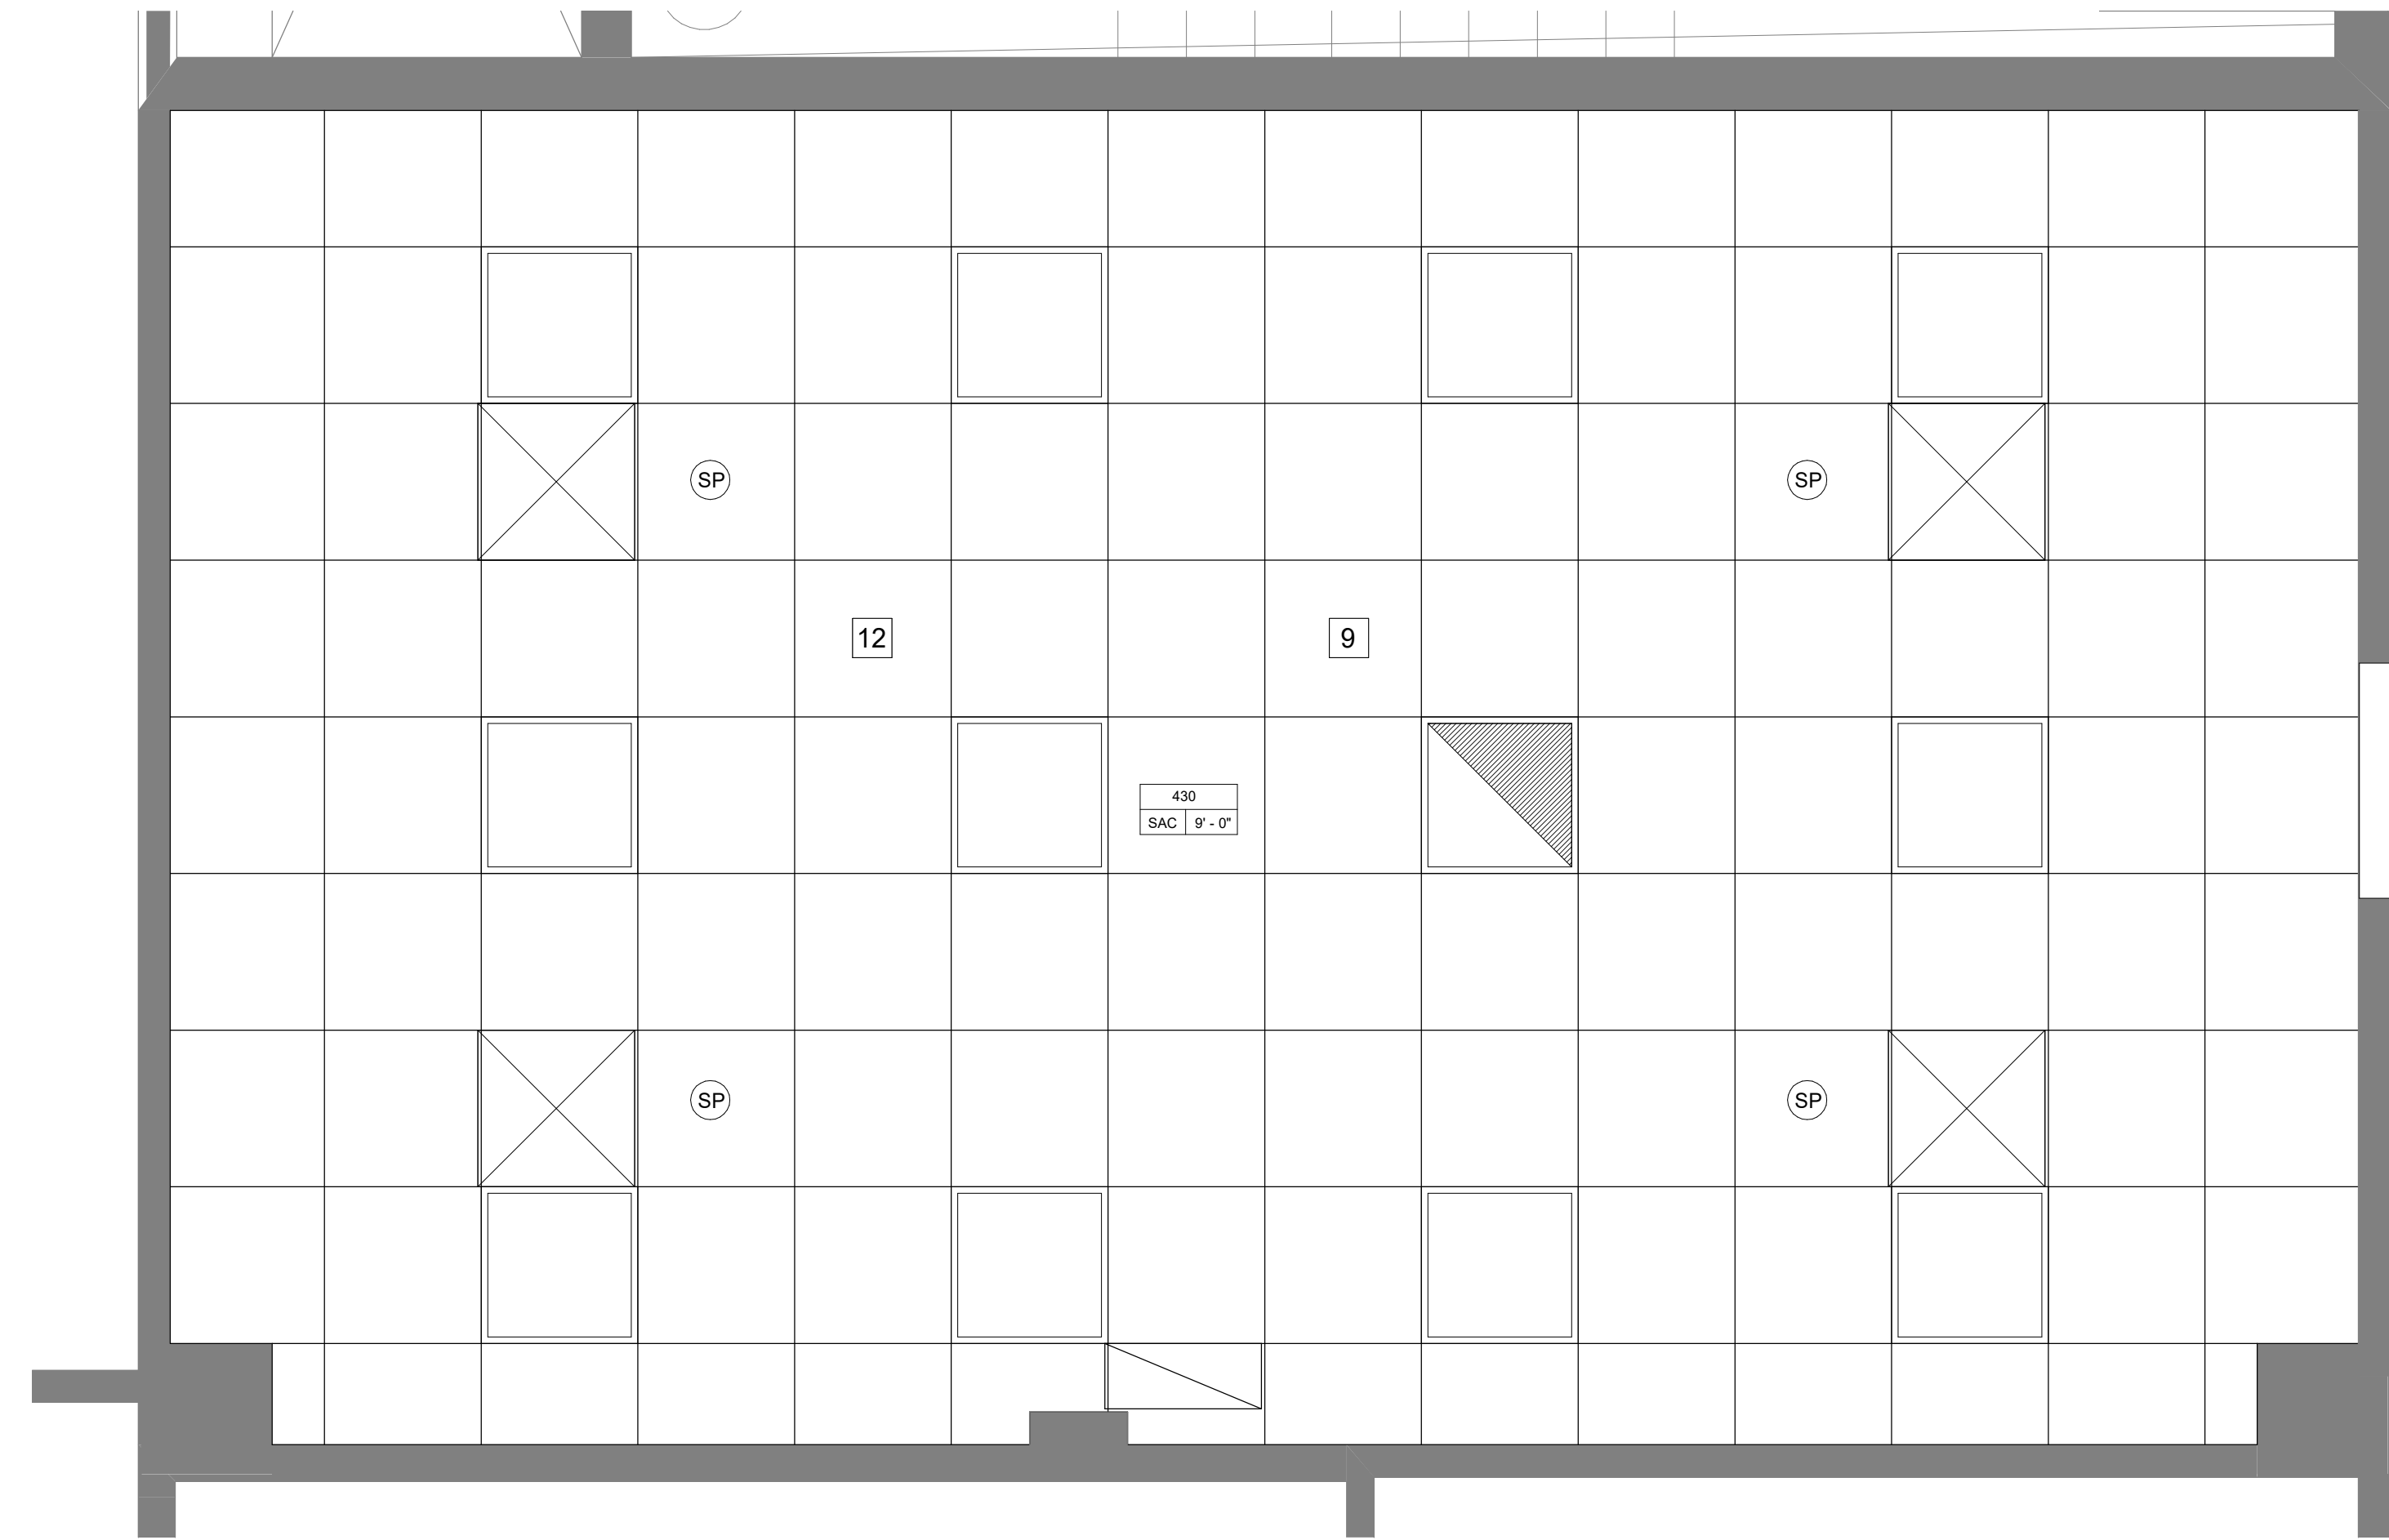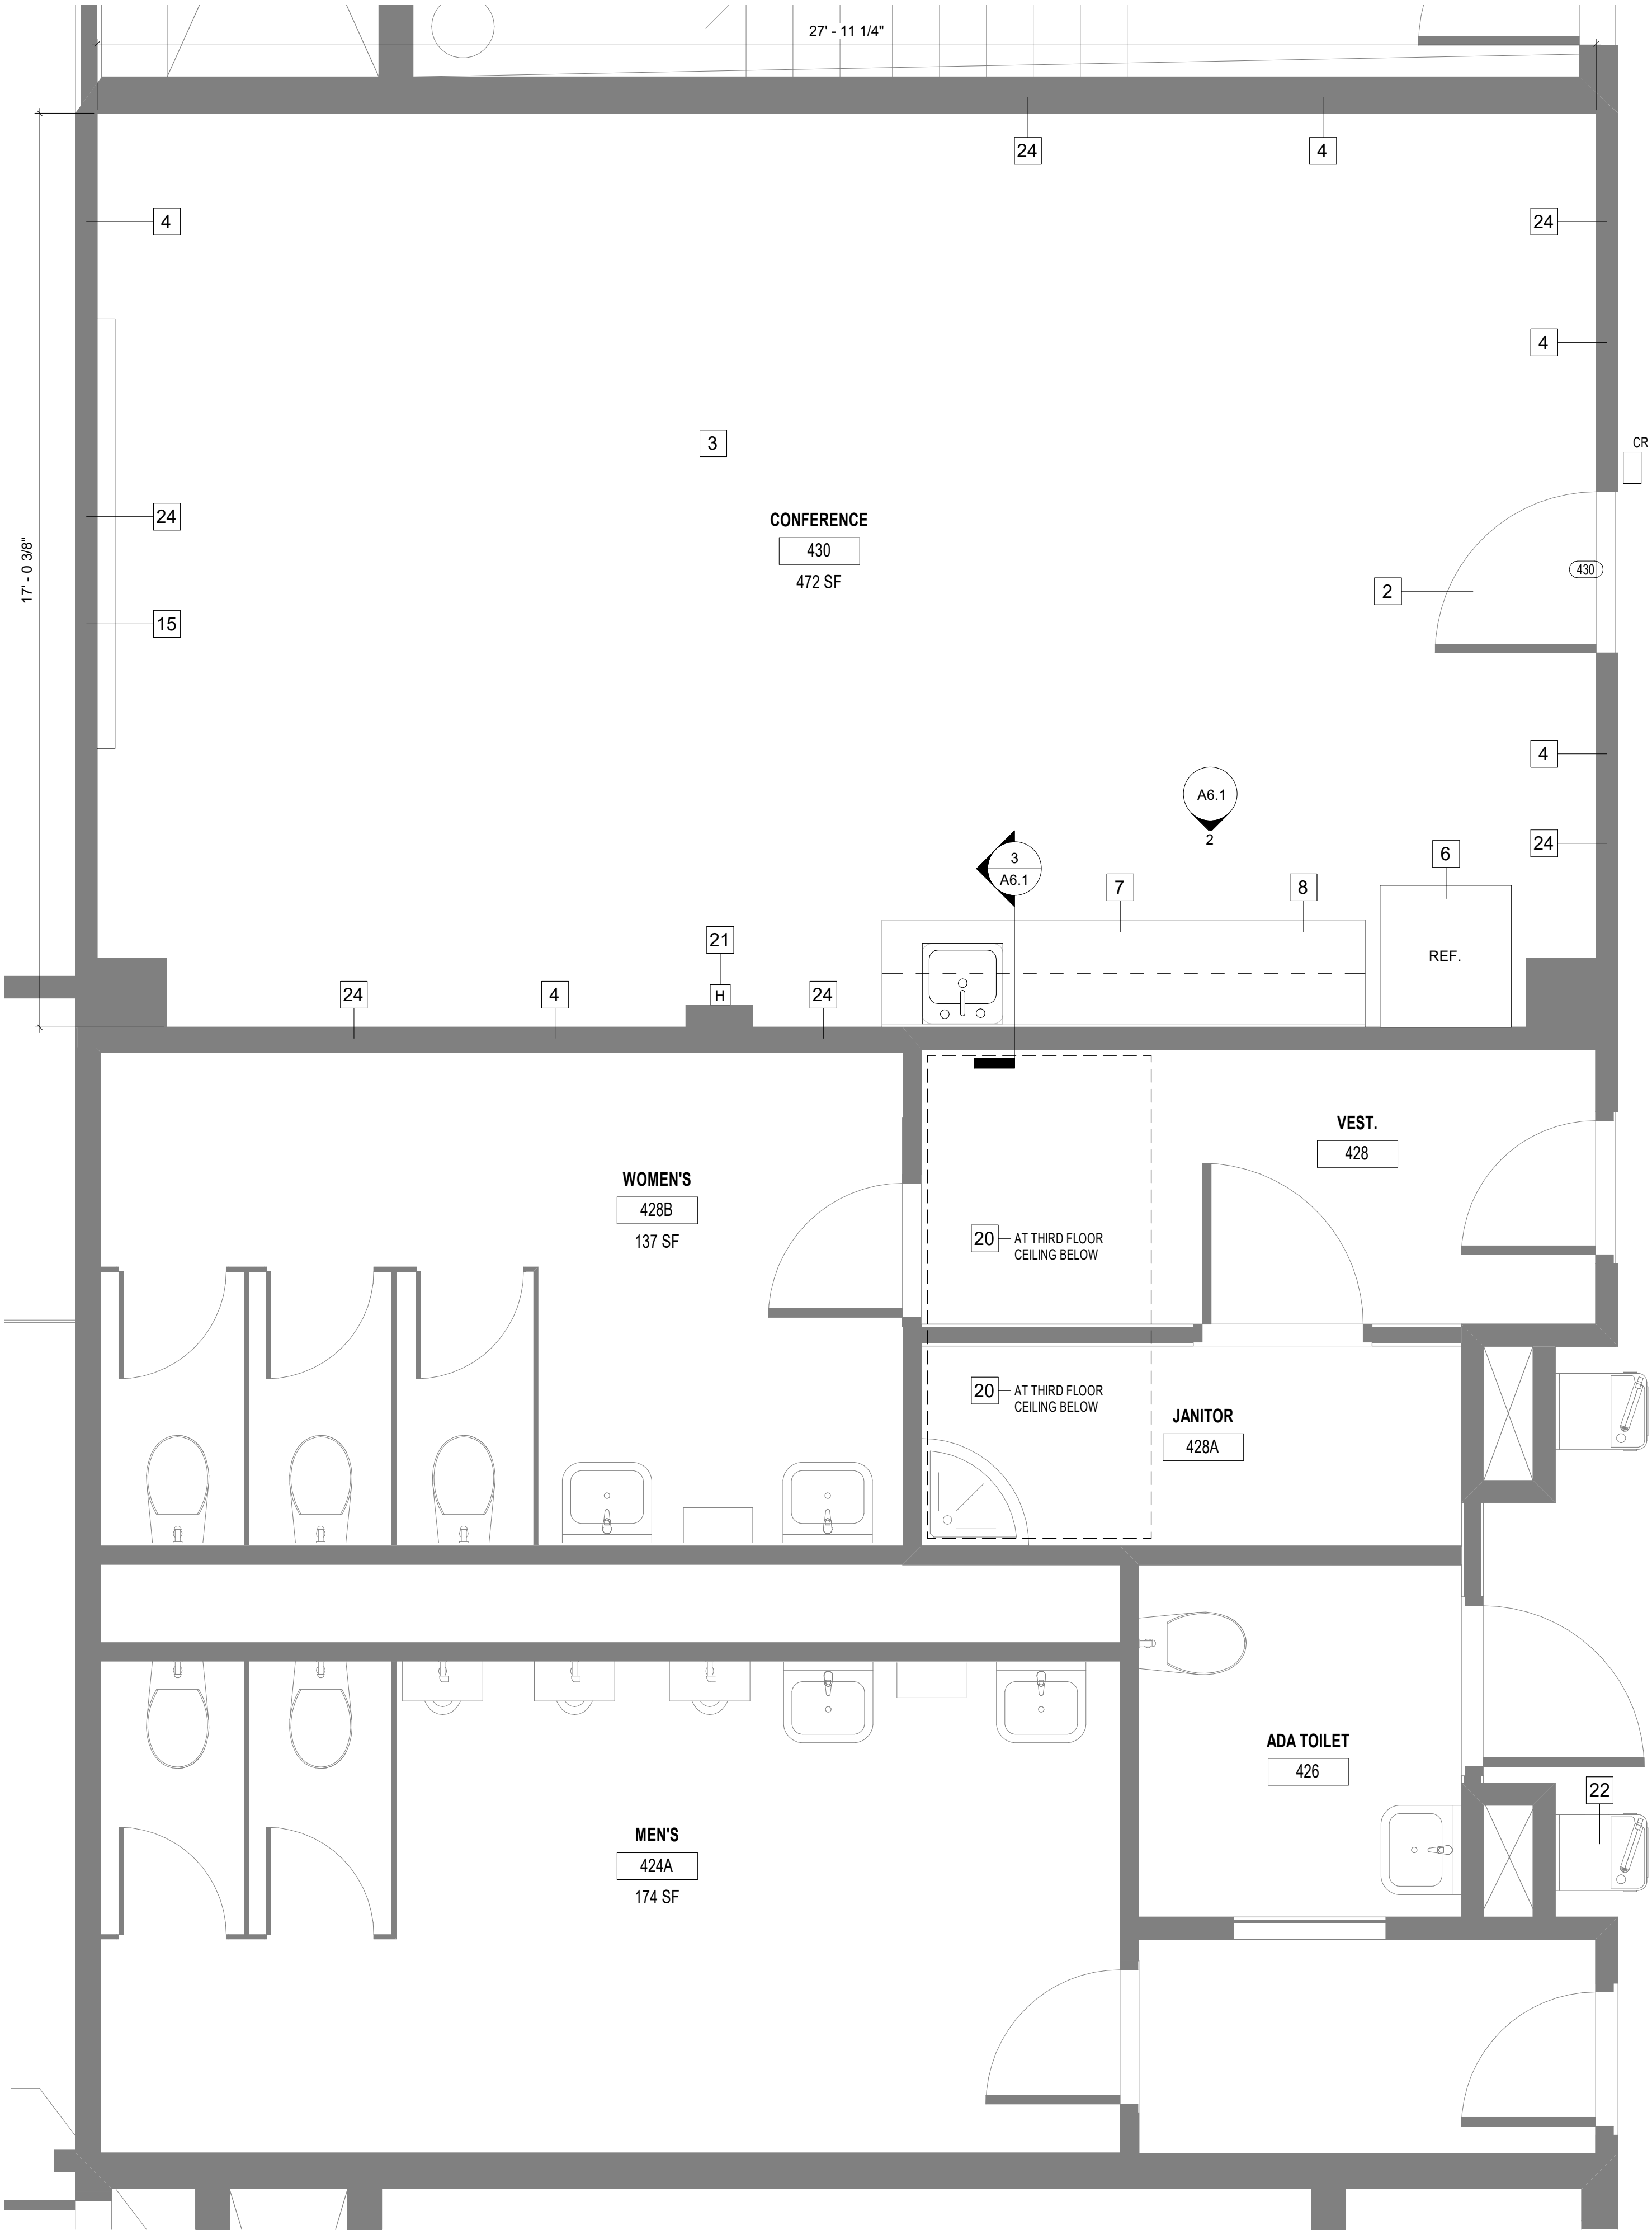

2 NEW REFLECTED CEILING PLAN LEVEL 4 - ROOM 430

A1.3 1/2" = 1'-0"

1 NEW LEVEL 4 - ROOM 430

A1.3 1/2" = 1'-0"

FSU BELLAMY BUILDING

19480 Drawn By: KV - SL
Project Code Checked By: DB

9 NOVEMBER 2023

Date

CONTRACT DOCUMENTS



Revisions

▲
▲
▲
▲
▲
▲
▲

NEW PLANS

Tallahassee Florida

A1.3

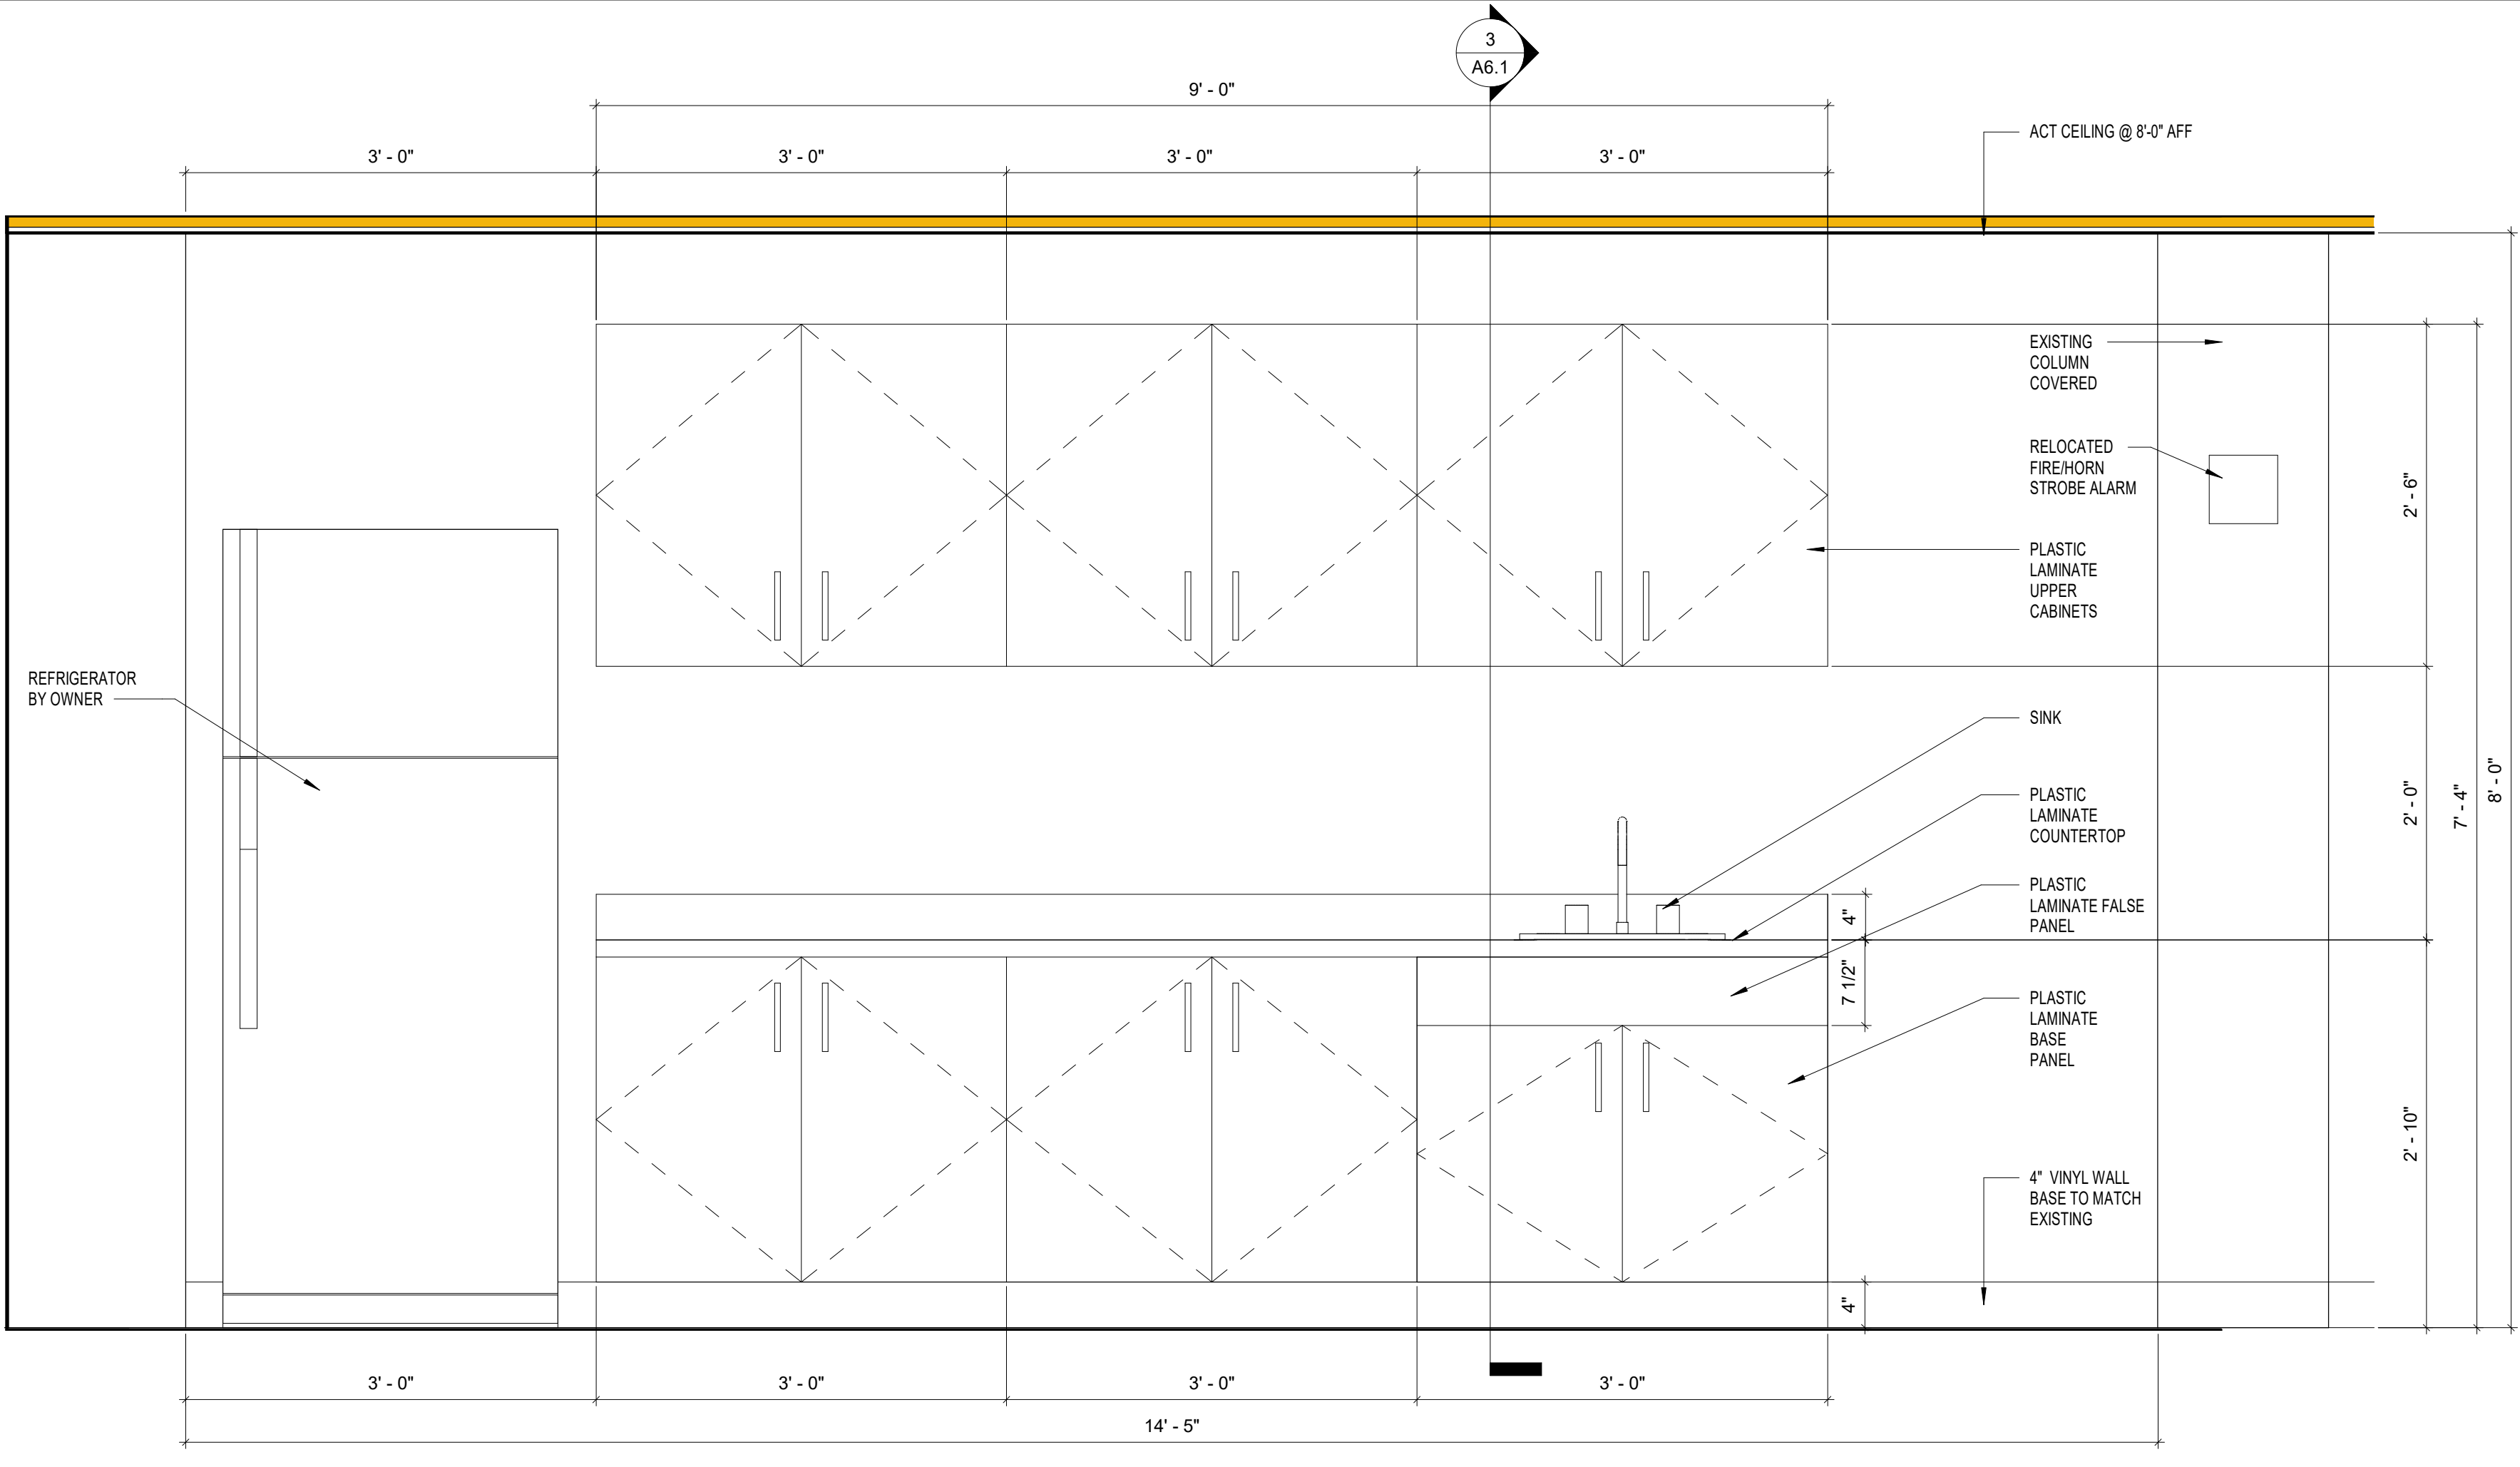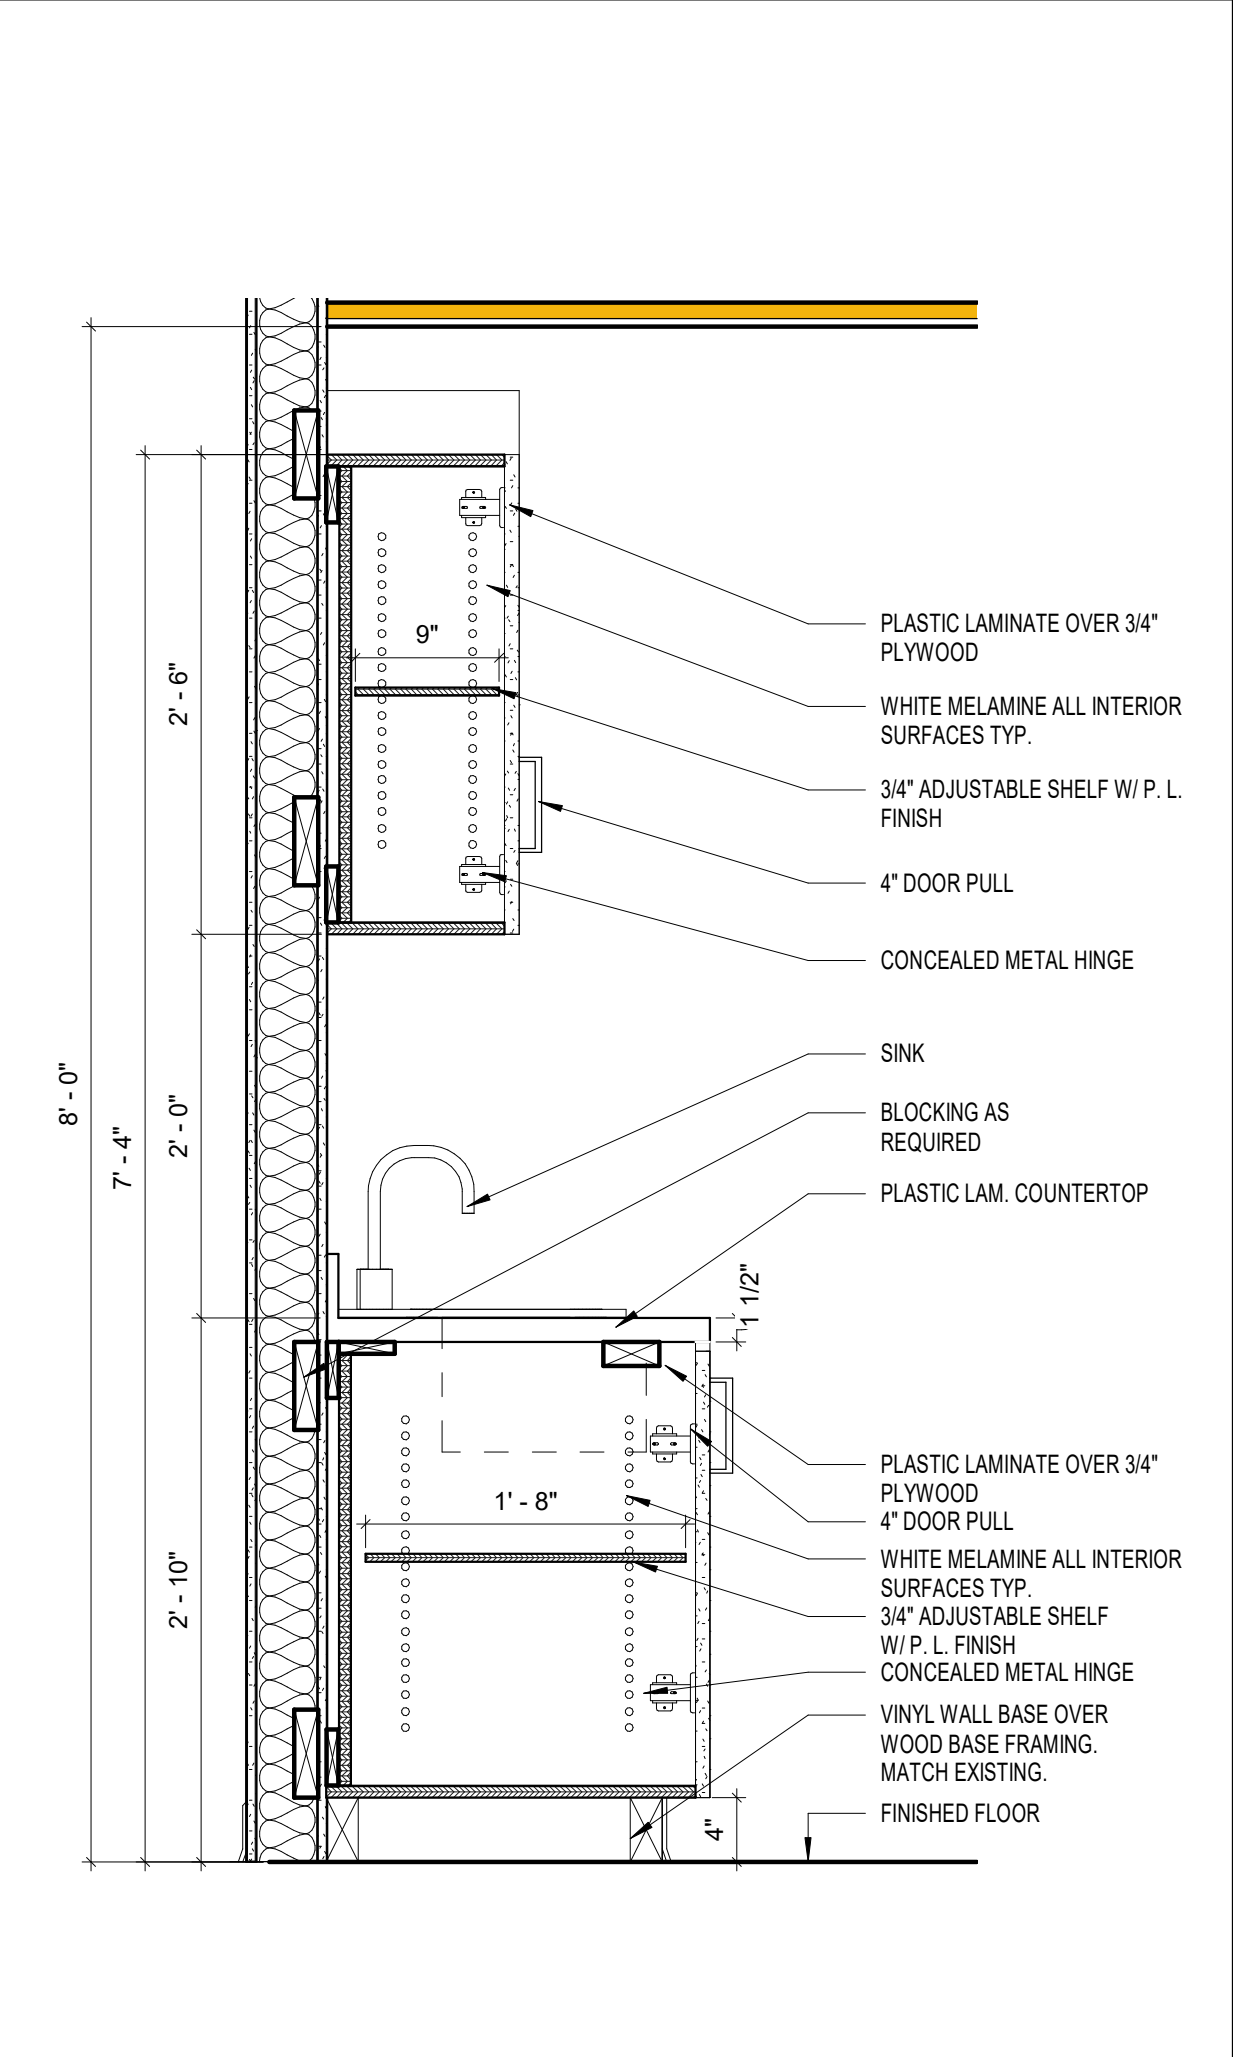


3 CONF. CASEWORK SECTION
A6.1 1" = 1'-0"

2 CONFERENCE MILLWORK ELEV.
A6.1 1" = 1'-0"

DOOR SCHEDULE												
DOOR NO.	FIRE RATING	WIDTH	HEIGHT	THICKNESS	DOOR TYPE	DOOR FINISH	FRAME TYPE	FRAME FINISH	HARDWARE SET	HEAD DETAIL	JAMB DETAIL	REMARKS
430	20 MIN.	3' - 0"	7' - 0"	0' - 1 3/4"	N	STAIN	HM1	PAINT	1	4/A6.1	4/A6.1	MATCH EXISTING STAIN FINISH

ROOM FINISH SCHEDULE												
ROOM NO.	ROOM NAME	FLOOR	BASE	WALL	NORTH	SOUTH	EAST	WEST	CEILING		AREA	COMMENTS
									MATERIAL	HEIGHT		
419	THESIS/FACULTY MEETING	CLEAN CARPET & EXIST. SLAB TO REMAIN	EXIST.	EXIST. GYP.BD.	P-2	P-1	P-2	P-2	TO REMAIN	8'-0"	333 SF	1, 4
421	ADVISING OFFICE	CR-1 & EXIST. SLAB TO REMAIN	BS-1	NEW & EXIST. GYP.BD.	P-2	P-2	P-2	P-2	SAC 1	9'-0"	210 SF	1, 2, 4, 5
430	CONFERENCE	CR-1 & EXIST. SLAB TO REMAIN	BS-1	NEW & EXIST. GYP.BD.	P-2	P-2	P-2	P-2	SAC 1	9'-0"	472 SF	1, 2, 4

FINISH MATERIAL LEGEND						
CODE	MATERIAL DESCRIPTION	MANUFACTURER	PRODUCT	COLOR/FINISH	LOCATION	MATERIAL COMMENTS
SAC ACOUSTICAL CEILING						
SAC 1	2 X 2 CEILING TILE	ARMSTRONG	1912 ULTIMA TEGULAR	WHITE	REFER TO ROOM FINISH SCHEDULE	
SAC 2	CEILING GRID	ARMSTRONG	9/16" SILHOUETTE XL - 1/4" REVEAL	WHITE	REFER TO ROOM FINISH SCHEDULE	
SAC 3	CLOUD PERIMETER TRIM	ARMSTRONG	AXIOM CLASSIC - 6"	WHITE	REFER TO ROOM FINISH SCHEDULE	
SAC 4	SHADOW MOLDING	ARMSTRONG	3/4" - 7871	WHITE	REFER TO ROOM FINISH SCHEDULE	
BS VINYL BASE MOULDING						
BS-1	4" VINYL WALL BASE	BURKE FLOORING	523	BLACKBROWN	REFER TO ROOM FINISH SCHEDULE	
CB CABINET						
CB-1	HIGH PRESSURE CABINETRY LAMINATE	NEVAMAR	S6014T	BLACK PEARL (ARP) TEXTURED FINISH	REFER TO ROOM FINISH SCHEDULE	
CR CARPET						
CR-1	MODULAR CARPET TILE	MANNINGTON - SOCIAL	15213	SYNERGY	REFER TO ROOM FINISH SCHEDULE	
CT COUNTERTOP						
CT-1	SOLID SURFACE COUNTERTOP	LG HAUSYS HI - MACS	G042	VENETIAN SAND	REFER TO ROOM FINISH SCHEDULE	
P PAINT						
P-1	ACCENT DRYWALL PAINT	SHERWIN - WILLIAMS	SW 7578	BORSCHT	REFER TO ROOM FINISH SCHEDULE	
P-2	DRYWALL PAINT	SHERWIN - WILLIAMS	SW 7036	ACCESSIBLE BEIGE	REFER TO ROOM FINISH SCHEDULE	CEILING SOFFIT PAINT
P-3	DOOR FRAME PAINT	SHERWIN - WILLIAMS	SW 7020	BLACK FOX	REFER TO ROOM FINISH SCHEDULE	
W WALL						
W-1	CRASH RAIL - WALL PROTECTION	CONSTRUCTION SPECIALTIES	SCR-48MN	MUSHROOM	REFER TO ROOM FINISH SCHEDULE	

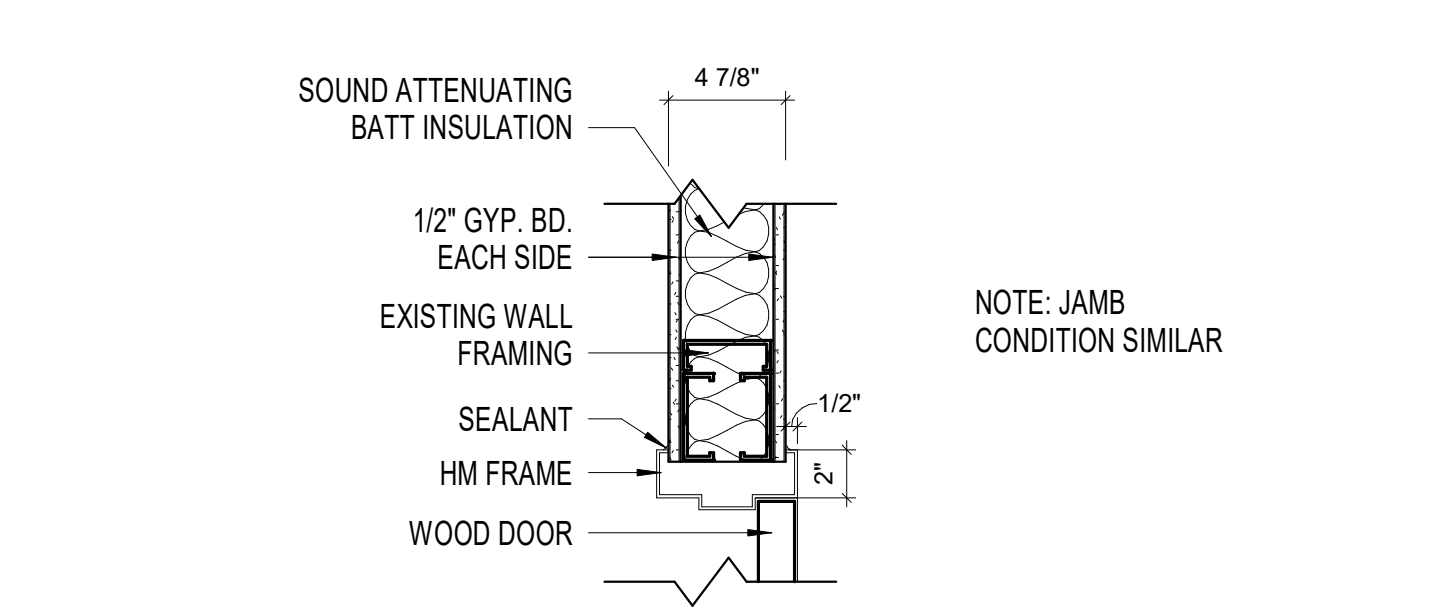

4 HEAD DETAIL
A6.1 1 1/2" = 1'-0"

DOOR TYPE

DOOR FRAME

HARDWARE SET:

SET	ITEM	QUANTITY	MANUFACTURER	FINISH
1	LOCK SETS	1 EACH	REUSE EXISTING	626
	HINGES	2 EACH	HAER BB1279, 4.5" X 4.5"	626
	CLOSER	1 EACH	CORBIN-RUSSWIN DCR210 - PARALLEL ARM	626
	SILENCERS	3 EACH	ROCKWOOD 608	GRAY
	ELECTRICAL STRIKE	1 EACH	REUSE EXISTING	-


NOTES:

- FINISHES TO MATCH ROOM 404.
- SAND AND REFINISH DOOR TO MATCH EXISTING.

EXIST. = EXISTING
GYP.BD. = GYPSUM WALLBOARD
S.A.C. = SUSPENDED ACOUSTICAL CEILING

COMMENTS:

- REPAIR GYPSUM WALLBOARD.
- PROVIDE 3/4" SHADOW MOLDING AT SUSPENDED CEILING PERIMETER.
- PAIN NEW DOOR FRAME AND STAIN DOOR TO MATCH EXISTING.
- PAIN CORRIDOR WALLS AFFECTED BY CONSTRUCTION CORNER TO CORNER, TYP.
- PAIN DOOR FRAME AND REFINISH DOOR.

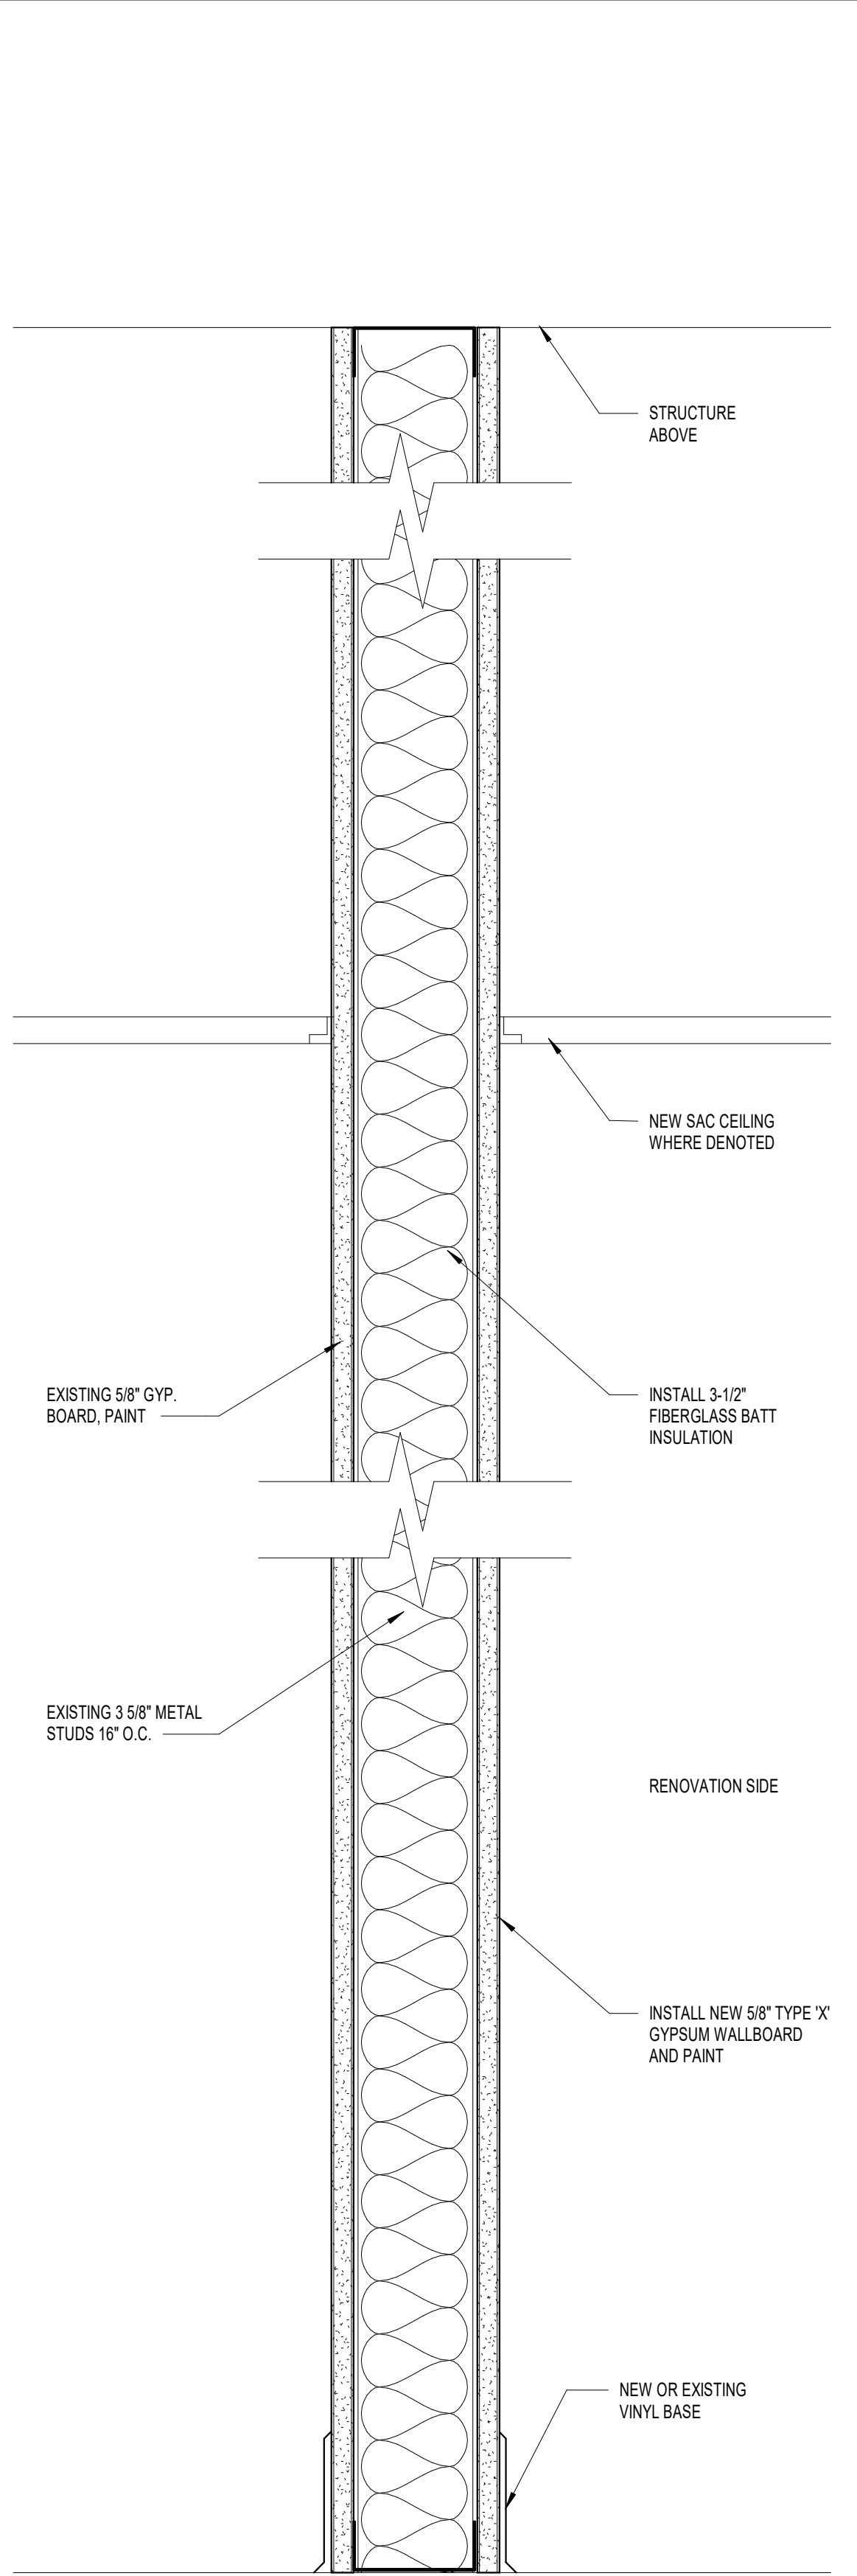

1 WALL SECTION 1
A6.1 3" = 1'-0"



FSU BELLAMY BUILDING

19480 Drawn By: KV - SL
Project Code Checked By: DB

9 NOVEMBER 2023

Date

CONTRACT DOCUMENTS

Revisions

△
△
△
△
△
△
△
△

BUILDING DETAILS

Tallahassee Florida

A6.1

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978

01 GENERAL REQUIREMENTS:

- 1) COMPLY WITH THE REQUIREMENTS OF THE "AGREEMENT BETWEEN OWNER AND CONSTRUCTION MANGER" IN EFFECT FOR CONSTRUCTION MANAGEMENT SERVICES FOR MINOR PROJECTS AT FLORIDA STATE UNIVERSITY.
- 2) SUMMARY OF WORK: RECONFIGURE EXISTING CLASSROOM AND OFFICE SPACE INCLUDING SELECTIVE DEMOLITION, NEW PARTITION WALLS, DOORS, FLOORING, WALL PROTECTION, ACOUSTICAL CEILING, CASEWORK, HVAC, FIRE PROTECTION AND ELECTRICAL.
- 3) COMPLY WITH REQUIREMENTS OF APPLICABLE PRODUCT OR TRADE STANDARDS, EXCEPT WHEN MORE RIGID REQUIREMENTS ARE SPECIFIED OR ARE REQUIRED BY APPLICABLE CODES.
- 4) SUBSTITUTIONS: ALL PRODUCTS SPECIFIED MAY BE SUBSTITUTED WITH AN APPROVED EQUAL UNLESS SPECIFIED NOTED OTHERWISE. APPROVAL MUST BE IN WRITING PRIOR TO BID SUBMITTAL. UPON REVIEW OF SUBMITTAL CONTAINING COMPLETE DOCUMENTATION.
- 5) COMPLY WITH THE REQUIREMENTS OF THE FSU DESIGN GUIDELINES AND SPECIFICATIONS. REFER TO: HTTP://WWW.FACILITIES.FSU.EDU/DEPTS/DESIGNCONSTR/GUIDELINES.PHP
- 6) THE CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS. IF CONFLICTS OR DISCREPANCIES BETWEEN BUILDING SYSTEMS ARE OBSERVABLE HE SHALL NOTIFY THE FACILITIES DESIGN & CONSTRUCTION PROJECT MANAGER IN WRITING FOR RESOLUTION PRIOR TO COMMENCING CONSTRUCTION OR INSTALLATION.
- 7) THE CONTRACTOR SHALL LIMIT THE IMPACT OF HIS WORK ON ALL SYSTEMS, EQUIPMENT AND SECURITY OF ALL AREAS WITHIN THE SCOPE OF THIS WORK. COORDINATE PROTECTION AND SECURITY OF AREAS WITH THE DEPARTMENT. THE FOLLOWING SPECIFICATIONS ARE GENERAL IN NATURE AND APPLY ONLY WHERE APPLICABLE, AS SHOWN ON THE DRAWINGS.

02 EXISTING CONDITIONS:

PROTECTIONS OR EXISTING WORK: PROVIDE NEW VISQUEEN DUST SEPARATION WALLS PROTECTING EXISTING AREAS AS NEEDED. COORDINATE LOCATION AND TYPE OF PROTECTION WITH DEPARTMENT. COORDINATE ACCESS TO THE WORK AREA AND TIME OF WORK WITH THE DEPARTMENT. MAINTAIN FUNCTIONALITY OF EXISTING BUILDING AND INFRASTRUCTURE SYSTEMS TO REMAIN UNLESS OTHERWISE NOTED. IF NEW WORK DEMOLITION TO PROPER FUNCTIONALITY.

SELECTIVE DEMOLITION: REMOVE EXISTING WALLS IN PARTIAL SEGMENTS, UNLESS OTHERWISE NOTED REMOVE INDICTED PORTIONS IN THEIR ENTIRE EXTENTS. COORDINATE DEMOLITION AND SHORING WITH FLOORCEILING FRAMING ABOVE AND BELOW. SET UP TEMPORARY SHORING AS NEEDED UNTIL COMPLETION OF NEW WALL FRAMING. REPAIR AREAS DAMAGED BY RELATED DEMOLITION AND CONSTRUCTION TO MATCH EXISTING ADJACENT CONDITIONS.

CUTTING AND PATCHING: DO NOT CUT AND PATCH STRUCTURAL ELEMENTS IN A MANNER THAT COULD CHANGE THEIR LOAD-CARRYING CAPACITY OR LOAD-DEFLECTION RATIO. DO NOT CUT AND PATCH MECHANICAL, ELECTRICAL, PLUMBING, OR LIFE SAFETY SYSTEMS (PATED WALLS ETC.) IN A MANNER THAT RESULTS IN REDUCING THEIR CAPACITY TO PERFORM AS INTENDED OR THAT RESULT IN INCREASED MAINTENANCE OR REDUCED OPERATIONAL LIFE OR SAFETY. WHERE EXISTING UTILITY SERVICES, MECHANICAL, OR ELECTRICAL SYSTEMS ARE REQUIRED TO BE REMOVED, RELOCATED, OR ABANDONED, BYPASS SUCH SERVICES/SYSTEMS BEFORE CUTTING TO MINIMIZE INTERRUPTION TO OCCUPIED AREAS. ALL INTERRUPTIONS ARE TO BE SCHEDULED IN ADVANCE WITH THE OWNER. DO NOT CUT AND PATCH IN A MANNER THAT RESULTS IN VISUAL EVIDENCE OF CUTTING AND PATCHING. REMOVE, REPLACE, PATCH AND REPAIR MATERIAL AND SURFACES BY METHODS AND WITH MATERIALS SO AS NOT TO VOID EXISTING WARRANTIES. USE MATERIALS IDENTICAL TO IN-PLACE MATERIALS. FOR EXPOSED SURFACES, USE MATERIALS THAT VISUALLY MATCH IN-PLACE ADJACENT SURFACES TO THE FULLEST EXTENT POSSIBLE. IF IDENTICAL MATERIALS ARE UNAVAILABLE, OR CANNOT BE USED, USE MATERIALS THAT WHEN INSTALLED, WILL MATCH THE VISUAL AND FUNCTIONAL PERFORMANCE OF IN-PLACE FINISHES OR PRIMERS. PROVIDE TEMPORARY SUPPORT OF WORK TO BE CUT. PROTECT IN-PLACE CONSTRUCTION DURING CUTTING AND PATCHING TO PREVENT DAMAGE. REMOVE AND REPLACE ANY ITEMS DAMAGED DURING CONSTRUCTION PROCESS. TAKE ALL PRECAUTIONS NECESSARY TO AVOID ACCIDENTALLY CUTTING EXISTING PIPE, CONDUIT, OR DUCTWORK SERVING THE BUILDING. FIELD VERIFY LOCATION OF ALL EXISTING BUILDING AND INFRASTRUCTURE SYSTEMS AND REMOVE OR RELOCATE IF TO REMAIN SO AS TO NOT INTERFERE WITH PROPOSED BUILDING SYSTEMS. REMOVE IN-PLACE FLOOR AND WALL COVERINGS AND REPLACE WITH NEW MATERIALS. IF NECESSARY, TO ACHIEVE UNIFORM COLOR AND APPEARANCE, WHERE PATCHING OCCURS IN A PAINTED SURFACE, APPLY PRIMER AND INTERMEDIATE PAINT COATS OVER THE PATCH AND APPLY FINAL PAINT COAT OVER ENTIRE UNBROKEN SURFACE CONTAINING THE PATCH. PROVIDE ADDITIONAL COATS UNTIL PATCH BLENDS WITH ADJACENT SURFACES. PATCH, REPAIR, OR REHANG IN-PLACE CEILINGS AS NECESSARY TO PROVIDE AN EVEN-PLANE SURFACE OF UNIFORM APPEARANCE. CLEAN AREAS AND SPACE WHERE CUTTING AND PATCHING ARE PERFORMED, COMPLETELY REMOVING PAINT, MORTAR, OILS, PUTTY, DUST, ETC.

06 WOOD, PLASTICS AND COMPOSITES:

FINISH CARPENTRY: INSTALL WORK IN ACCORDANCE WITH AWI CUSTOM QUALITY STANDARD PER AWI P-200 - ARCHITECTURAL WOODWORK QUALITY STANDARDS; ARCHITECTURAL WOODWORK INSTITUTE. MAXIMUM VARIATION FROM TRUE: 1/32 INCH. FILL UNACCEPTABLE GAPS IN ADJOINING NEW AND EXISTING CONSTRUCTION. PROVIDE CONTINUOUS COLOR-MATCHED SEALANT BEAD - PAINTABLE WHERE ADJACENT SURFACE IS PAINTED.

CABINETRY: FOLLOW "ARCHITECTURAL WOODWORK QUALITY STANDARDS" BY ARCHITECTURAL WOODWORK INSTITUTE (AWI). FLUSH OVERLAY, CUSTOM GRADE, UNLESS OTHERWISE NOTED. ALL HARDWARE MUST COMPLY WITH ANSIBMHA A156.9 "AMERICAN NATIONAL STANDARD FOR CABINETS HARDWARE". USE FULLY CONCEALED HINGES BY BLUM OR GRAS OR ARCHITECT APPROVED EQUAL. NICKLE PLATED ADJUSTABLE SHELF SUPPORTS BY HAFELE OR ARCHITECT APPROVED EQUAL. DRAWER & DOOR PULLS TO BE HICKORY HARDWARE P2290-SS, 6-1/8" STAINLESS STEEL WITH SATIN FINISH, OR ARCHITECT APPROVED EQUAL. PROVIDE KEYED LOCKS AT EACH DOOR PANEL BY KNAPE & VOGT, OR ARCHITECT APPROVED EQUAL. ALL VISIBLE SURFACES TO RECEIVE PLASTIC LAMINATE FINISH UNLESS OTHERWISE NOTED. FIELD VERIFY AND PROVIDE SHOP DRAWINGS FOR ARCHITECT'S REVIEW AND APPROVAL.

07 THERMAL AND MOISTURE PROTECTION:

ACOUSTIC FIBERGLASS BATT INSULATION: FIBERS MANUFACTURED FROM GLASS OR SLAG COMPLYING WITH ASTM C665 AND PASSING ASTM E84 TEST. MAX. FLAME SPREAD OF 25. MAX SMOKE DEVELOPMENT OF 50. R22 (U.O.N.) AT ALL EXTERIOR WALL & 2X6 (6" METAL) STUD CONSTRUCTION. R11 (U.O.N) IN 2X4 (OR 3-5/8" METAL) STUD CONSTRUCTION. R30 (U.O.N.) AT ALL CEILING/HORIZONTAL APPLICATIONS. INSULATION TO FIT TIGHTLY BETWEEN FRAMING TO ALLOW FOR FRICTION FIT INSTALLATION. PROVIDE TEMPORARY SUPPORT AS REQUIRED BY MFR WHERE ONE SIDE OF WALL CAVITY IS OPEN OR PARTITION IF GREATER THAN 8' HIGH. BASIS OF DESIGN: OWENS CORNING. ECOTOUCH UNFACED SOUND ATTENUATION BATS.

FIRESTOP: ALL PENETRATIONS AT CORRIDOR WALLS, VERTICAL OPENINGS, OR ANY FIRE-RATED ASSEMBLY SHALL BE SEALED WITH A FIRE STOP SYSTEM MEETING CODE REQUIREMENTS FOR EACH LOCATION. TYPICAL 1 HR DRYWALL PARTITIONS PENETRATIONS SHALL BE METAL PIPE PENETRATION WITH INSULATION, 4" PIPE, UL SYSTEM NO. 147, CONFIGURATION C.

08 OPENINGS:

FIRE-RATED DOOR ASSEMBLIES: UNITS SHALL COMPLY WITH NFPA 80, WITH FIRE RESISTANCE CHARACTERISTICS DETERMINED PER ASTM E-152 AND LABELED AND LISTED BY UL. FACTORY MUTUAL. WARNOCK HERSEY, OR OTHER TESTING AGENCY.

STEEL FRAMES: COMPLYING WITH STEEL DOOR INSTITUTE "RECOMMENDED SPECIFICATIONS FOR STANDARD STEEL DOOR AND FRAME "ANSI/SDD-100. FRAMES SHALL BE MIN. 16 GA. WITH MITERED, WELDED CORNERS; KNOCK-DOWN UNITS ARE ALLOWED ONLY IN EXISTING WALLS. PROVIDE PRODUCTS BY STEELCRAFT, CECO, CURRIES OR ARCHITECT APPROVED EQUAL.

FLUSH WOOD DOORS, RATED: COMPLY WITH THE "ARCHITECTURAL WOODWORK QUALITY STANDARDS." PROVIDE 1-3/4" THICK DOOR WITH 5-PLY STRUCTURAL COMPOSITE LUMBER CORE, 20 MIN FIRE-RATED, WDMA EXTRA HEAVY DUTY, SOL-C5, SLIP-MATCH PLAIN SLICED - BIRCH VENEER-WDMA GRADE A. GLAZING IN INTERIOR LIGHTS TO BE CLEAR, HIGH PERFORMANCE, TEMPERED IN DOORS AND SIDE LIGHTS AS REQUIRED BY CODE. COORDINATE HINGE LOCATION AND BACKSETS WITH FRAME MANUFACTURER. PROVIDE PRODUCTS BY MASONITE ARCHITECTURAL: MOHAWK-ARCHITECTURAL SERIES.

GLAZING, INTERIOR, FIRE-RATED: PROVIDE SINGLE GLAZING AT INTERIOR OPENINGS CONSISTING OF CLEAR GLASS UNLESS OTHERWISE NOTED. GLAZING TO COMPLY WITH RATING REQUIREMENT FOR WALL ASSEMBLY RATING, WHERE ADJACENT TO EXIT ACCESS CORRIDORS PROVIDE GLAZING WITH TEMPERATURE RISE RATING, PROVIDE SAFETY OR TEMPERED GLAZING WHERE REQUIRED BY CODE AND/OR INDICATED ON THE DRAWINGS. PROVIDE UNITS FROM SINGLE SOURCE MANUFACTURER BASIS OF DESIGN. TECHNICAL GLASS PRODUCTS - FIRELITE PLUS, 45 MIN RATING, 5/16" THICKNESS, STANDARD SURFACE, CLEAR FINISH.

FINISH HARDWARE: PROVIDE FULL-MORTISE TYPE HINGES, BALL-BEARING FUNCTION, SWAGED, INNER LEAF BEVELED, SQUARE CORNERS, WITH TAMPER-PROOF PINS. PROVIDE BEST CYLINDERS AND BEST CORES. CORES SHALL BE INSTALLED BY THE FSU KEY SHOP. FOR A PROJECT REQUIRING UP TO 12 CORES, THE CORES SHALL BY PROVIDED AND INSTALLED BY THE FSU KEY SHOP WITH MINIMUM 2 WEEKS NOTIFICATION PRIOR TO SUBSTANTIAL COMPLETION. FOR A PROJECT REQUIRING MORE THAN 12 CORES, THE CORES SHALL BE PROVIDED/PURCHASED BY THE CONTRACTOR FOR RECEIPT AND INSTALLATION BY THE FSU KEY SHOP - COORDINATE WITH KEYSHOP UPON RECEIPT OF NOTICES TO PROCEED FOR CONSTRUCTION. PROVIDE ALL LEVER HANDLES. EXIT DEVICES SHALL BE VON DUPRIN RIM TYPE. PROVIDE HARDWARE FINISH TO MATCH EXISTING. PROVIDE PRODUCT SUBMITTAL FOR ARCHITECT'S REVIEW AND APPROVAL.

09 FINISHES:

CARPET: CARPET SHALL BE VINYL BACKED, DIRECT GLUE DOWN MODULAR. ALL CARPET SHALL WITHSTAND A MINIMUM CRITICAL RADIANT FLUX OF 0.22 WATTS PER SQUARE CENTIMETER TESTED PER NFPA 253. COMPLY WITH FSU DESIGN GUIDELINES. THE CARPET CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSTALLATION OF RESILIENT BASE IF REQUIRED BY THE PROJECT SCOPE. PROVIDE VINYL REDUCERS OR TRANSITIONS WHERE NEEDED TO ABUT DISSIMILAR OR UNEVEN FLOOR FINISHES; MATCH COLOR OF RUBBER BASE IF PROVIDED OR AS DIRECTED BY THE TESTS. PROVIDE PRODUCTS TO MITIGATE EXCESSIVE MOISTURE CONDITIONS IF REQUIRED. SUBMIT SAMPLE(S) FOR APPROVAL. PROVIDE TO THE DEPARTMENT 5% OF INSTALLED AREA FOR USEABLE OVERSTOCK OR EACH CARPET TYPE.

RESILIENT BASE: BURKE RUBBER COVER BASE, 1/8" THICK MINIMUM, TYPE TS, COMPLYING WITH ASTM PERFORMANCE TEST ASTM F1981. PRECUT 4 FT SECTIONS ARE NOT ACCEPTABLE IN RENOVATION PROJECTS. THE WORK SCOPE SHALL INCLUDE REPAIR OF DAMAGE TO THE EXISTING WALLS CAUSE BY REMOVAL OF EXISTING WALL BASE AS REQUIRED TO MATCH ADJACENT CONDITIONS. PROVIDE TO THE DEPARTMENT 2% OF INSTALLED LINEAR FOOTAGE FOR USEABLE OVERSTOCK OF EACH BASE TYPE.

GYPSUM BOARD: REFER TO STRUCTURAL NOTES AND TO DRAWINGS FOR WOOD AND METAL FRAMING REQUIREMENTS. PROVIDE GYPSUM BOARD IN MAXIMUM LENGTHS AND WIDTHS AVAILABLE THAT WILL MINIMIZE JOINTS IN EACH AREA. PROVIDE THICKNESSES AS INDICATED ON DRAWINGS. ALL GYPSUM WALLBOARD TO COMPLY WITH ASTM C 1396. USE RATED GYPSUM BOARD WITH UL LABEL WHERE INDICATED IN DRAWINGS AND WHERE REQUIRED BY CODE. UL LABEL SHOULD REMAIN VISIBLE ABOVE FINISHED CEILINGS. UNLESS OTHERWISE INDICATED, USE MOISTURE RESISTANT GYPSUM BOARD THAT COMPLIES WITH ASTM C630 WHERE INDICATED ON DRAWINGS, IN RESTROOMS AND SHOWER STALLS, AND BEHIND WALL TILE. INSTALL GYPSUM BOARD AS RECOMMENDED BY MANUFACTURER. PROVIDE ALL MATERIALS NECESSARY FOR A COMPLETE INSTALLATION. TRIMS TO COMPLY WITH ASTM C 1047. EXTERIOR TRIMS TO BE HOT-DIPPED GALVANIZED STEEL OR ROLLED ZINC ALUMINUM TRIMS TO COMPLY WITH ASTM B 221. ALLOY 6063-T5. PROVIDE FACTORY FABRICATED REVEALS AT ALL INSIDE & OUTSIDE CORNERS AND INTERSECTING HORIZONTAL/VERTICAL REVEAL CONDITIONS. TAPE AND FILL WITH APPROPRIATE COMPOUND ALL JOINTS PER ASTM C 475. UNLESS OTHERWISE NOTED, USE STEEL DRILL SCREWS PER ASTM C 1002. USE SCREWS COMPLYING WITH ASTM C 954 FOR FASTENING PANELS TO STEEL MEMBERS THAT ARE BETWEEN 0.033 AND 0.112 INCHES THICK. PROVIDE LEVEL 4 FINISH.

ACOUSTICAL CEILING PANELS: PROVIDE CEILINGS WITH A CLASS A RATING. 24" X 24" UNLESS OTHERWISE NOTED. CAST OR MOLDED MATERIAL BASED ACOUSTICAL PANELS, FINE TEXTURED, 3/16" EXPOSED TEE METAL SUSPENSION SYSTEM COMPLYING WITH ASTM C 635 REQUIREMENTS. PROVIDE GALVANIZED OR ALUMINUM SUSPENSION SYSTEMS IN WET AREAS. PROVIDE CONTINUOUS GRID AND MOLDING LENGTH ALONG FLUSH WITH MAIN GRID SYSTEM. PROVIDE TO THE DEPARTMENT 5% OF INSTALLED AREA FOR USEABLE OVERSTOCK OF EACH PANEL TYPE.

PAINTING: TEST ALL EXISTING SURFACES. PREP WALL PRIOR TO PAINTING: REMOVE ANY EXISTING MINOR DEFECTS SUCH AS EXCESS DRYWALL MUD, FILL-IN WALL DINGS. PROVIDE PRIMING AND ANY OTHER SURFACE PREPARATIONS RECOMMENDED BY THE PAINT MANUFACTURER FOR THE FINISH SPECIFIED. AT EXISTING DOOR FRAMES TO BE REPAINTED: REMOVE EXISTING DOOR SILENCERS AND REPLACE WITH NEW AFTER REPAINTING. PROVIDE NUMBER OF COATS AS REQUIRED FOR UNIFORM APPEARANCE ALONG A WALL, CEILING OR OTHER SURFACE. AT PROJECT COMPLETION TURN OVER ALL REMAINING PAINT TO DEPARTMENT - LABEL EACH CAN WITH ROOM NUMBERS WHERE USED. PROVIDE SUBMITTAL LISTING ALL PAINT SYSTEMS WITH REQUIRED SURFACE MILLAGES AND RELATED PRODUCTS FOR REVIEW AND APPROVAL.

PAINT SYSTEMS: SHERWIN-WILLIAMS. ALTERNATE MANUFACTURER COMPUTER COLOR MATCHES NOT ALLOWED FOR SPECIFIED COLOR SELECTIONS.

GYPSUM DRYWALL:
PRIMER COAT (IF REQUIRED): S-W PROMAR 200 ZERO VOC LATEX PRIMER, B28W/2600, AT MIN. 1.0 MILS D.F.T.
2 FINISH COATS: S-W PROMAR 200 ZERO VOC LATEX EG-SHEL, B20-2600, AT MIN. 1.7 MILS D.F.T.

FLUSH WOOD DOORS, INDICATED (STAINED):
SURFACE PREP: SCRUFF SAND, CLEAN AND PREPARE SUBSTRATE PER MANUFACTURER'S RECOMMENDATIONS
STAIN COAT: WOOD CLASSICS INTERIOR OIL STAIN, A49 SERIES
2 FINISH COATS: S-W WOOD CLASSICS WATERBORNE POLYURETHANE VARNISH, A68 SERIES, AT MIN. 400 TO 500 SQ FT/GAL

HOLLOW METAL FRAMES, INTERIOR:
PRIMER COAT (IF REQUIRED): S-W PRO INDUSTRIAL PRO-CRYL UNIVERSAL PRIMER, B66-310, AT MIN. 2.0 MILS D.F.T.
2 FINISH COATS: S-W PRO INDUSTRIAL SEMI-GLOSS ACRYLIC, B66-650, AT MIN. 2.5 MILS D.F.T.

SEALANTS: PROVIDE SEALANTS WHEREVER REQUIRED TO PROVIDE WEATHER-TIGHT SEAL AGAINST EXTERIOR INFILTRATION AND TO FILL GAPS IN CONSTRUCTION JOINERY FOR CONSISTENT FINISH APPEARANCE PRIOR TO PAINTING. SEE ALSO FINISH CARPENTRY SPEC SECTION REQUIREMENTS. PROVIDE SEALANTS COMPATIBLE WITH SUBSTRATES AND EXTENDED FOR PERFORMANCE. INTERIOR APPLICATION: SILICONIZED ACRYLIC LATEX COMPLYING WITH ASTM C834, PECORA AC-20. EXTERIOR APPLICATION: LOW MODULUS SILICONE: DOW CORNING 790; POLYURETHANE: SHERWIN WILLIAMS LOXON 1K SMOOTH WHERE APPLICATION IS TO BE PAINTED.



FSU BELLAMY BUILDING

19480 Drawn By: Author
Project Code Checked By:Checker

9 NOVEMBER 2023
Date

CONTRACT DOCUMENTS

Revisions

- △
- △
- △
- △
- △
- △
- △

NOTES

Tallahassee Florida

A6.2

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32

FLEX DUCT INSULATION AND JACKETING

INSULATE DIFFUSER WITH DUCT WRAP AS SPECIFIED FOR SUPPLY AND RETURN AIR DUCTWORK. DIFFUSERS MAY BE FACTORY INSULATED, HOWEVER, INSULATION SHALL MEET MECHANICAL SPECIFICATIONS

DIFFUSER OF SIZE AND TYPE SHOWN ON PLAN VIEWS

BUILDING CEILING CONSTRUCTION, TYPICAL

PROVIDE LAY-IN OR SURFACE TYPE MOUNTING BORDERS. COORDINATE WITH ARCHITECTURAL CEILING PLANS. LAY-IN SHOWN.

FLEX DUCT OF SIZE INDICATED ON PLAN VIEWS

NYLON FLEXIBLE DUCT BAND, SECURE WITH A MINIMUM OF (2) SCREWS AND (2) COATS OF MASTIC OVER BAND, FLEX, AND SCREWS.

TAPE AND PROVIDE (2) COATS OF INSULATION MASTIC AT JOINING OF FLEX DUCT INSULATION AND DIFFUSER INSUL.

TOP BEAM CLAMP (U.L. LISTED OR F.M. APPROVED)

ALL THREAD ROD

PIPE HANGER RING (U.L. LISTED OR F.M. APPROVED)

TYPICAL ALL-THREAD CONTINUOUS, ONE PIECE HANGER ROD. COUPLING OF RODS IS NOT PERMITTED.

TYPICAL STRUT MOUNTED PIPE STRAP

TYPICAL PIPING INSULATION. DO NOT CRUSH

TYPICAL GALVANIZED SHEET METAL SADDLE. REFER TO SPECIFICATIONS

TYPICAL 12 GAUGE CHANNEL STRUT WITH SLOTS

TYPICAL DOUBLE NUT WITH SINGLE WASHER. TYPICAL BOTH SIDES OF STRUT

LENGTH AS REQUIRED BY NUMBER AND SIZES OF PIPES

NOTE:

1. REFER TO SPECIFICATIONS AND FLOOR PLANS FOR MATERIALS AND SIZES.

2. SPECIFIED HANGER ROD, STRUT, NUTS, WASHERS AND PIPE STRAPS SHALL BE OF GALVANIZED PLATED MATERIALS.

3LAY IN DIFFUSER DETAILSCALE: NONE

2HANGER-STEEL DETAILSCALE: NONE

1TRAPEZE HANGER DETAILSCALE: NONE

1940 Buford Blvd. - Tallahassee, FL 32302
Phone: 850-402-3040
Fax: 850-402-9659
Certificate of Authorization #: 29709
Tomahawk Project #: 23056

RICHARD LINDBURG
PE#: 62829
MICHAEL BOYLE
PE#: 76983

THIS ITEM HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY THE ENGINEER INDICATED HEREIN WITH THE DATE AS INDICATED IN THE TIME STAMP USING AN SHA CODE.
PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SHA AUTHENTICATION CODE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

FSU BELLAMY BUILDING

19480 Drawn By: TKE
Project Code Checked By: WHT

Date 03 NOVEMBER, 2023

100% CONTRACT DOCUMENTS

Revisions

LEVEL 4 OVERALL PLAN & DETAILS - MECHANICAL AND PLUMBING

Tallahassee Florida


MP1.0

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978

1 LEVEL 4 OVERALL PLAN - MECHANICAL & PLUMBING


MP1.0 3/32" = 1'-0"

Copyright Barnett Fronczak Barlowe & Shuler, Architects. All rights Reserved

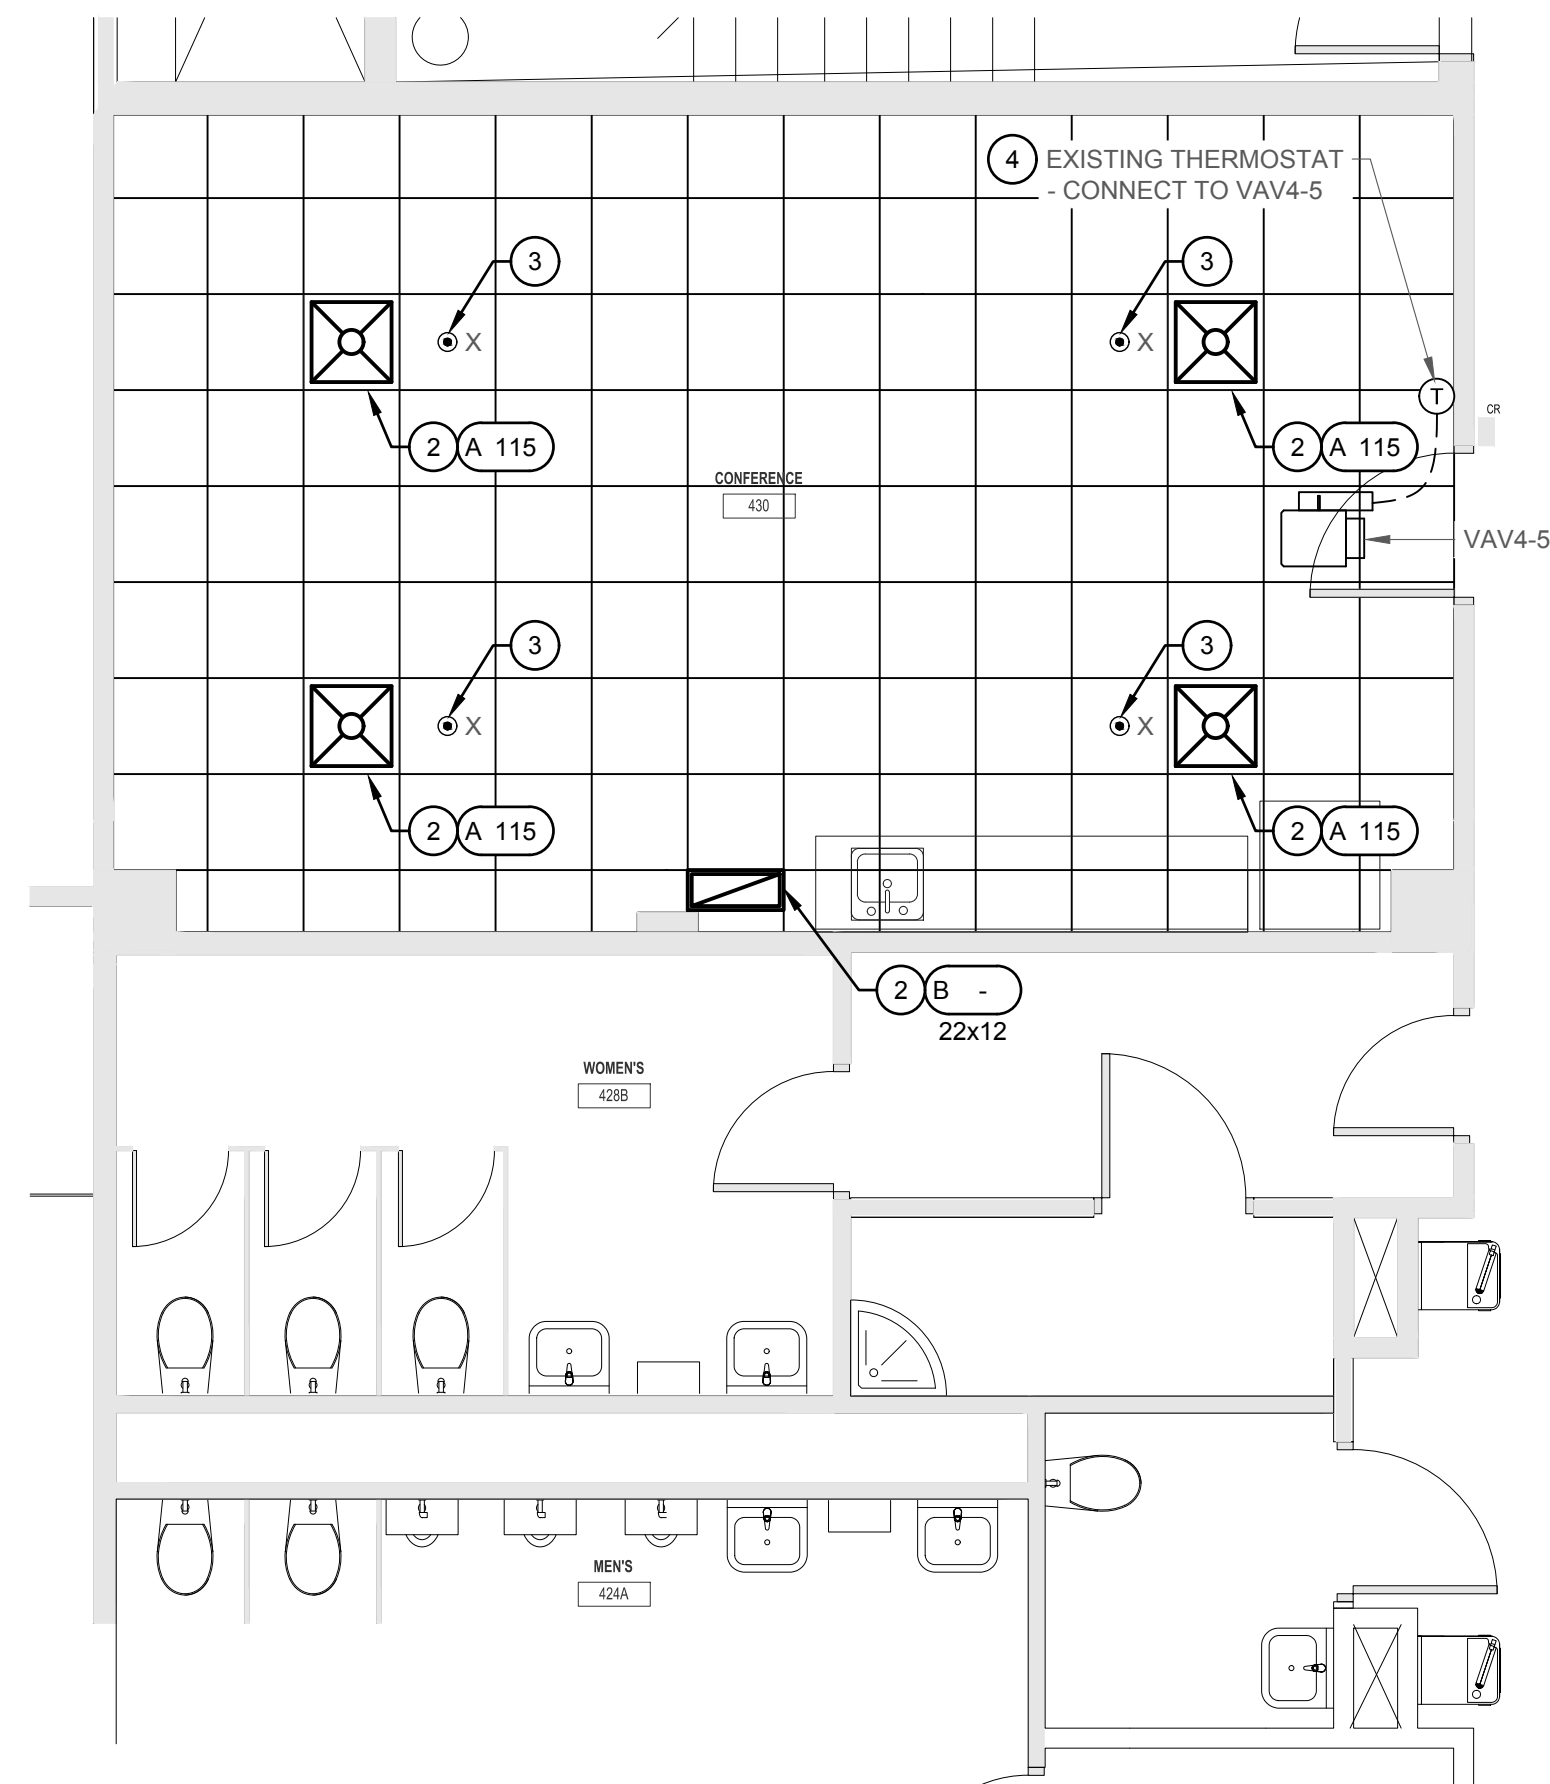


- | SHEET RENOVATION KEY NOTES: | |
|-----------------------------|---|
| 1 | EXISTING DIFFUSER/RETURN GRILLE TO REMAIN. CLEAN DIFFUSER/GRILLE AND BALANCE TO CFM INDICATED. |
| 2 | REMOVE DIFFUSER/RETURN GRILLE AND DEMOLISH DUCTWORK BACK TO ASSOCIATED TAPOFF. AFTER CEILING WORK HAS BEEN COMPLETED PROVIDE AND INSTALL NEW DIFFUSER/GRILLE IN SAME LOCATION AND EXTEND FLEXIBLE DUCTWORK FROM TAPOFF. BALANCE TO CFM INDICATED. |
| 3 | REMOVE SPRINKLER ESCUTCHEON TO ALLOW FOR CEILING TILE REMOVAL/REPLACEMENT. RE-INSTALL ESCUTCHEON AFTER CEILING TILE HAVE BEEN INSTALLED. REPLACED ANY DAMAGED ESCUTCHEONS WITH NEW MATCHING EXISTING. |
| 4 | REMOVE, CLEAN AND STORE THE EXISTING THERMOSTAT DURING CONSTRUCTION. ONCE WORK IS COMPLETED, REINSTALL THERMOSTAT IN SAME LOCATION. |
| 5 | REBALANCE THE EXISTING VAV4-6 TO 250 CFM MAX FLOW AND 75 CFM MINIMUM FLOW. CONTRACTOR TO UPDATE THE FRONT END CONTROLS TO REFLECT CHANGES. |
| 6 | REMOVE EXISTING ELECTRIC WATER COOLER AND REPLACE WITH NEW ELECTRIC WATER COOLER IN APPROXIMATE SAME LOCATION WITH MOUNTING HEIGHT AS SCHEDULED. |

- | | |
|--|--|
| ALTERNATE BID #1 SHEET RENOVATION KEY NOTES: | |
| 1A | UNDER ALTERNATE BID #1, REMOVE EXISTING ELECTRIC WATER COOLER AND REPLACE WITH NEW ELECTRIC WATER COOLER IN APPROXIMATE SAME LOCATION WITH MOUNTING HEIGHT AS SCHEDULED. |
| | |

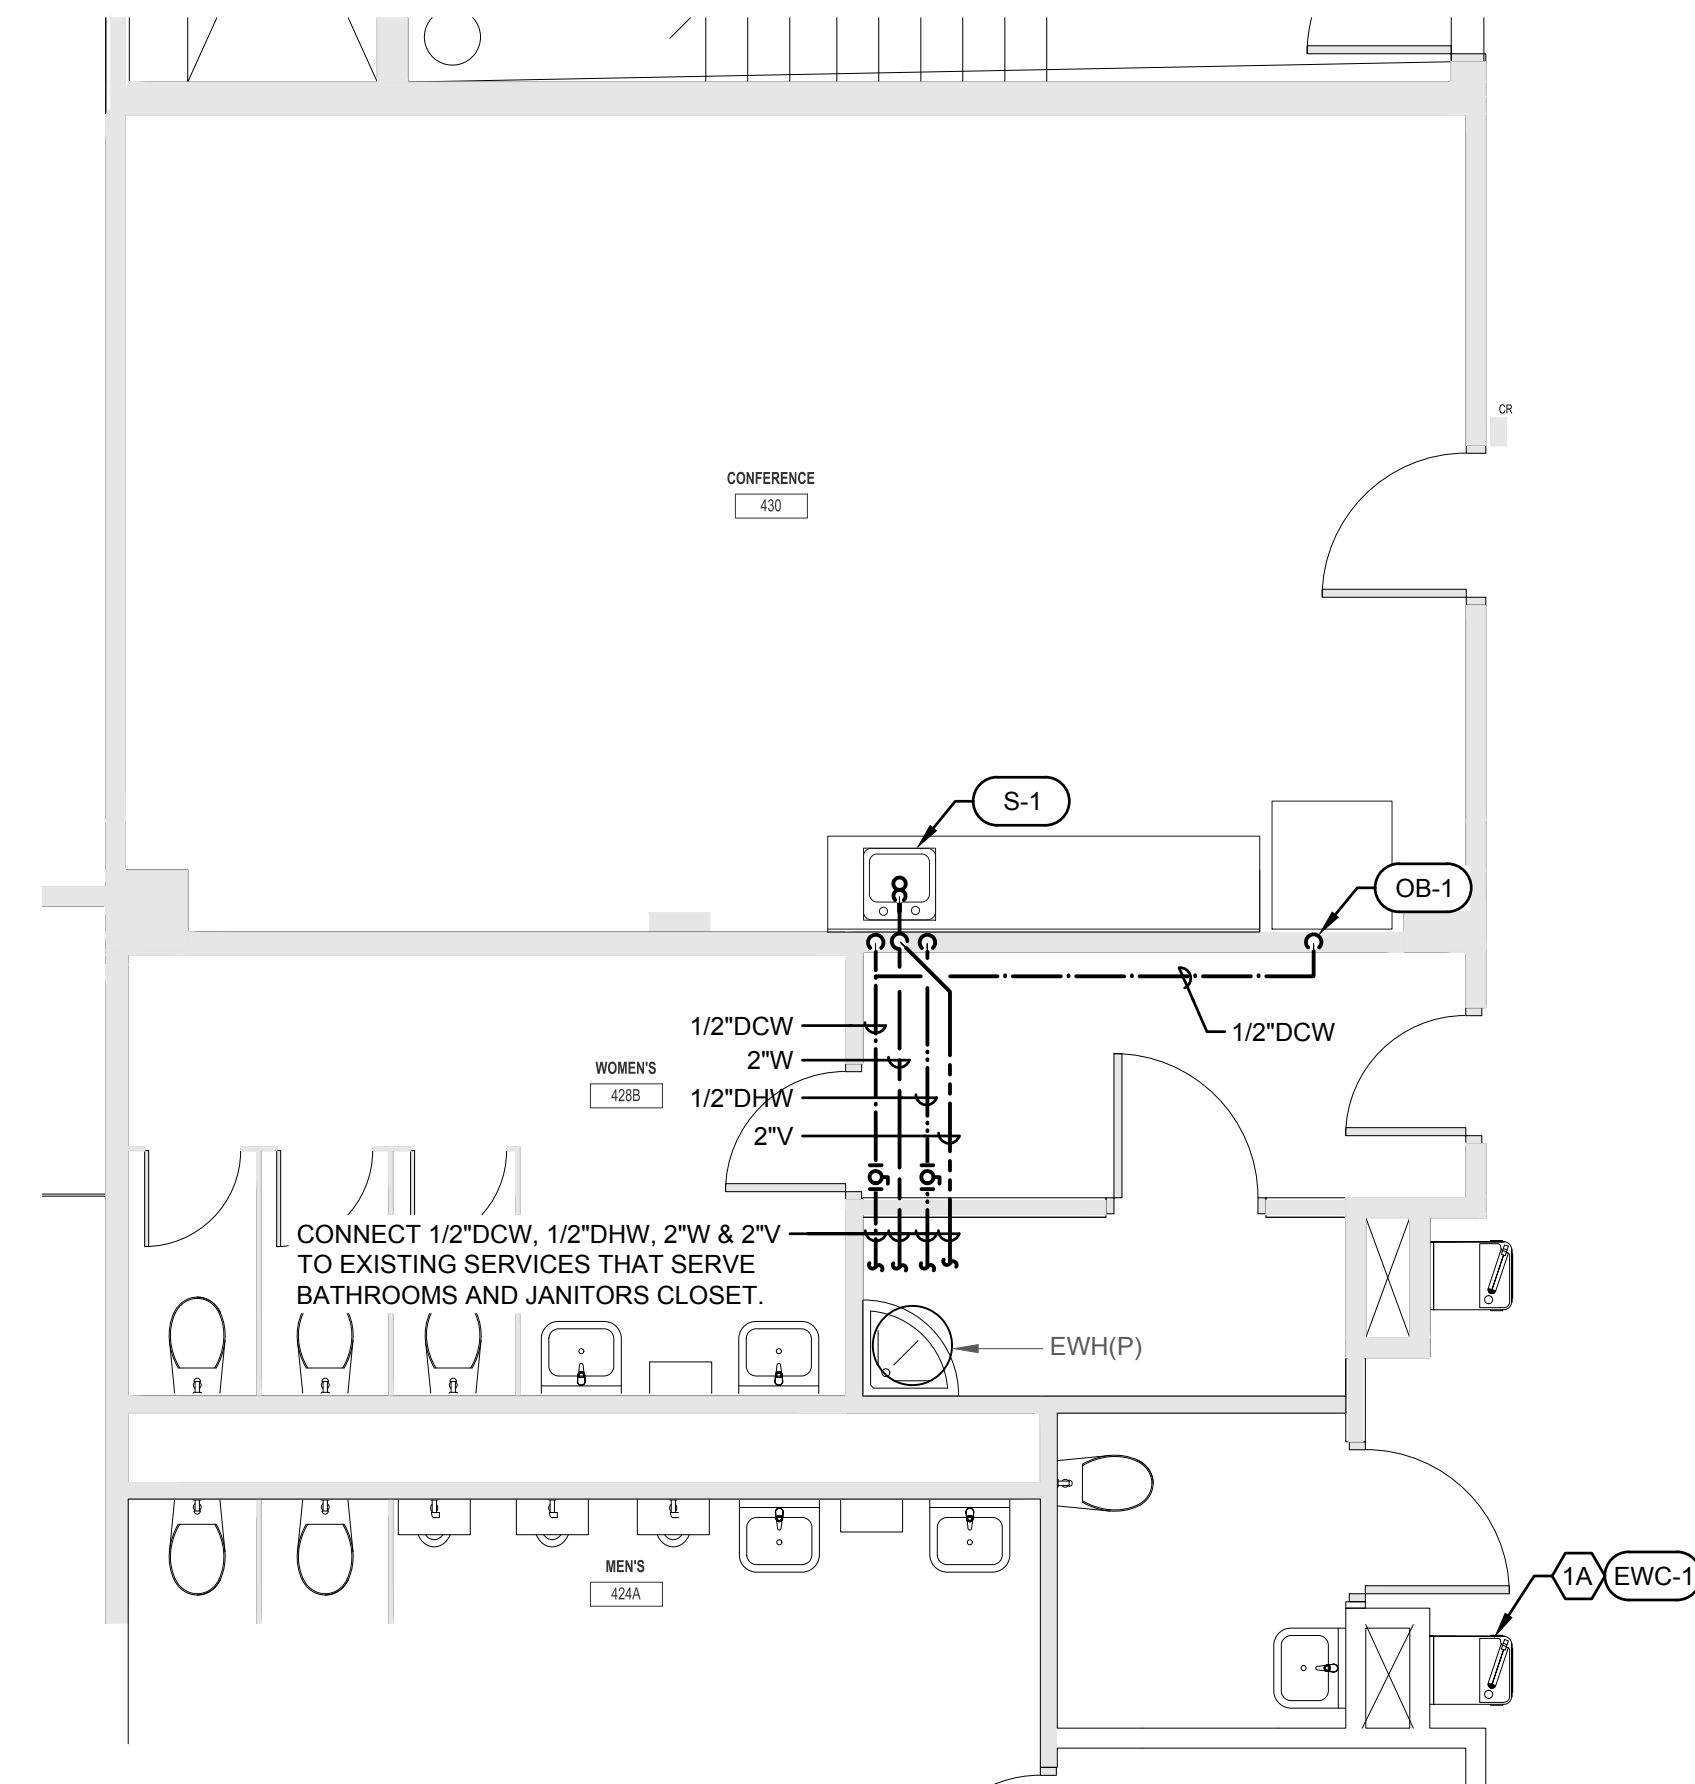



3 LEVEL 4 ROOM 430 - RENOVATION PLAN - MECHANICAL

MP1.1	$1/4" = 1'-0"$
-------	----------------





4 LEVEL 4 ROOM 430 - RENOVATION PLAN - PLUMBING

MP1.1	$1/4" = 1'-0"$
-------	----------------

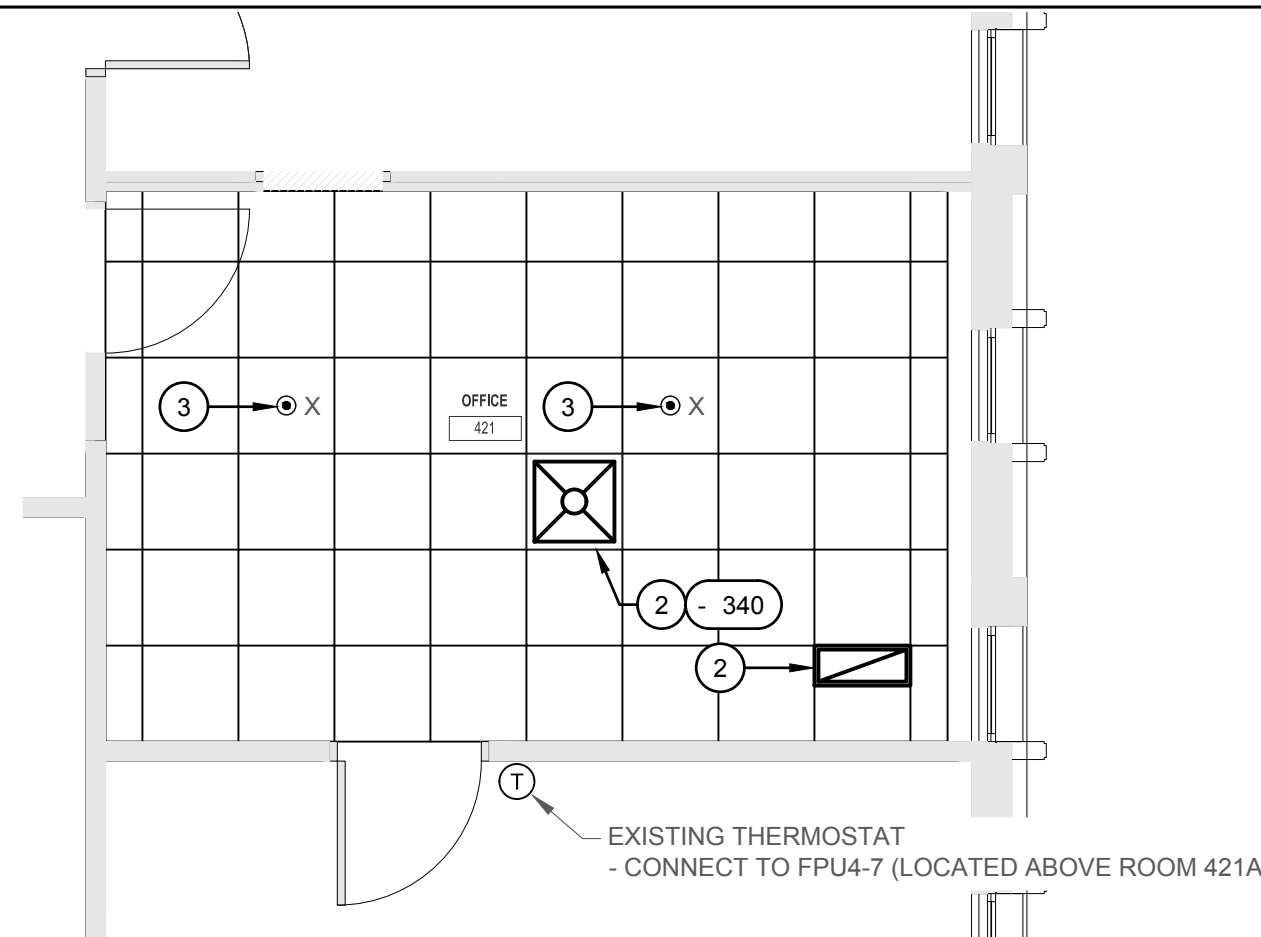


2 LEVEL 4 ROOM 421 - RENOVATION PLAN - MECHANICAL

MP1.1	$\frac{1}{4}" = 1'-0"$
-------	------------------------

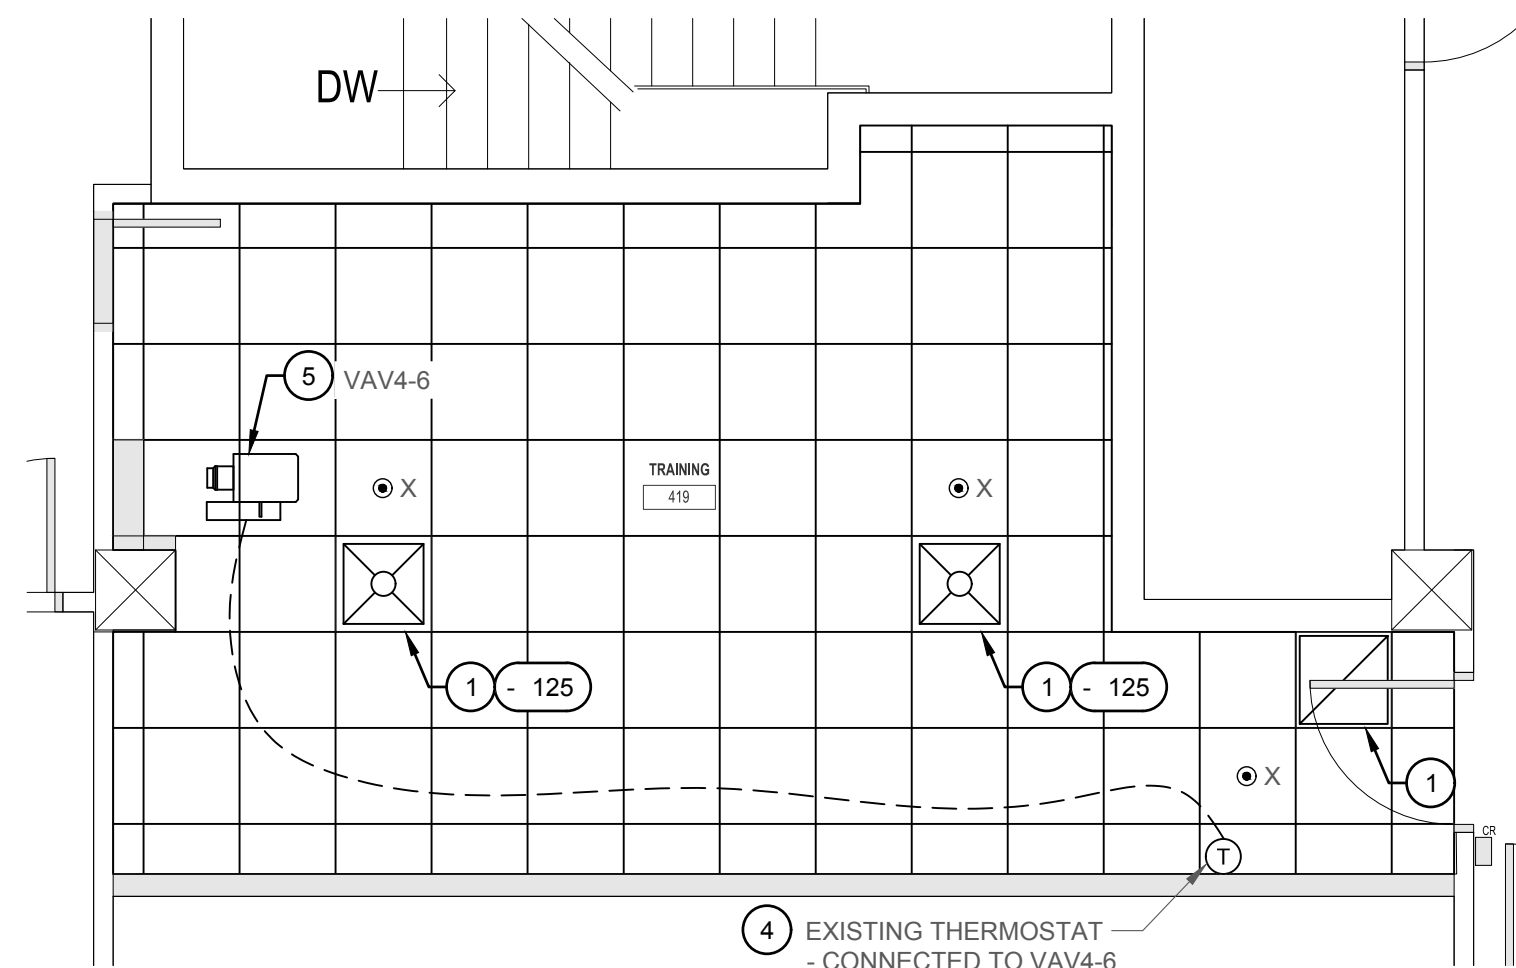



1 LEVEL 4 ROOM 419 - RENOVATION PLAN - MECHANICAL

MP1.1	1/4" = 1'-0"
-------	--------------




6 ISOMETRIC - GRAVITY PLUMBING

MP1.1	NO SCALE
-------	----------

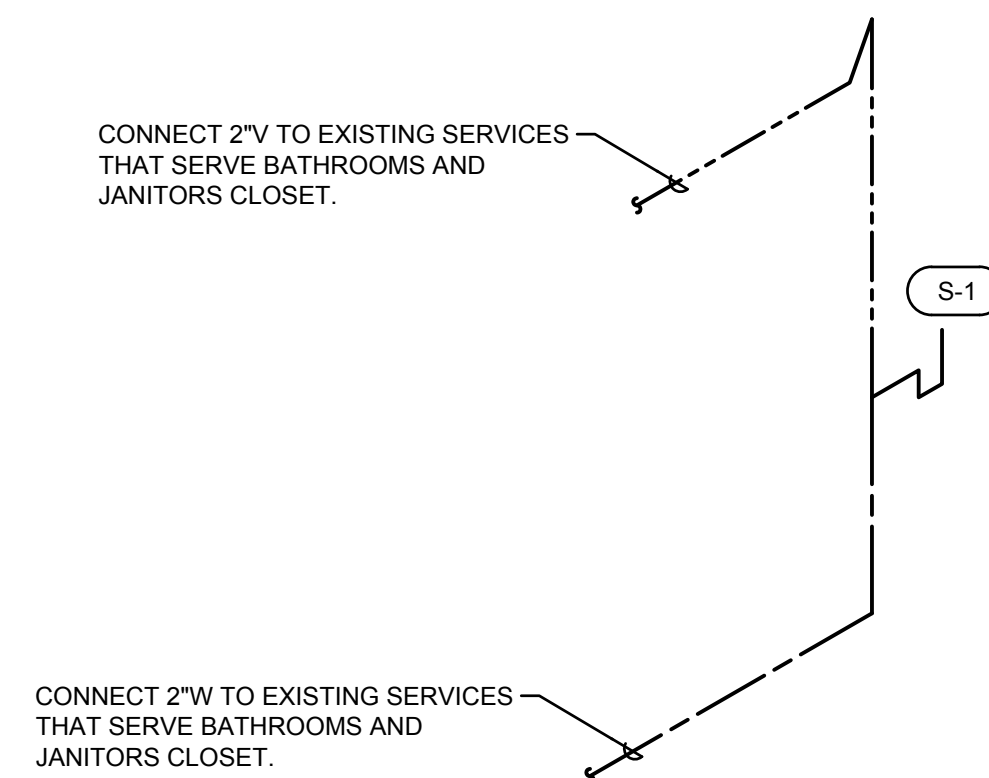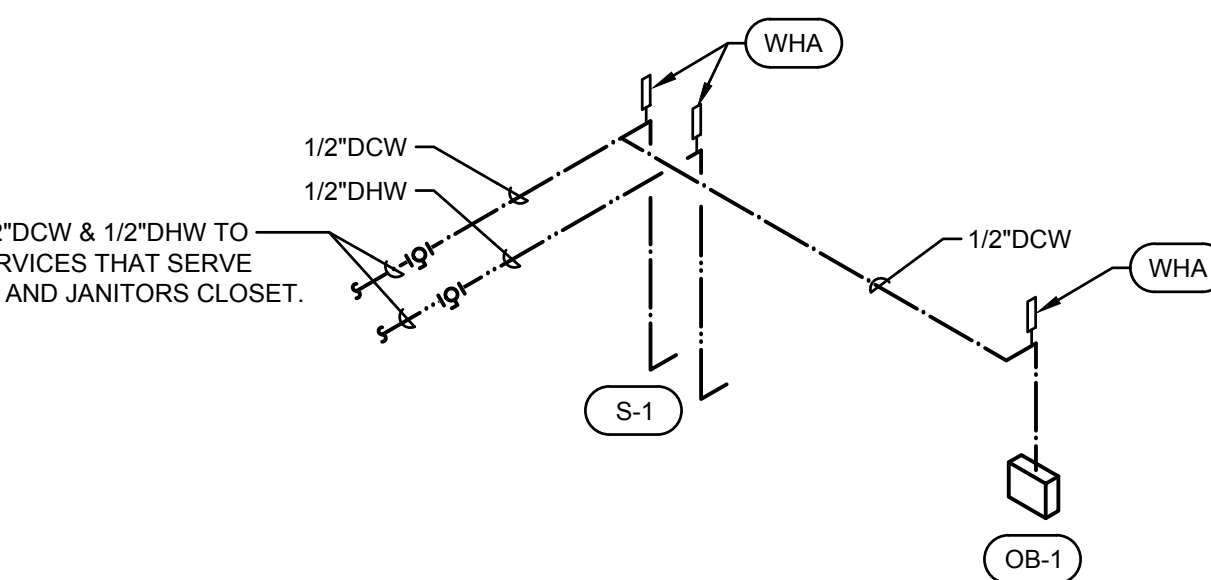

1940 Buford Blvd. - Tallahassee, FL 32302
Phone: 850-402-3040
Fax: 850-402-9659
Certificate of Authorization #: 29709
Tomahawk Project #: 23056

RICHARD LINDBURG
PE#: 62829
MICHAEL BOYLE
PE#: 76983

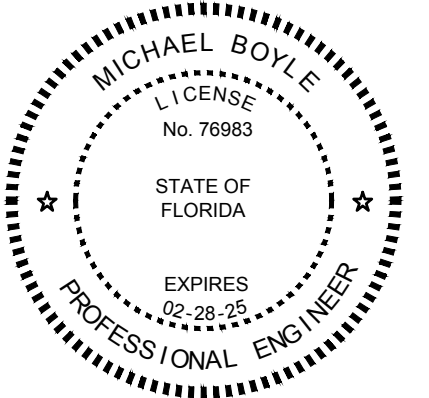

THIS ITEM HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY THE
ENGINEER INDICATED HEREIN WITH THE DATE AS INDICATED IN THE TIME
STAMP USING AN SHA CODE.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND
SEALED AND THE SHA AUTHENTICATION CODE MUST BE VERIFIED ON ANY
ELECTRONIC COPIES.


FSU BELLAMY
BUILDING

19480	Drawn By:	TKE
Project Code	Checked By:	WHT

03 NOVEMBER, 2023

100% CONTRACT
DOCUMENTS

Revisions

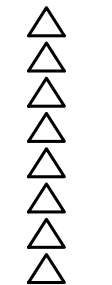

LEVEL 4 RENOVATION PLANS - MECHANICAL AND PLUMBING

Tallahassee Florida

MP1.1

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978

ELECTRICAL SPECIFICATIONS	
	DIVISION 26 AND 28 - ELECTRICAL
	<u>260010 BASIC ELECTRICAL REQUIREMENTS</u>
A	ALL WORK AND EQUIPMENT UNDER THIS DIVISION SHALL BE IN STRICT COMPLIANCE WITH THE CODES, STANDARDS AND PRACTICES LISTED HEREIN, AND THEIR RESPECTIVE DATES ARE FURNISHED AS THE MINIMUM LATEST REQUIREMENTS.
1	STATE OF FLORIDA
2	LIFE SAFETY CODE - NFPA 101 (2018)
3	UNDERWRITERS LABORATORIES, INC. PUBLICATIONS
4	NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)
5	AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)
6	NATIONAL ELECTRICAL CODE - NFPA 70 (2017)
7	NATIONAL ELECTRICAL MANUFACTURER'S ASSOCIATION (NEMA)
8	NATIONAL FIRE PROTECTION ASSOCIATION 72 (2016)
9	THE STATE FIRE PREVENTION CODE, 4A60.
10	BUILDING CODE: FLORIDA BUILDING CODE (2020), 7TH EDITION
B	SCOPE OF WORK: THE WORK PROVIDED UNDER THIS DIVISION SHALL INCLUDE ALL LABOR, MATERIALS, PERMITS, INSPECTIONS AND REINSPECTION FEES, TOOLS, EQUIPMENT, TRANSPORTATION, INSURANCE, TEMPORARY PROTECTION, TEMPORARY LIGHTING, SUPERVISION AND INCIDENTAL ITEMS ESSENTIAL FOR PROPER INSTALLATION AND OPERATION, EVEN THOUGH NOT SPECIFICALLY MENTIONED OR INDICATED BUT WHICH ARE USUALLY PROVIDED OR ARE ESSENTIAL FOR PROPER INSTALLATION AND OPERATION OF ALL ELECTRICAL SYSTEMS AS INDICATED IN CONTRACT DOCUMENTS.
C	NOTICES: GIVE ALL NOTICES, FILE ALL PLANS, PAY ALL FEES, OBTAIN ALL PERMITS AND APPROVALS FROM AUTHORITIES HAVING JURISDICTION. INCLUDE ALL FEES IN THE BID PRICE.
D	INTERPRETATION OF DRAWINGS:
1	THE DRAWINGS ARE DIAGRAMMATIC AND ARE NOT INTENDED TO SHOW EXACT LOCATIONS OF CONDUIT RUNS, OUTLET BOXES, JUNCTION BOXES, PULL BOXES, ETC. THE LOCATIONS OF EQUIPMENT, APPLIANCES, FIXTURES, CONDUITS, OUTLETS, BOXES AND SIMILAR DEVICES SHOWN ON THE DRAWINGS ARE APPROXIMATE ONLY. EXACT LOCATIONS SHALL BE AS ACCEPTED BY THE ENGINEER DURING CONSTRUCTION. OBTAIN IN THE FIELD ALL INFORMATION RELEVANT TO THE PLACING OF ELECTRICAL WORK AND IN CASE OF INTERFERENCE WITH OTHER WORK, PROCEED AS DIRECTED BY THE ENGINEER AND PROVIDE ALL LABOR AND MATERIALS NECESSARY TO COMPLETE THE WORK IN AN ACCEPTABLE MANNER.
2	DISCREPANCIES: NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES FOUND DURING CONSTRUCTION OF THE PROJECT AND DO NOT PROCEED WITH THAT PORTION OF THE PROJECT, UNTIL A WRITTEN DEFINITIVE STATEMENT IS RECEIVED PROVIDING CLEAR DIRECTION. IF A CONFLICT EXISTS BETWEEN THE CONTRACT DOCUMENTS AND ANY APPLICABLE CODE OR STANDARD, THE MOST STRINGENT REQUIREMENT SHALL BE INCLUDED FOR THIS PROJECT. THE ENGINEER SHALL MAKE THE DECISION REGARDING QUESTIONABLE AREAS OF CONFLICT.
E	INVESTIGATION ON SITE:
1	GENERAL: BEFORE COMMENCING THE WORK, VERIFY EXISTING CONDITIONS AT THE PREMISES INCLUDING, BUT NOT LIMITED TO, EXISTING STRUCTURAL FRAME, LOCATION AND ALL DIMENSIONS; EXISTING OPENINGS AND CHARACTERISTICS; EXISTING WALL AND PARTITION LOCATIONS, CHARACTERISTICS AND RELATIONSHIP TO EACH OTHER; EXISTING MECHANICAL AND ELECTRICAL WORK, EQUIPMENT TYPE, AND SHALL EXAMINE ALL ADJOINING WORK ON WHICH HIS WORK IF ANYWAY DEPENDENT FOR ITS PERFECT EFFICIENCY ACCORDING TO THE INTENT OF THE CONTRACT DOCUMENTS.
2	POWER OUTAGE: SPECIAL ATTENTION IS CALLED TO THE FACT THAT WORK INVOLVED IS IN CONNECTION WITH EXISTING BUILDINGS WHICH REMAIN IN OPERATION WHILE WORK IS BEING PERFORMED. WORK MUST BE DONE IN ACCORDANCE WITH THE PRIORITY SCHEDULE. SCHEDULE WORK FOR A MINIMUM OUTAGE TO OWNER. REQUEST WRITTEN PERMISSION AND RECEIVE WRITTEN ACCEPTANCE FROM THE OWNER NO LATER THAN 24 HOURS IN ADVANCE OF ALL POWER AND COMMUNICATION SHUT-DOWNS. PERFORM WORK REQUIRED AT OTHER THAN STANDARD WORKING HOURS WHERE OUTAGES CANNOT BE ACCEPTED BY OWNER DURING REGULAR WORKING HOURS. PROTECT EXISTING BUILDINGS AND EQUIPMENT DURING CONSTRUCTION.
3	SPECIAL CONSIDERATIONS: SPECIAL ATTENTION IS CALLED TO THE FACT THAT THERE WILL BE PIPING, FIXTURES OR OTHER ITEMS IN THE EXISTING BUILDING WHICH MUST BE REMOVED OR RELOCATED IN ORDER TO PERFORM THE ALTERATION WORK. BID SHALL INCLUDE ALL REMOVAL AND RELOCATION REQUIRED FOR COMPLETION OF THE ALTERATIONS AND THE NEW CONSTRUCTION.
4	OWNER'S SALVAGE: THE OWNER RESERVES THE RIGHT TO INSPECT THE MATERIAL SCHEDULED FOR REMOVAL AND SALVAGE ANY ITEMS HE DEEMS USABLE AS SPARE PARTS.
5	OWNER'S SALVAGE: THE OWNER RESERVES THE RIGHT TO INSPECT THE MATERIAL SCHEDULED FOR REMOVAL AND SALVAGE ANY ITEMS HE DEEMS USABLE AS SPARE PARTS.
F	EXISTING CONDITIONS:
1	SUPPORT: ALL EXISTING CONDUIT AND CABLES WITHIN THE AREA OF RENOVATION SHALL BE PROVIDED WITH PROPER SUPPORTS AS SPECIFIED FOR NEW WORK IN OTHER SECTIONS OF THIS SPECIFICATION.
2	INSTALLATION: ALL EXISTING ELECTRICAL WHICH IS DESIGNATED FOR REWORKING OR REQUIRES RELOCATION, REPAIR OR ADJUSTMENT SHALL CONFORM TO ALL APPLICABLE CODES AND SHALL BE TREATED AS NEW WORK COMPLYING TO ALL SECTIONS OF THIS SPECIFICATION.
3	VIOLATIONS: WHERE EXISTING CONDITIONS ARE DISCOVERED WHICH ARE NOT IN COMPLIANCE WITH THE CODES AND STANDARDS, THE CONTRACTOR SHALL SUBMIT PROPER DOCUMENTATION TO THE ARCHITECT FOR CLARIFICATION AND CORRECTIVE WORK DIRECTION. EXISTING CONDITIONS SHALL NOT REMAIN WHICH WILL CREATE A DISAPPROVAL OF THE RENOVATED AREA.
4	PATCHING: ALL EXISTING CONDUIT AND CABLE PENETRATIONS SHALL BE PROPERLY FIRE TREATED PER CODE AND SPECIFICATION REQUIREMENTS. THE CONTRACTOR SHALL THOROUGHLY INSPECT ALL EXISTING LOCATIONS AND INCLUDE THE COST OF PATCHING AND REPAIR IN HIS PROPOSED CONSTRUCTION COST.
G	ALL MATERIALS SHALL BE NEW, FREE FROM DEFECTS AND SHALL BE EITHER U.L. LABELED, U.L. LISTED OR BEAR THE SEAL OF A NATIONALLY RECOGNIZED ELECTRICAL TESTING LABORATORY.
H	SHOP DRAWINGS ARE REQUIRED FOR ALL MATERIALS AND EQUIPMENT EXCLUDING CONDUIT, WIRE, AND WIRING DEVICES.
I	ALL EQUIPMENT SHALL BE FIRMLY MOUNTED USING APPROVED HANGERS ATTACHED TO STRUCTURAL PORTIONS OF THE BUILDING, SUPPORTING WITH TIE WIRE IS PROHIBITED. LIGHT FIXTURES RECESSED IN CEILINGS SHALL BE SUPPORTED FROM THE BUILDING STRUCTURE INDEPENDENT OF THE CEILING SYSTEM.
J	TEMPORARY LIGHT AND POWER SHALL BE PROVIDED AS REQUIRED.

ELECTRICAL SPECIFICATIONS	
	<u>260519 WIRES AND CABLES</u>
A	ALL BRANCH CIRCUITS AND FEEDERS SHALL BE COPPER WITH THHN OR THWN INSULATION. MINIMUM SIZE #12 AWG. SIZES #10 AWG AND SMALLER SHALL BE SOLID.
B	COLOR CODING SHALL COMPLY WITH THE NATIONAL ELECTRIC CODE, 2017 EDITION SPECIFICALLY. PHASE CONDUCTORS OF EACH VOLTAGE SYSTEM MUST BE OF A DIFFERENT COLOR. NEUTRALS SHALL BE WHITE FOR 120/208 AND GRAY FOR 277/480. EQUIPMENT GROUNDING CONDUCTORS SHALL BE GREEN INSULATED.
C	ALL SINGLE PHASE CIRCUITS SHALL HAVE DEDICATED NEUTRAL CONDUCTORS. NO NEUTRAL CONDUCTORS SHALL BE SHARED.
	<u>260533 RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS</u>
A	OUTLET BOXES SHALL BE ONE PIECE OR PROJECTION WELDED, GALVANIZED STAMPED STEEL FOR GANG SIZES REQUIRED. SECTIONAL BOXES ARE NOT ACCEPTABLE. BOXES SHALL BE 4" SQUARE AND 1-1/2" DEEP GENERALLY. LARGER BOXES SHALL BE USED AS REQUIRED BY CODE.
B	RACEWAYS AND FITTINGS:
1	ALL WIRING SHALL BE INSTALLED IN APPROPRIATE RACEWAY SYSTEMS OF RIGID GALVANIZED CONDUIT, ELECTRIC METALLIC TUBING, FLEXIBLE STEEL CONDUIT AND LIQUID-TIGHT FLEXIBLE CONDUIT AS CONDITIONS AND CODES DICTATE. EMT SHALL BE JOINED WITH STEEL COMPRESSION TYPE FITTINGS.
2	FLEXIBLE CONDUIT SHALL BE USE ONLY FOR FIXTURE WHIPS AND SHALL NOT EXCEED 72".
3	ALL CONDUIT SHALL HAVE AN INSULATED COPPER EQUIPMENT GROUNDING CONDUCTOR THROUGHOUT THE ENTIRE LENGTH OF THE CIRCUIT WITHIN THE CONDUIT.
	<u>260553 ELECTRICAL IDENTIFICATION</u>
A	LANGUAGE ALL IDENTIFICATION SHALL BE IN ENGLISH.
B	EQUIPMENT SYSTEM MARKERS SHALL BE ENGRAVED PLASTIC, LAMINATE NAMEPLATES AND SHALL BE ADHESIVE OR PRE-TENSIONED SNAP ON COLOR CODED, SYSTEM MARKING MATERIALS.
C	CONDUIT, RACEWAYS, BOXES, ETC. SHALL BE SPOT PAINTED. CONDUIT SHALL BE IDENTIFIED WITHIN 6 INCHES OF THE BOX OR ENCLOSURE. THE ENTIRE BOX COVER PLATE SHALL BE PAINTED.
D	USE FOLLOWING COLORS FOR COLOR BANDS AND FOR COLOR CODING:
E	CABLE AND CONDUCTOR IDENTIFICATION WILL BE AS PER NFPA 70.
	<u>262726 WIRING DEVICES</u>
A	ALL RECEPTACLES SHALL BE 20 AMP, 125 VOLT GROUNDING TYPE, (SPECIFICATION GRADE) AND MOUNTED AT 18" AFF.
B	SWITCHES SHALL BE 20 AMP, 125V SILENT TYPE, SPECIFICATION GRADE, AND MOUNTED AT 48" AFF.
C	DEVICE PLATES SHALL BE STAINLESS STEEL TO MATCH EXISTING WALL PLATES. DEVICE COLORS SHALL MATCH EXISTING.
D	APPROVED MANUFACTURERS: HUBBEL, PASS & SEYMOR, LEVITON.
	<u>265119 LIGHTING</u>
1	LIGHTING SHALL BE DESIGNED FOR TYPE OF TASK INVOLVED. LED.
2	EXIT LIGHTS AND EMERGENCY EGRESS LIGHTING SHALL BE SERVED BY AN UN-SWITCHED CONDUCTOR FROM THE SAME CIRCUIT AS NORMAL CONTROLS.
	<u>283113 FIRE ALARM SYSTEM EXTENSIONS</u>
A	FIRE ALARM AND DETECTION: PROVIDE ADDITIONS TO EXISTING SYSTEM AS INDICATED ON DRAWINGS. ALL WIRING SHALL BE IN CONDUIT, 3/4" MINIMUM.
B	TEST SYSTEM AS REQUIRED BY NFPA 72 AND AS DIRECTED BY SYSTEM MANUFACTURER.
	<u>270528 PATHWAYS FOR COMMUNICATION SYSTEMS</u>
A	TELEPHONE/DATA SYSTEM: PROVIDE AN EMPTY RACEWAY SYSTEM READY FOR CABLING. PROVIDE CONDUIT, OUTLET BOXES AND MEANS FOR PULLING CABLE.
B	UNLESS OTHERWISE NOTED PROVIDE 1" CONDUIT FROM EACH COMMUNICATION OUTLET TO ABOVE CEILING.
C	CABLING WILL BE INSTALLED UNDER A SEPARATE CONTRACT.

PANEL: PRIV3 (EXISTING)

FED FROM: 45KVA XFMR T5A

MOUNTING: SURFACE

ENCLOSURE: NEMA 1

VOLTAGE: 120/208V-3PH-4W

BRANCH: NORMAL

A/C RATING: 10,000A

MAINS: 150/3 MCB

CKT. NO.	BKR.	DESCRIPTION	PHASE A	PHASE B	PHASE C	DESCRIPTION	BKR.	CKT. NO.
1	20/1	REC 464, 467	360	1080		REC 466	20/1	2
3	20/1	REC 461, 463		1080	540	REC 462	20/1	4
5	20/1	REC 453, 454			1080	REC 462	20/1	6
7	20/1	REC 456, 458	1080	1080		REC 462	20/1	8
9	20/1	REC 459, 460		1080	1080	REC 450, 455	20/1	10
11	20/1	REC 444,445			1080	REC 433B, 457	20/1	12
13	20/1	REC 447, 449	1080	1080		REC433A, 462	20/1	14
15	20/1	REC 451, 452		1080	1080	REC 437	20/1	16
17	20/1	REC 441, 442			1080	REC 439, 446	20/1	18
19	20/1	REC 438, 440	1080	1080		REC 434, 448	20/1	20
21	20/1	REC 435, 436		1080	1080	REC 436	20/1	22
23	20/1	REC 431, 432			1080	REC 430	20/1	24
25	20/1	REC 427, 429	1080	1080		REC 430	20/1	26
27	20/1	REC 423,425		1080	1500	EWVH	20/2	28
29	20/1	REC 457			1080	1500	----	---
31	20/1	SPARE		100		FACP	20/1	32
33	20/1	SPARE			1200	COPIER 467	20/1	34
35	20/1	HVAC CONTROLS			100	800 REC REFR CONF. 430	*20/1	36
37	20/1	SPACE		1200		REC CASEWORK CONF. 430	*20/1	38
39	20/1	SPACE			1200	REC CASEWORK CONF. 430	*20/1	40
41	20/1	SPACE				SPACE	20/1	42
			11380	13080	11580			

NOTES:

1. EXISTING PANEL IS A SIEMENS TYPE S1 WITH BL BREAKERS.

2. BREAKERS INDICATED AS BOLD/DARK ARE MODIFIED AS PART OF THIS PROJECT.BREAKERS INDICATED AS GREY/LIGHT ARE EXISTING TO REMAIN.

3. *PROVIDE THE INDICATED BREAKER.

4. PROVIDE AN UPDATED AND TYPEWRITTEN NEW PANEL SCHEDULE IN ACCORDANCE WITH NEC 408.

5. EXISTING LOADS ARE BASED ON EXISTING "AS-BUILT" DRAWINGS.

	CONNECTED LOADS		DEMAND LOADS	
	VA	AMPS	VA	AMPS
LIGHTING	720	2	720	2
RECEPTACLES	38650	107	24325	68
MOTORS	0	0	0	0
MISCELLANEOUS	4700	13	2820	8
TOTAL (AVERAGE PER PHASE)	44070	122	27865	77

MINIMUM OVERCURRENT PROTECTION (125% OF TOTAL DEMAND LOAD) =

97

ABBREVIATIONS	
ABBREVIATION	DESCRIPTION
A	AMPERES
AC	ABOVE COUNTER
AF	ABOVE FINISHED FLOOR
AWG	AMERICAN WIRE GAGE
BKR	BREAKER
C	CONDUIT
CKT	CIRCUIT
GND OR G	GROUND
GFI	GROUND FAULT CIRCUIT INTERRUPTER
KVA	KILO-VOLT AMPERES
KW	KILOWATT
MCB	MAIN CIRCUIT BREAKER
MLO	MAIN LUGS ONLY
PH OR Ø	PHASE
PNL	PANEL
(R)	ITEM RELOCATED BY CONTRACTOR
REC	RECEPTACLE
V	VOLTS
VA	VOLT AMPS
W	WATTS
W	WIRE
(X)	EXISTING TO REMAIN
(XD)	EXISTING TO BE DEMOLISHED
XFMR	TRANSFORMER
(XR)	ITEM TO BE RELOCATED BY THE CONTRACTOR REFER TO CORRESPONDING (R) FOR NEW LOCATION EXISTING TO BE DEMOLISHED


ELECTRICAL SYMBOL LEGEND	
SYMBOL	DESCRIPTION
<u>GENERAL</u>	
	CONCEALED RACEWAY AND BRANCH CIRCUIT WIRING SYSTEM.
	HOMERUN. LETTER INDICATES PANEL, NUMBER INDICATES CIRCUIT. 2-12 AWG, 12 G, 1/2"C UNLESS OTHERWISE NOTED.
	INDICATES DETAIL/SECTION NUMBER INDICATES SHEET NUMBER
	SURFACE RACEWAY AND BRANCH CIRCUIT WIRING SYSTEM. WIREMOLD 700 IN FINISHED AREAS, EMT IN UNFINISHED AREAS.
<u>FIRE ALARM</u>	
	ALERT STROBE LIGHT. WALL MOUNTED 80" ABOVE FLOOR TO BOTTOM.
<u>SECURITY SYSTEM</u>	
	CARD READER UNIT. WALL MOUNTED 46" ABOVE FLOOR TO CENTERLINE. REFER TO DETAIL.
	ACCESS CONTROL REQUEST TO EXIST OCCUPANCY SENSOR. CEILING MOUNTED.
<u>LIGHTING</u>	
	2 FT X 4 FT NORMAL BRANCH RECESSED LED FIXTURE. LOWER CASE LETTER INDICATES SWITCH LEG.
	2 FT X 4 FT LIFE SAFETY/EMERGENCY BRANCH RECESSED LED FIXTURE. LOWER CASE LETTER INDICATES SWITCH LEG
	2 FT X 2 FT NORMAL BRANCH RECESSED LED FIXTURE LOWER CASE LETTER INDICATES SWITCH LEG
	2 FT X 2 FT LIFE SAFETY/EMERGENCY BRANCH RECESSED LED FIXTURE LOWER CASE LETTER INDICATES SWITCH LEG.
	EMERGENCY LIGHTING DIMMING CONTROLLER, UL 924 LISTED. CEILING MOUNTED. REFER TO DETAIL.
	SINGLE POLE TOGGLE SWITCH. LETTER INDICATES SWITCH LEG. 46" ABOVE FLOOR TO CENTERLINE.
	0-10V DIMMER SWITCH. LETTER INDICATES SWITCH LEG. PROVIDE TYPE COMPATABLE WITH LAMP BEING DIMMED.
	0-10V DIMMER SWITCH WITH OCCUPANCY SENSOR . LETTER INDICATES SWITCH LEG. PROVIDE TYPE COMPATIBLE WITH LAMP BEING DIMMED.
	DUAL TECH. LOW VOLTAGE OCCUPANCY SENSOR, 360 DEGREE CEILING MOUNTED, WATT STOPPER DT-300 OR EQUIVALENT . PROVIDE WITH POWER PACK. LOWER CASE LETTER INDICATES SWITCH LEG.
	BLUE ALARM LIGHT, CEILING MOUNTED
<u>POWER & DEVICE</u>	
	NORMAL BRANCH DUPLEX CONVENIENCE OUTLET. 18"AF TO BOTTOM UNLESS OTHERWISE NOTED.
	NORMAL BRANCH SIMPLEX OUTLET TYPE AS NOTED. 18"AF TO CENTERLINE UNLESS OTHERWISE NOTED.
	CRITICAL BRANCH SIMPLEX OUTLET TYPE AS NOTED. 18"AF TO CENTERLINE UNLESS OTHERWISE NOTED.
	SURFACE MOUNTED NORMAL BRANCH DUPLEX CONVENIENCE OUTLET. 18"AF TO BOTTOM UNLESS OTHERWISE NOTED.
	SURFACE MOUNTED NORMAL BRANCH TWO DUPLEX CONVENIENCE OUTLETS IN COMMON BOX. 18"AF TO BOTTOM UNLESS OTHERWISE NOTED.
	TELE/DATA OUTLET. 18" ABOVE FLOOR TO BOTTOM UNLESS OTHERWISE NOTED
	LIGHTING PANEL BOARD. 72" ABOVE FLOOR TO TOP OF PANEL.
	NORMAL BRANCH JUNCTION BOX OR EQUIPMENT WALL MOUNTED CONNECTION. EQUIPMENT TYPE AS INDICATED.
	NORMAL BRANCH JUNCTION BOX OR EQUIPMENT CONNECTION . EQUIPMENT TYPE AS INDICATED.
	AUDIO/VIDEO OUTLET. 18" ABOVE FLOOR TO BOTTOM UNLESS OTHERWISE NOTED. REFER TO DETAIL.
	NORMAL BRANCH DUPLEX CONVENIENCE OUTLETS IN COMMON BOX ABOVE COUNTER 4" ABOVE BACK SPLASH TO CENTERLINE UNLESS OTHERWISE NOTED. GFI

LIGHTING FIXTURE SCHEDULE					
TYPE	LAMPS #	LAMPS DESCRIPTION	LUMINAIRE DESCRIPTION	MANUFACTURER	CATALOG #
R1	NA	LED 3465 LUMENS 35W 4000K >= 80CRI	CONTEMPORARY ARCHITECTURAL 2FT X 2 FT TROFFER WITH DIE-CAST ALUMINUM FRAME, FLAT OPTIC, LOW GLARE MICRO PRISMATIC LENS, 0-10V DIMMING TO 1%, UNIVERSAL POWER SUPPLY.	ALCON LIGHTING OR EQUIVALENT	14123-22-35



1940 Buford Blvd. - Tallahassee, FL 32302
Phone: 850-402-3040
Fax: 850-402-9659
Certificate of Authorization #: 29709
Tomahawk Project #: 23056

RICHARD LINDBURG
PE#: 62829
MICHAEL BOYLE
PE#: 76983

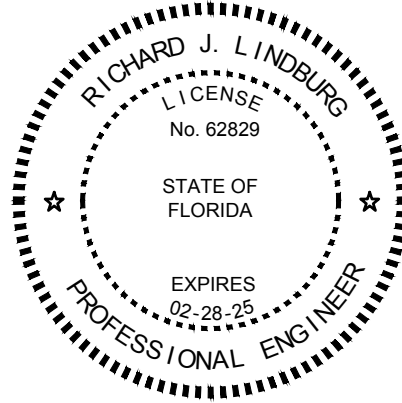

THIS SEAL HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY THE ENGINEER INDICATED HEREIN WITH THE DATE AS INDICATED IN THE TIME STAMP BEING AN SHA CODE.
PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SHA AUTHENTICATION CODE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.



FSU BELLAMY BUILDING

19480 Drawn By: BCP
Project Code Checked By: RJL

03 NOVEMBER, 2023

Date

100% CONTRACT DOCUMENTS




Revisions

△
△
△
△
△
△
△
△
△

SYMBOLS ABBREVIATIONS AND SCHEDULES


Tallahassee Florida

E0.1

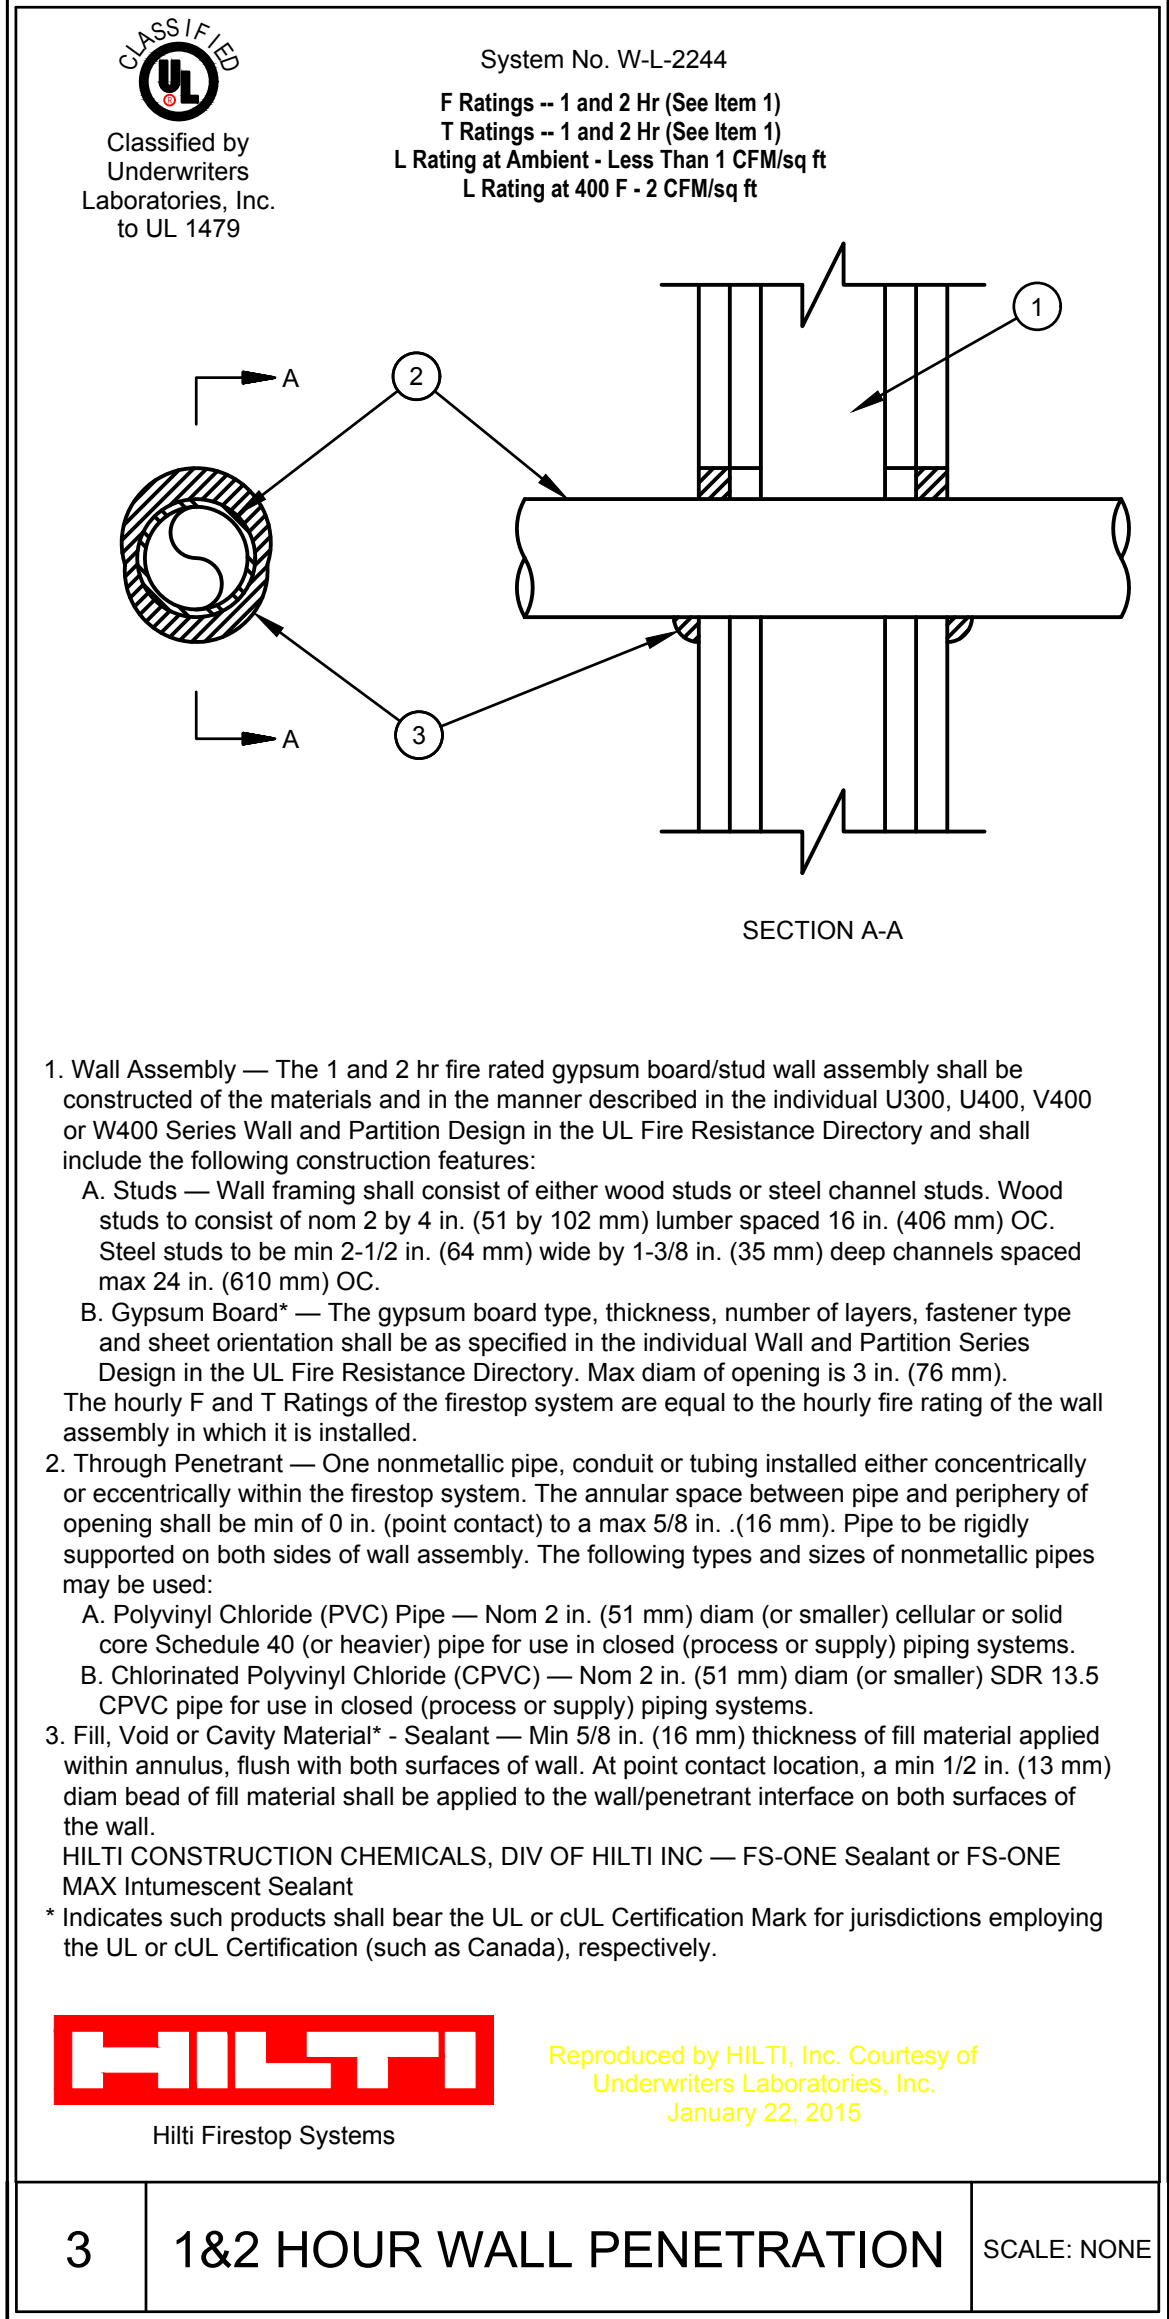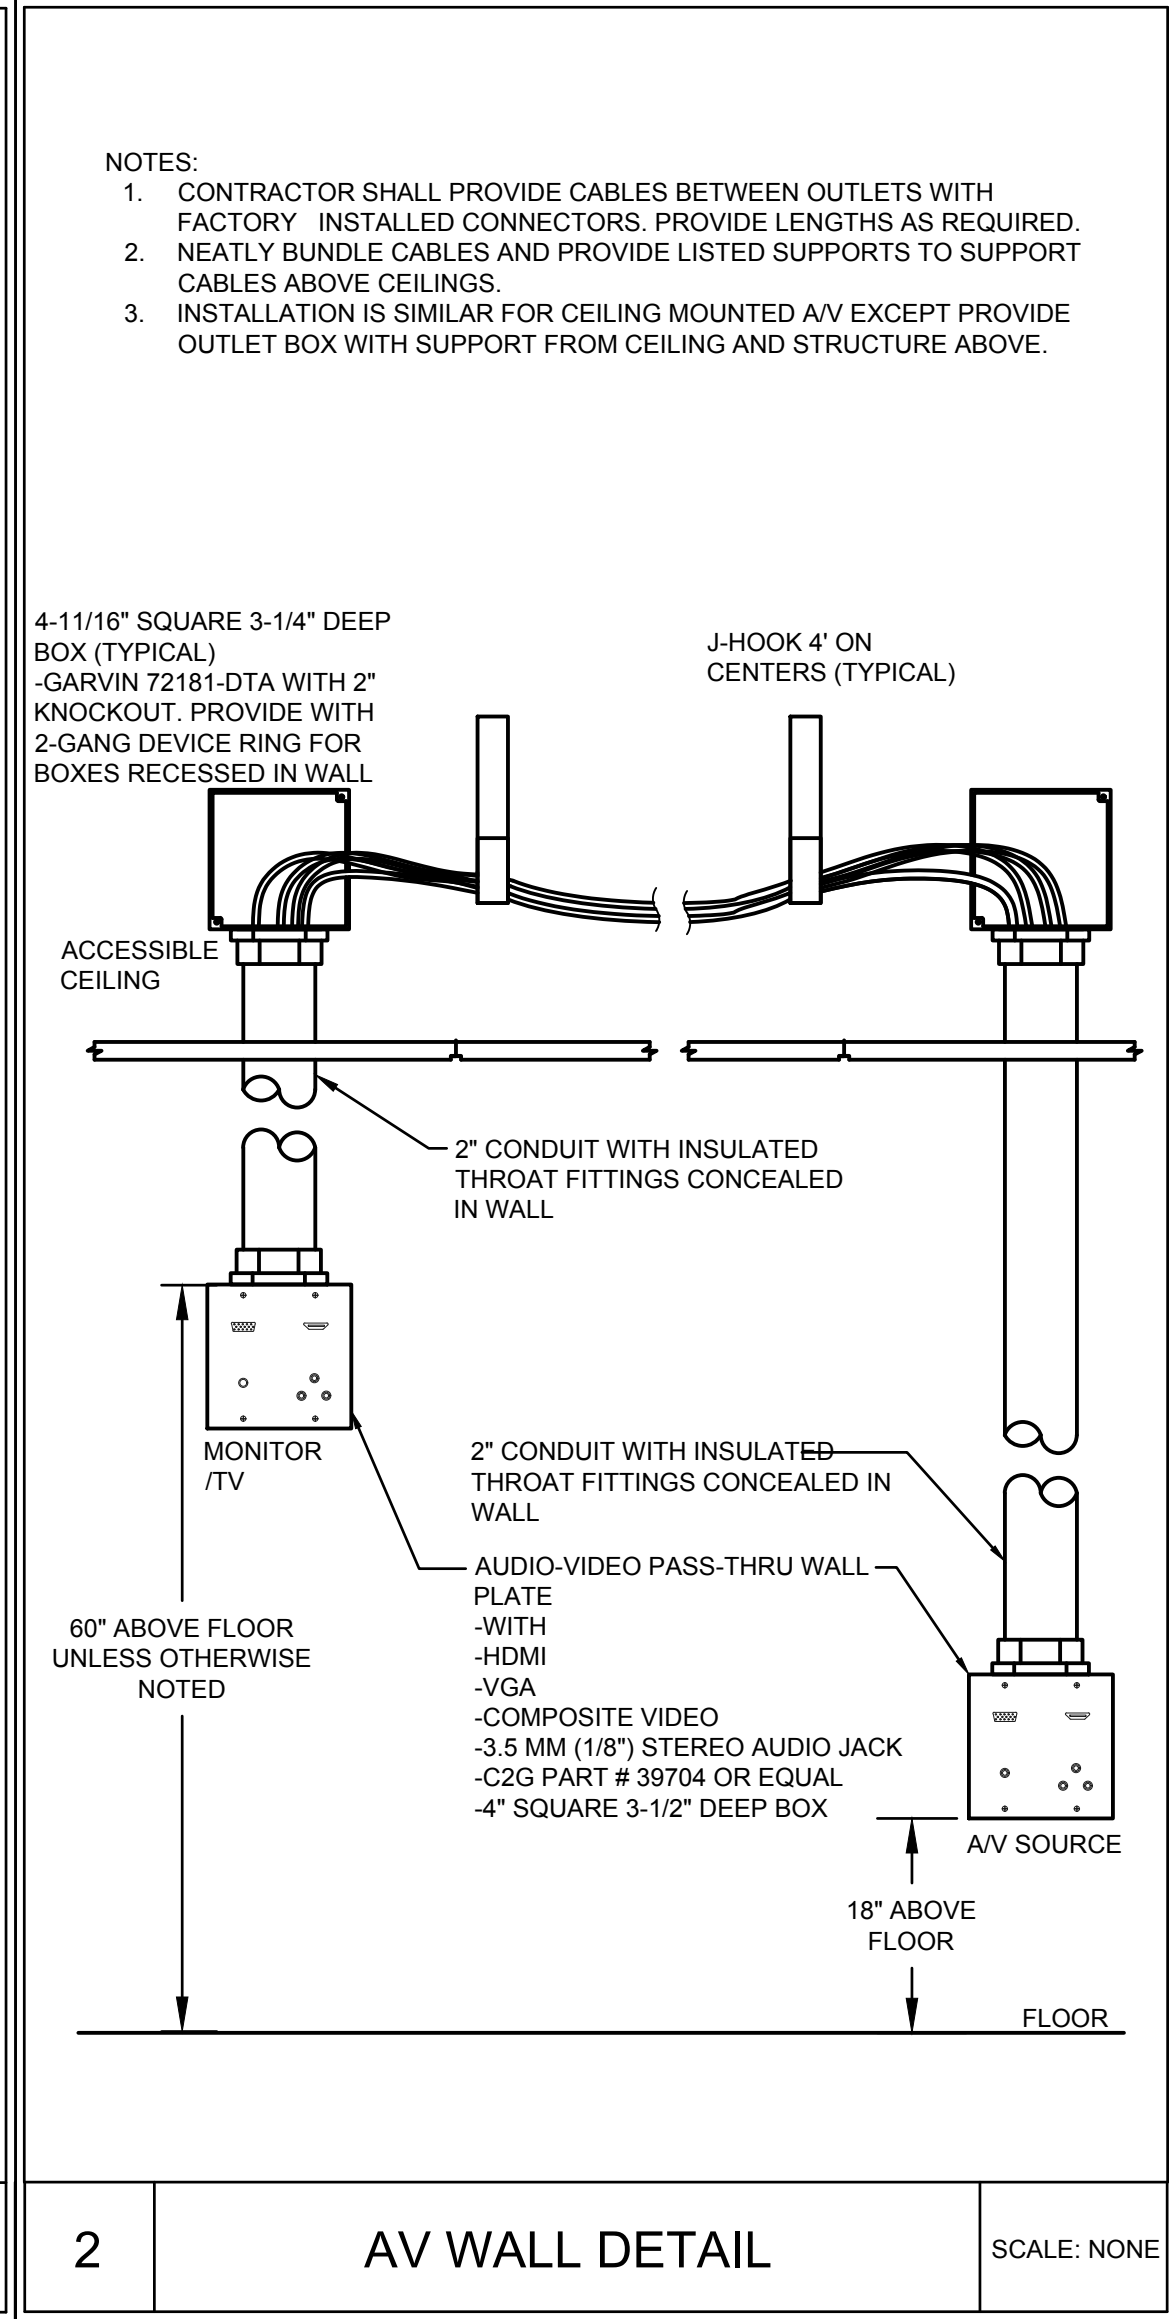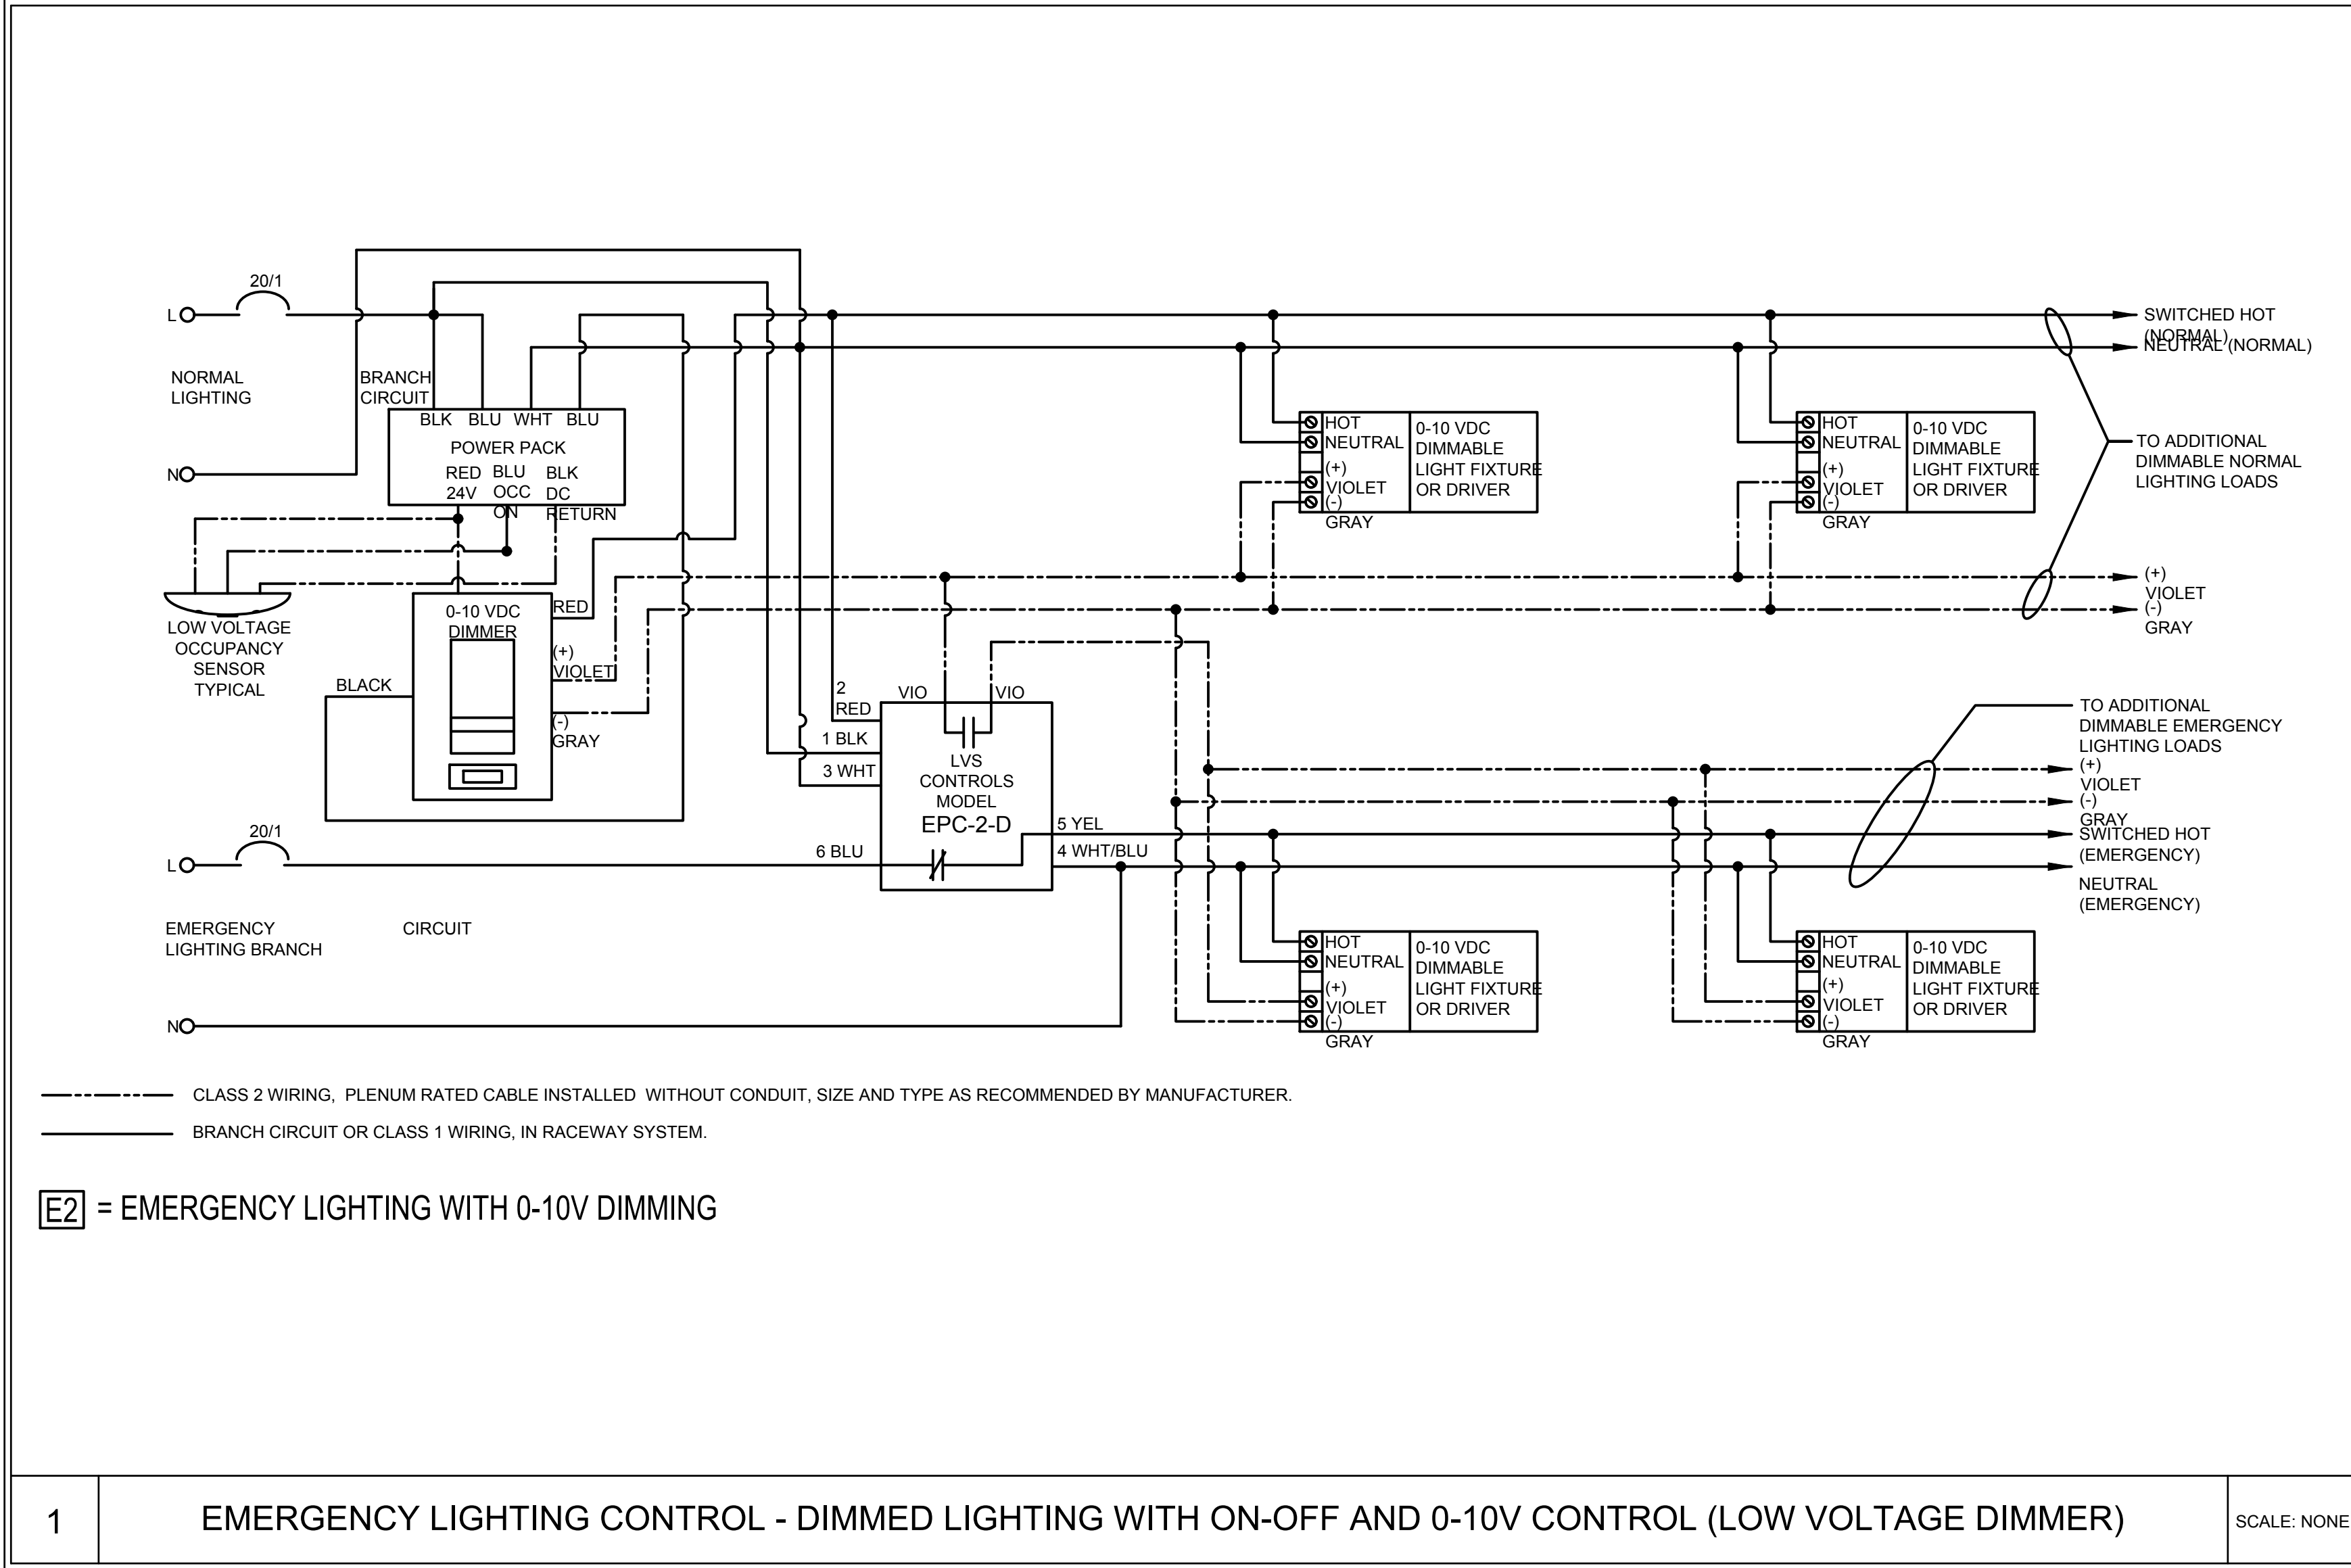

1940 Buford Blvd. - Tallahassee, FL 32302
Phone: 850-402-3040
Fax: 850-402-9659
Certificate of Authorization #: 29709
Tomahawk Project #: 23056

RICHARD LINDBURG
PE#: 62829
MICHAEL BOYLE
PE#: 76983

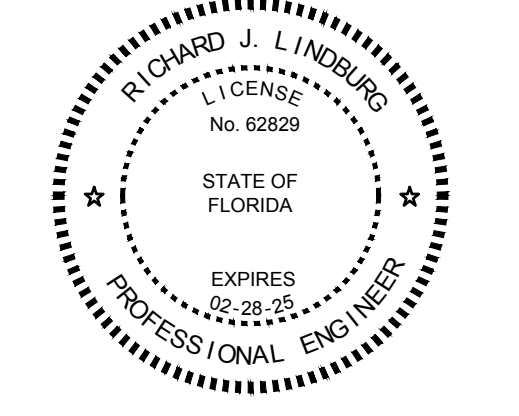

THIS ITEM HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY THE ENGINEER INDICATED HEREIN WITH THE DATE AS INDICATED IN THE TIME STAMP USING AN S&S CODE.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE S&S AUTHENTICATION CODE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.



FSU BELLAMY BUILDING

19480 Drawn By: BCP
Project Code Checked By: RJL

03 NOVEMBER, 2023
Date

100% CONTRACT DOCUMENTS

Revisions
▲
▲
▲
▲
▲
▲
▲

DETAILS - ELECTRICAL


Tallahassee Florida

E0.2



1940 Buford Blvd. - Tallahassee, FL 32302
Phone: 850-402-3040
Fax: 850-402-9659
Certificate of Authorization #: 29709
Tomahawk Project #: 23056

RICHARD LINDBURG
PE#: 62829
MICHAEL BOYLE
PE#: 76983

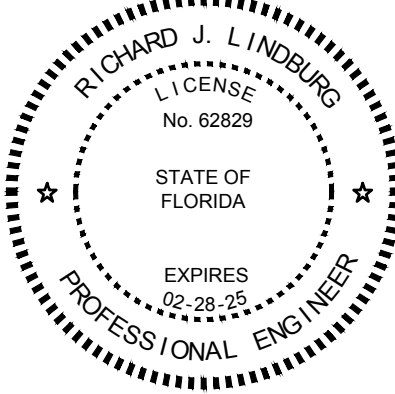

THIS ITEM HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY THE ENGINEER INDICATED HEREIN WITH THE DATE AS INDICATED IN THE TIME STAMP USING AN SHA CODE.
PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SHA AUTHENTICATION CODE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.



FSU BELLAMY BUILDING

19480 Drawn By: BCP
Project Code Checked By: RJL

Date 03 NOVEMBER, 2023

100% CONTRACT DOCUMENTS

Revisions


- ▲
- ▲
- ▲
- ▲
- ▲
- ▲
- ▲

LEVEL 4 OVERALL PLAN - ELECTRICAL


Tallahassee Florida

E1.0

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978

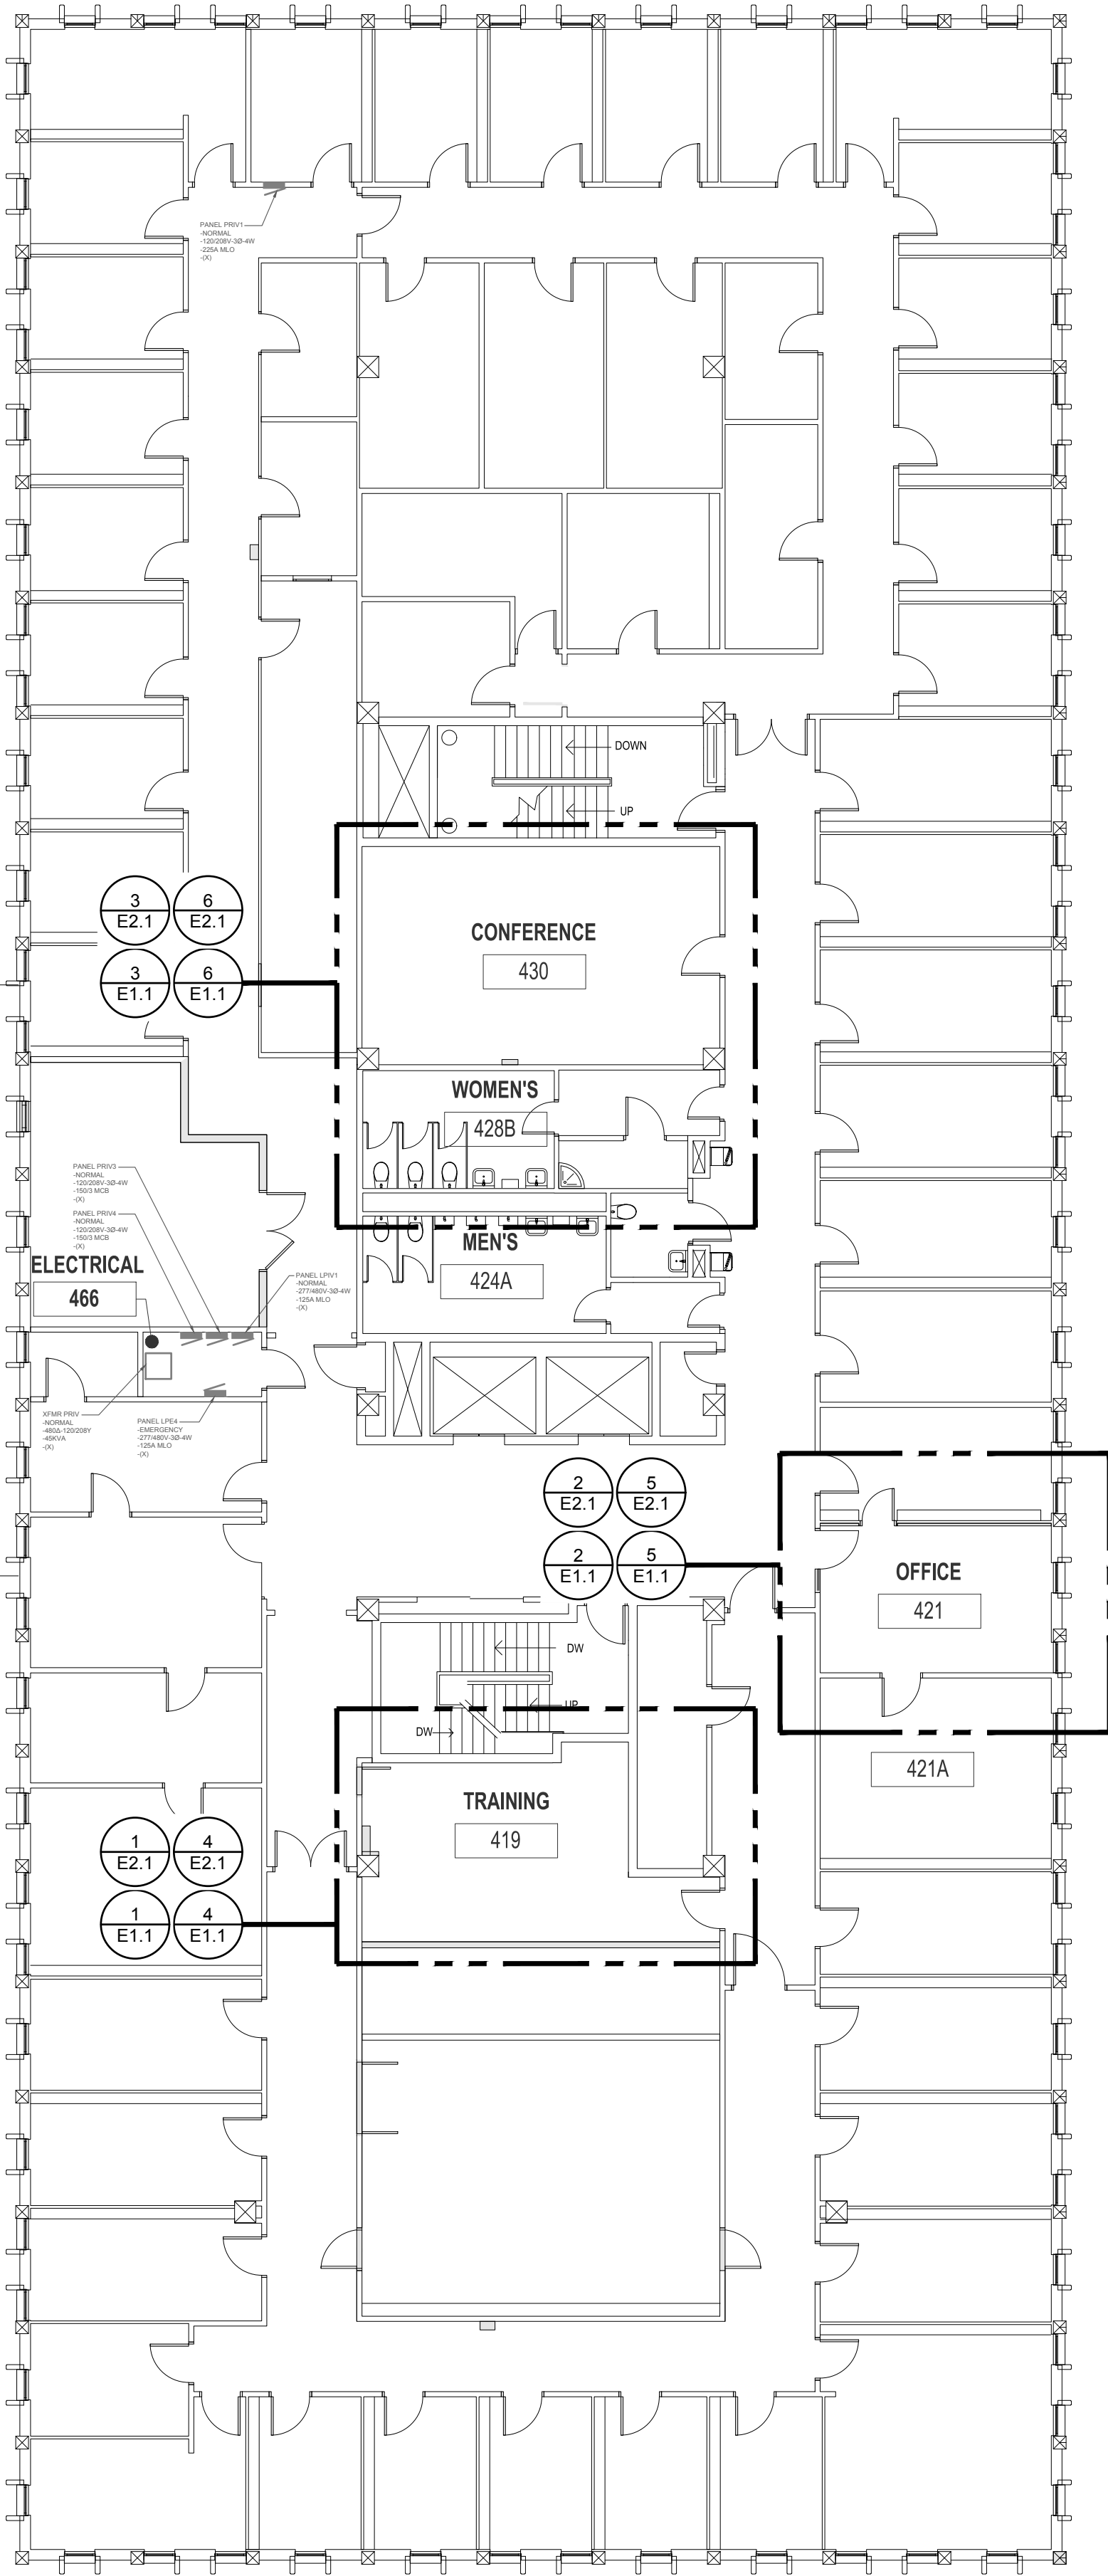


1 LEVEL 4 OVERALL PLAN - ELECTRICAL
E1.0 3/32" = 1'-0"

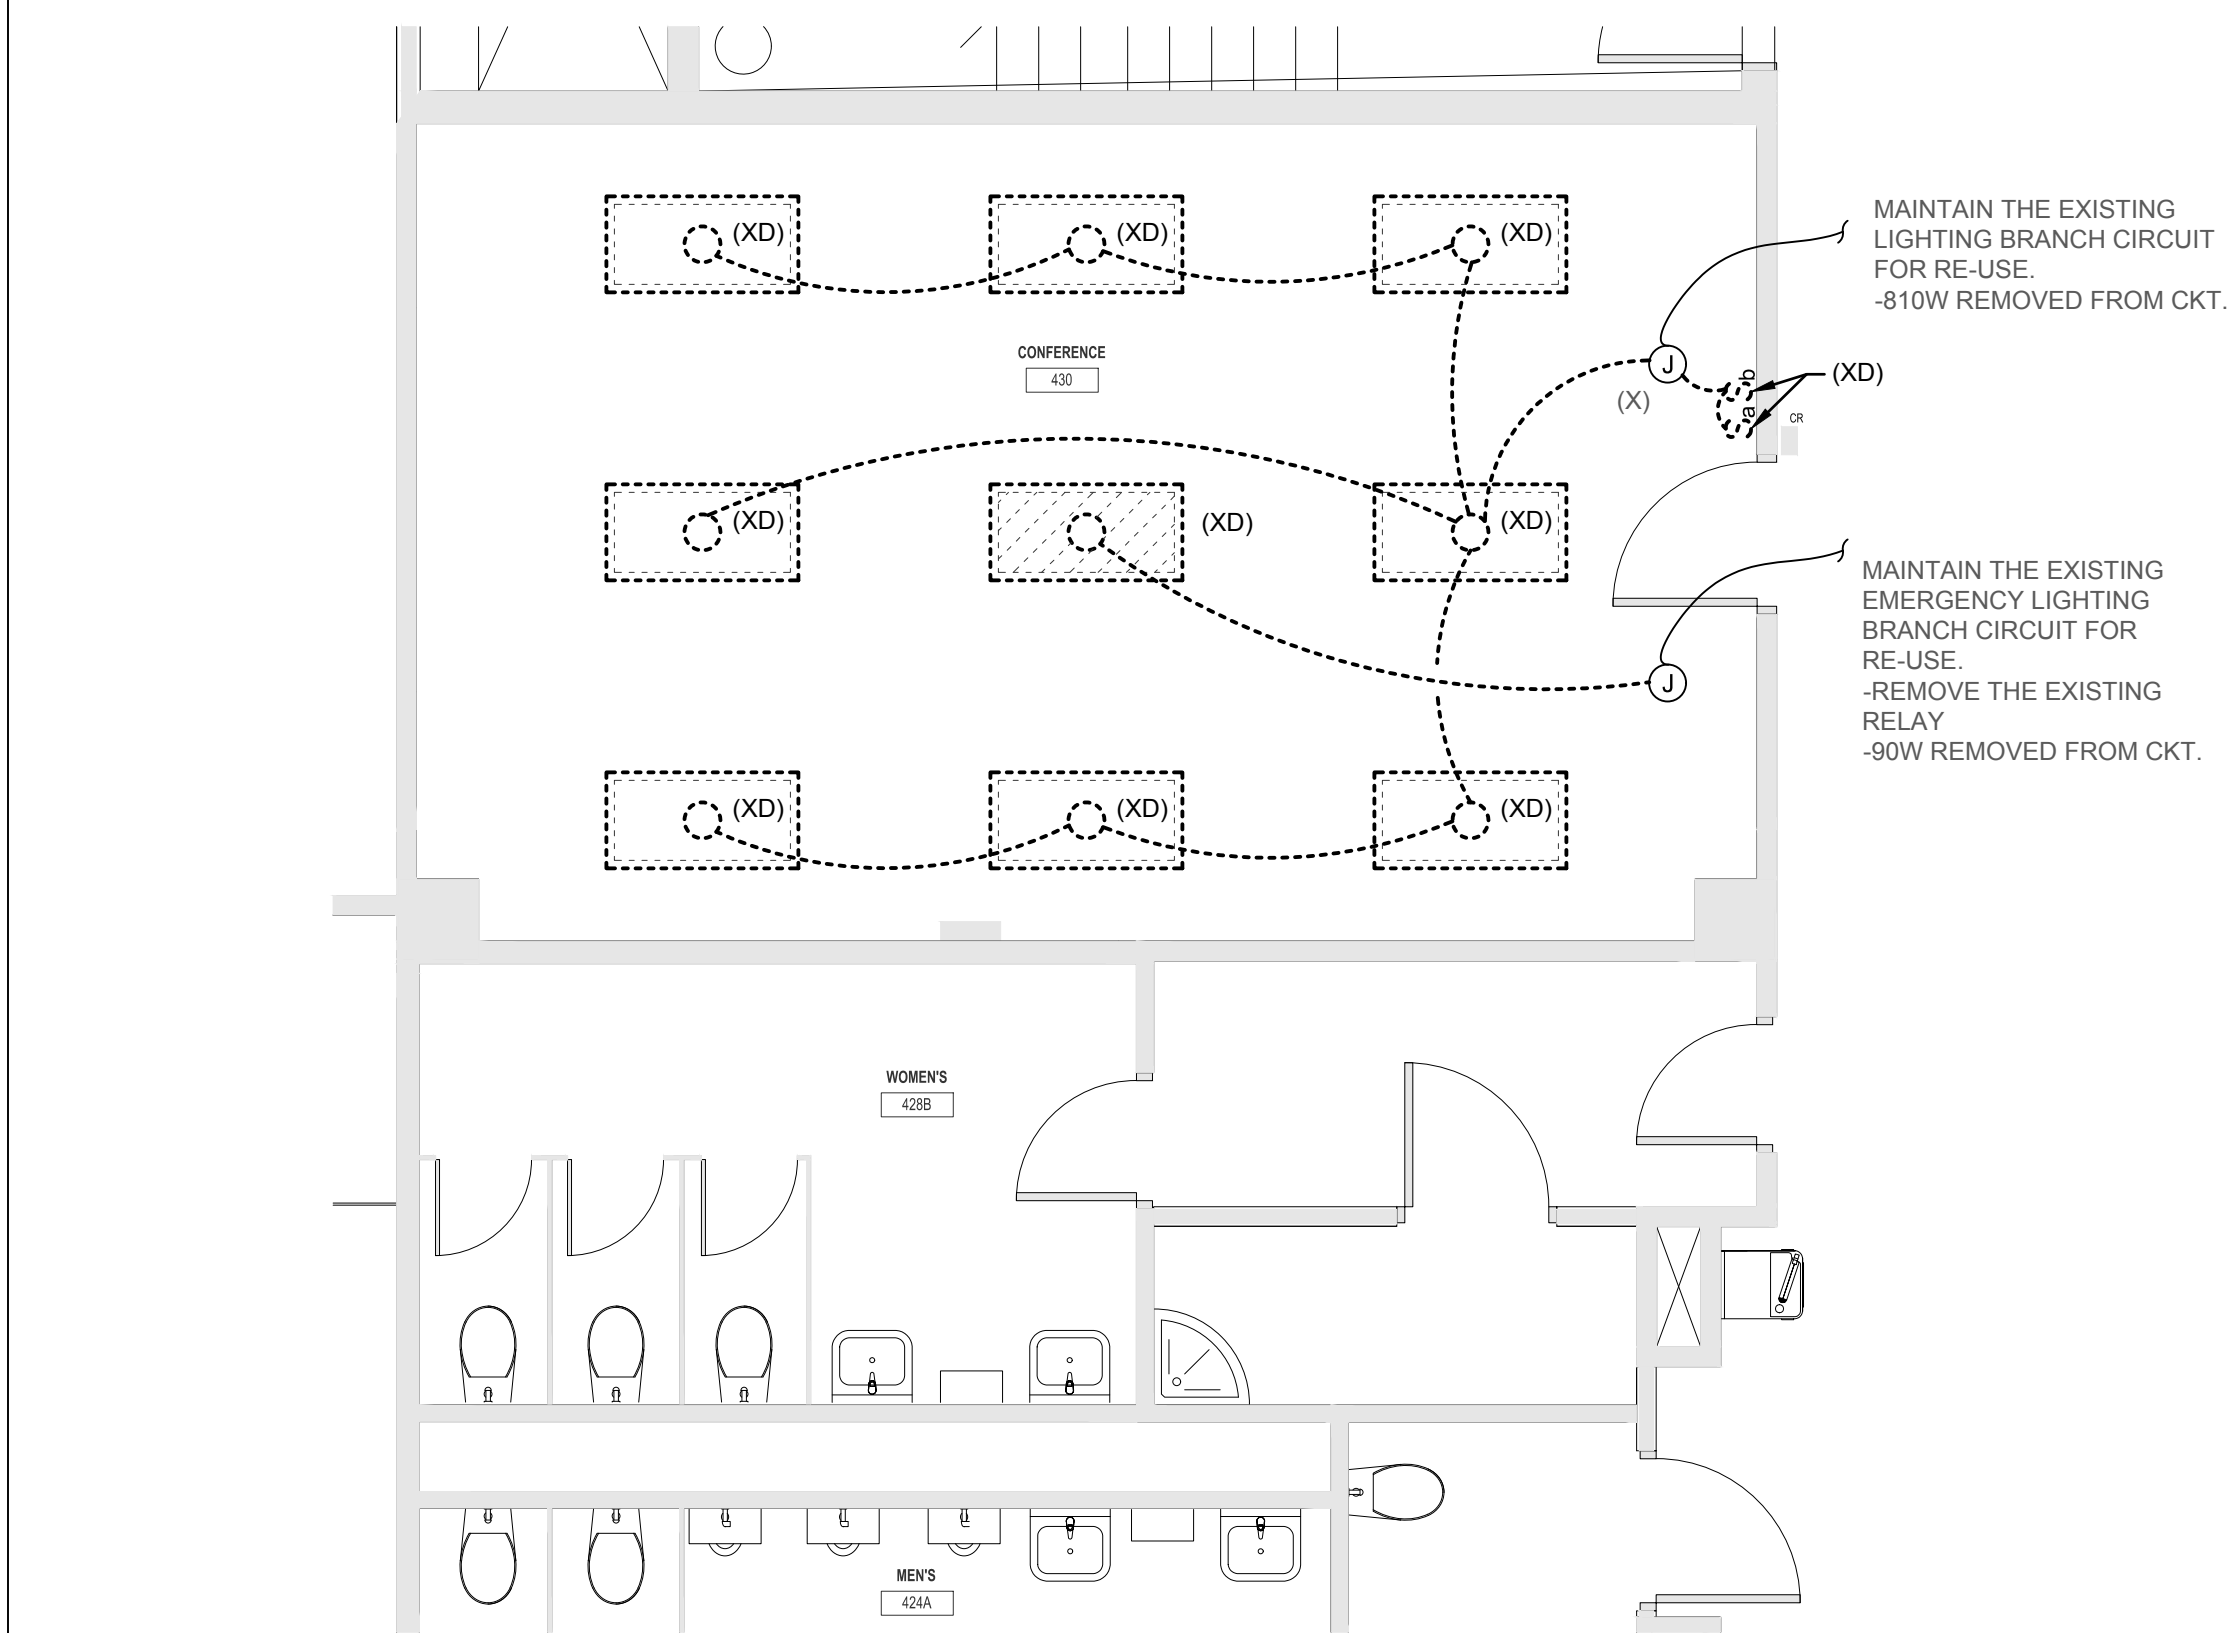

DEMOLITION NOTES:	
1	IN GENERAL, THE ELECTRICAL ITEMS AND ASSOCIATED DEVICES SHOWN DASHED SHALL BE REMOVED AND THOSE ITEMS SHOWN LIGHTLY ARE TO REMAIN.
2	ALL SERVICES, WHETHER SHOWN OR NOT, WHICH ARE TO REMAIN, SHALL BE MAINTAINED BY THE CONTRACTOR AND SERVICE SHALL BE REROUTED AS REQUIRED TO MAINTAIN THEM.
3	THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILIAR WITH THE EXISTING CONDITIONS AND SHALL BE RESPONSIBLE FOR THE DEMOLITION WORK REQUIRED BY THE NEW WORK AND THE GENERAL DEMOLITION.
4	CONTRACTOR IS RESPONSIBLE FOR REMOVING AND RE-INSTALLING CEILING TILES AND CEILING SUPPORT SYSTEMS, TILES, ETC., DAMAGED BY CONTRACTOR, SHALL BE REPLACED BY CONTRACTOR. PROVIDE A LIST OF DAMAGED TILES, ETC. PRIOR TO REMOVAL & SIGNED BY THE OWNER. SEND COPY TO THE ARCHITECT.

LIGHTING GENERAL NOTES:	
1	THE ELECTRICAL CONTRACTOR SHALL BECOME FAMILIAR WITH ALL OTHER CONTRACT DOCUMENTS, AND SHALL BE RESPONSIBLE FOR THE ELECTRICAL WORK REQUIRED BY THESE DOCUMENTS.
2	COORDINATE SWITCH BOX LOCATIONS WITH FURNITURE, CABINETS, DOORS, SIDE LITES, ETC.. IN GENERAL, SWITCHES SHALL BE ADJACENT TO LATCH SIDE OF DOOR. REFER TO ARCHITECTURAL ELEVATIONS.
3	COORDINATE ROUTING OF CONDUITS WITH OTHER TRADES. CONDUITS SHALL BE RUN PARALLEL AND PERPENDICULAR TO WALLS, CEILINGS, AND FLOORS. PROVIDE JUNCTION AND/OR PULL BOXES AS REQUIRED BY FIELD CONDITIONS.
4	PROVIDE IDENTIFICATION FOR EQUIPMENT, DEVICES & BRANCH CIRCUIT CONDUCTORS AS CALLED FOR IN THE SPECIFICATIONS.
5	REFER TO THE SYMBOLS LIST AND SPECIFICATIONS FOR MOUNTING HEIGHTS OF DEVICES.
6	REFER TO PROJECT SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS, EQUIPMENT SCHEDULES AND DETAILS.
7	COORDINATE THE LOCATION OF LIGHTS, ETC. WITH OTHER TRADES. IN GENERAL, LIGHTS, ETC. SHALL BE MOUNTED IN THE CENTER OF A CEILING TILE. REFER TO ARCHITECTURAL REFLECTED CEILING PLAN.
8	CONTRACTOR SHALL PROVIDE STRUCTURAL SUPPORT AS REQUIRED TO INSTALL LIGHTING FIXTURES.
9	EMERGENCY AND NORMAL POWERED LIGHTING BRANCH CIRCUITS SHALL BE INSTALLED IN SEPARATE RACEWAY SYSTEMS PER NEC 700
10	EXISTING BRANCH CIRCUITS SHALL BE REPLACED TO PROVIDE CIRCUITING AS INDICATED.
11	WHERE THE CONTRACTOR DEVIATES FROM THIS SET OF CONSTRUCTION DOCUMENTS AND RESUBMISSION OF REVISED DRAWINGS IS REQUIRED BY THE PERMITTING OFFICE/OFFICIAL, A MINIMUM CHARGE OF \$750.00 PER AFFECTED DRAWING SHEET WILL BE BILLED TO THE CONTRACTOR. THE REVISED DRAWINGS WILL NOT BE PROVIDED AND/OR SUBMITTED TO THE PERMIT OFFICE UNTIL A PURCHASE ORDER OR SIGNED AGREEMENT IS ISSUED BY THE CONTRACTOR TO THE DESIGN PROFESSIONAL FOR WORK REQUIRED. THIS SHALL NOT APPLY TO UNFORESEEN CONDITIONS OR CHANGES REQUIRED FOR THE PROJECT THAT ARE NOT INITIATED BY THE CONTRACTOR.

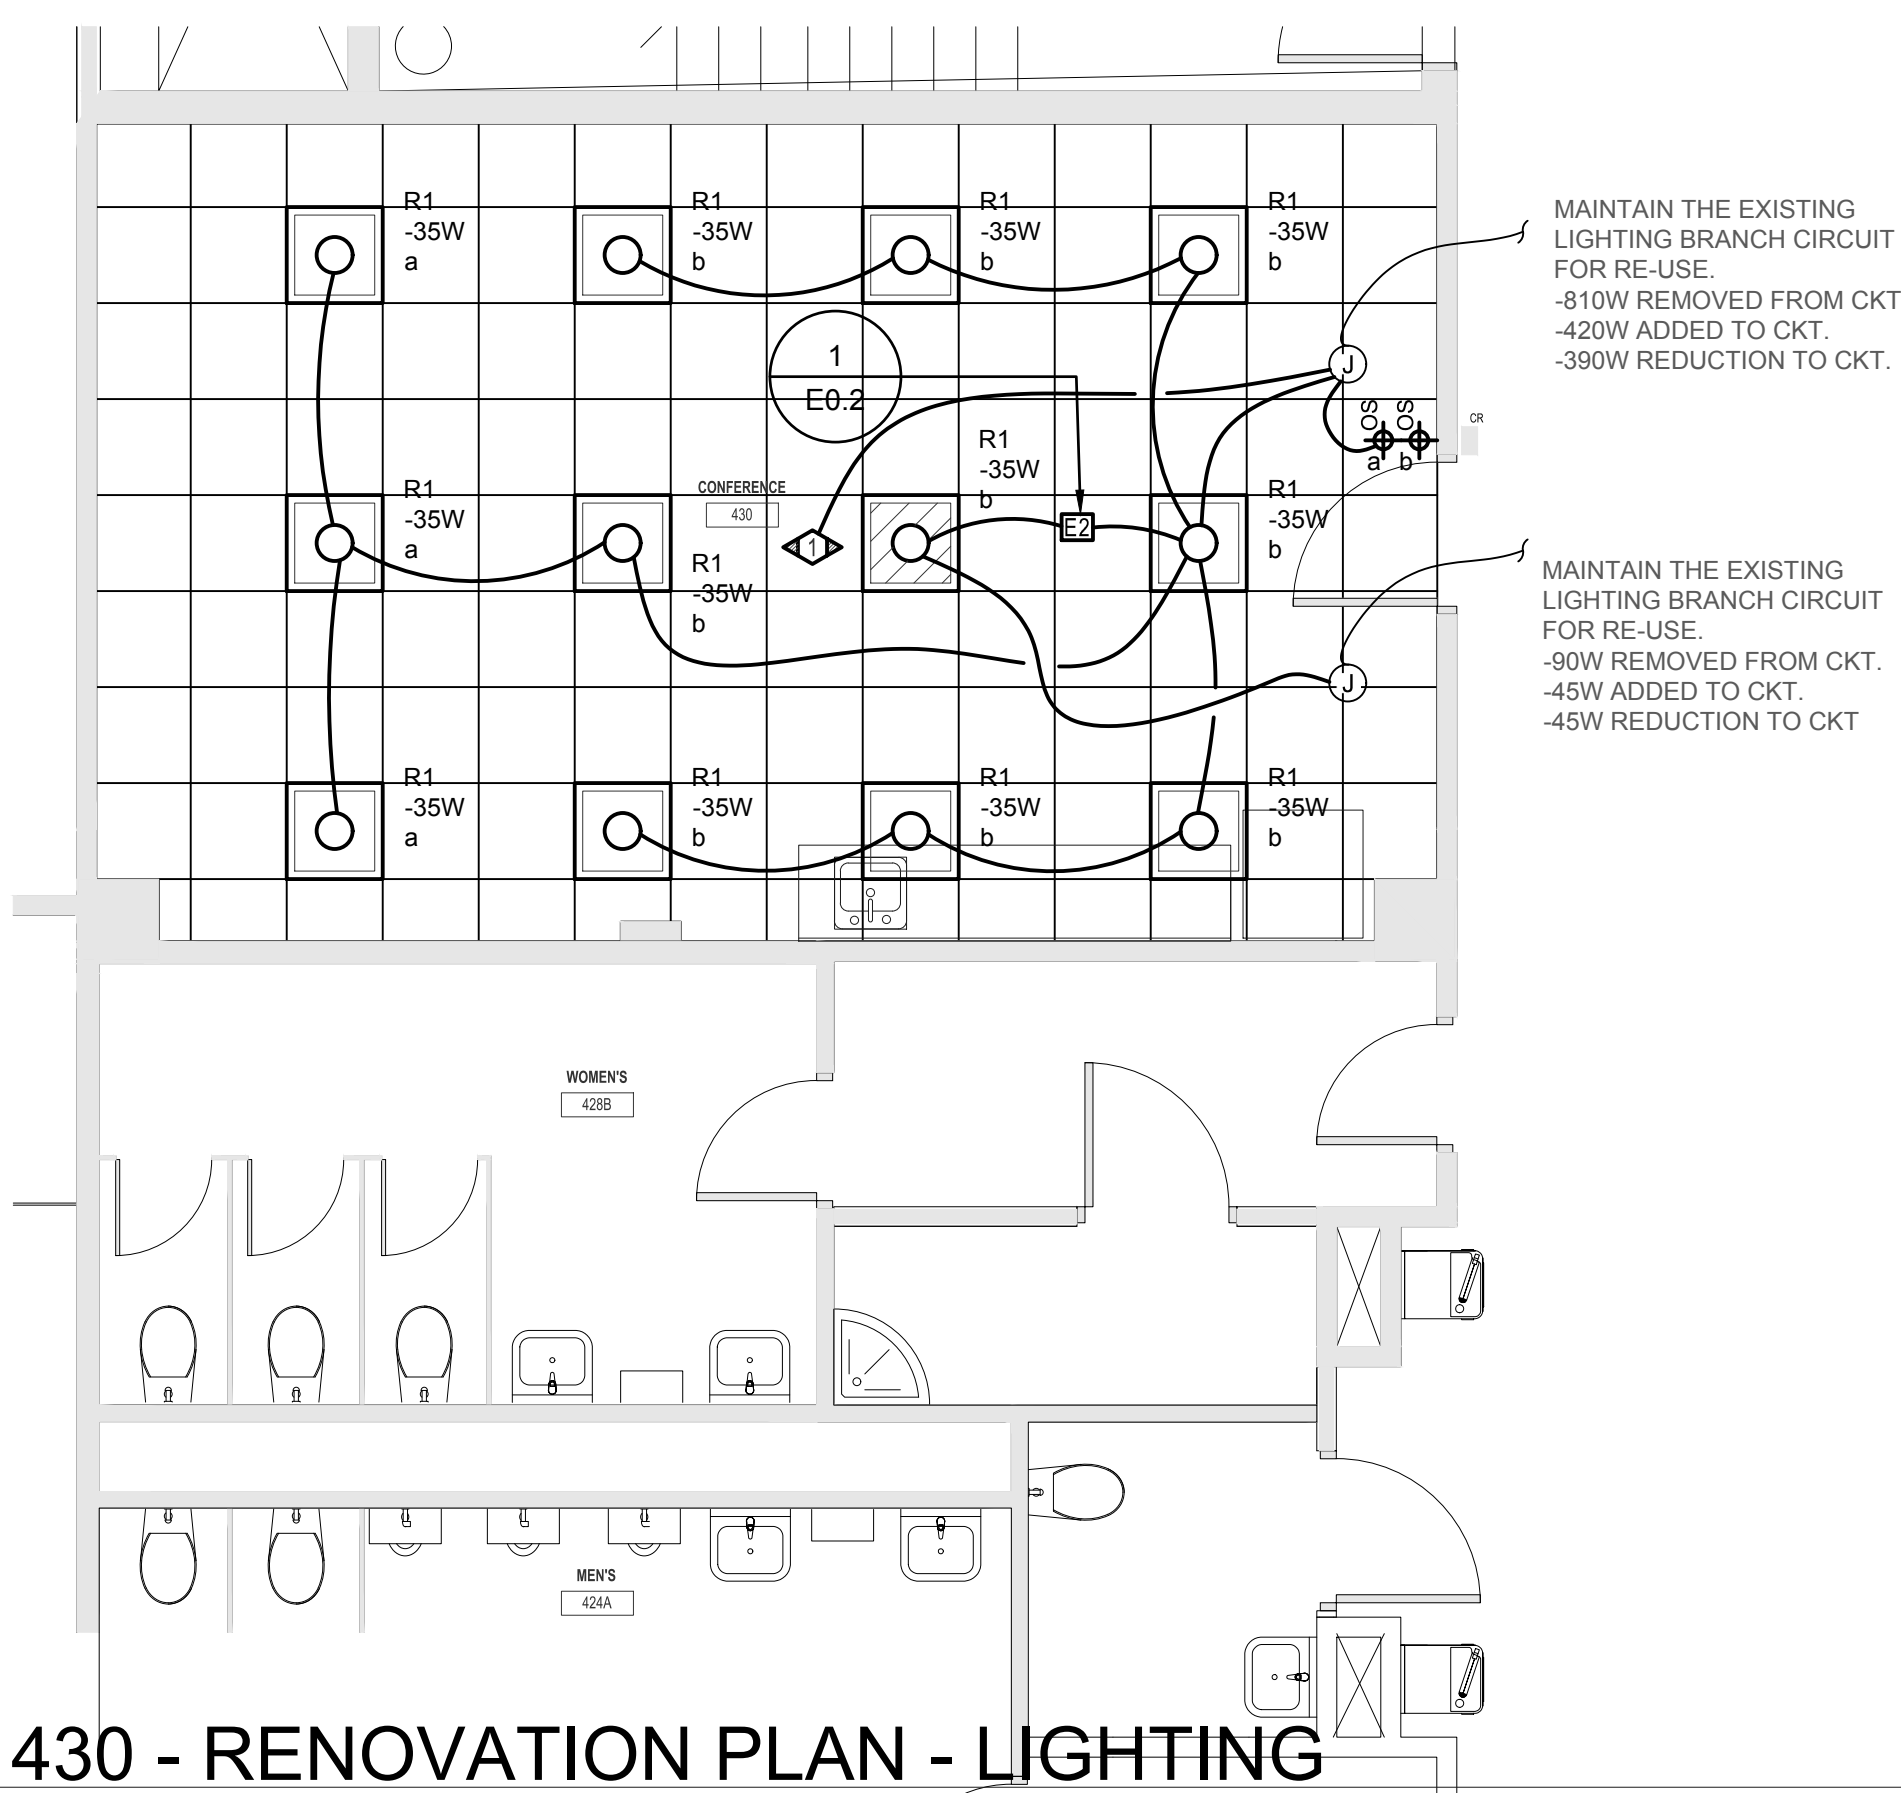


3 LEVEL 4 ROOM 430 - DEMOLITION PLAN - LIGHTING

E1.1 1/4" = 1'-0"


6 LEVEL 4 ROOM 430 - RENOVATION PLAN - LIGHTING

E1.1 1/4" = 1'-0"

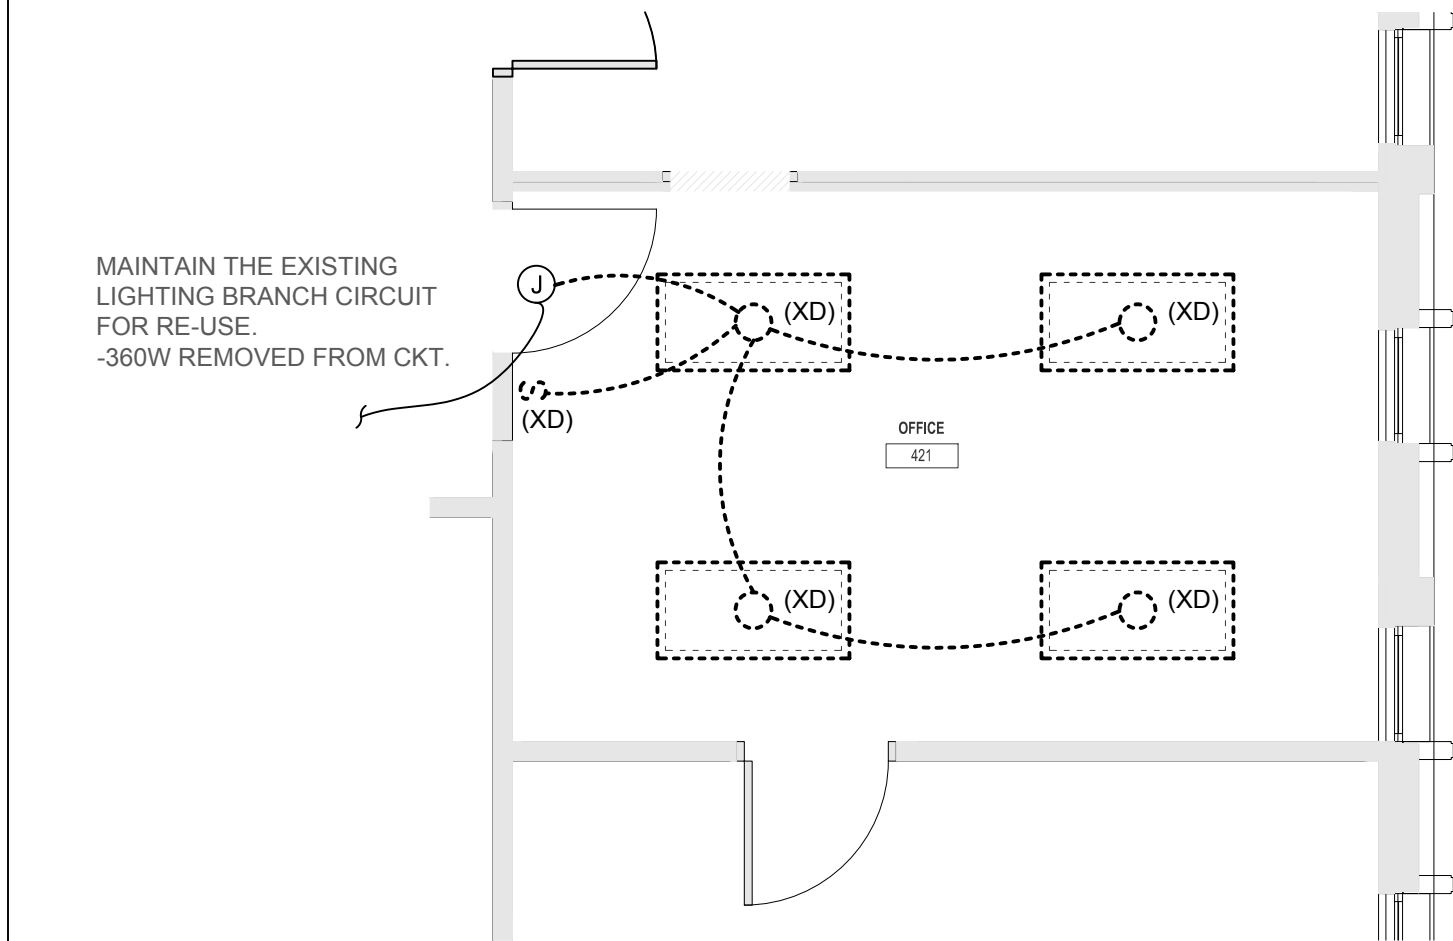


2 LEVEL 4 ROOM 421 - DEMOLITION PLAN - LIGHTING

E1.1 1/4" = 1'-0"

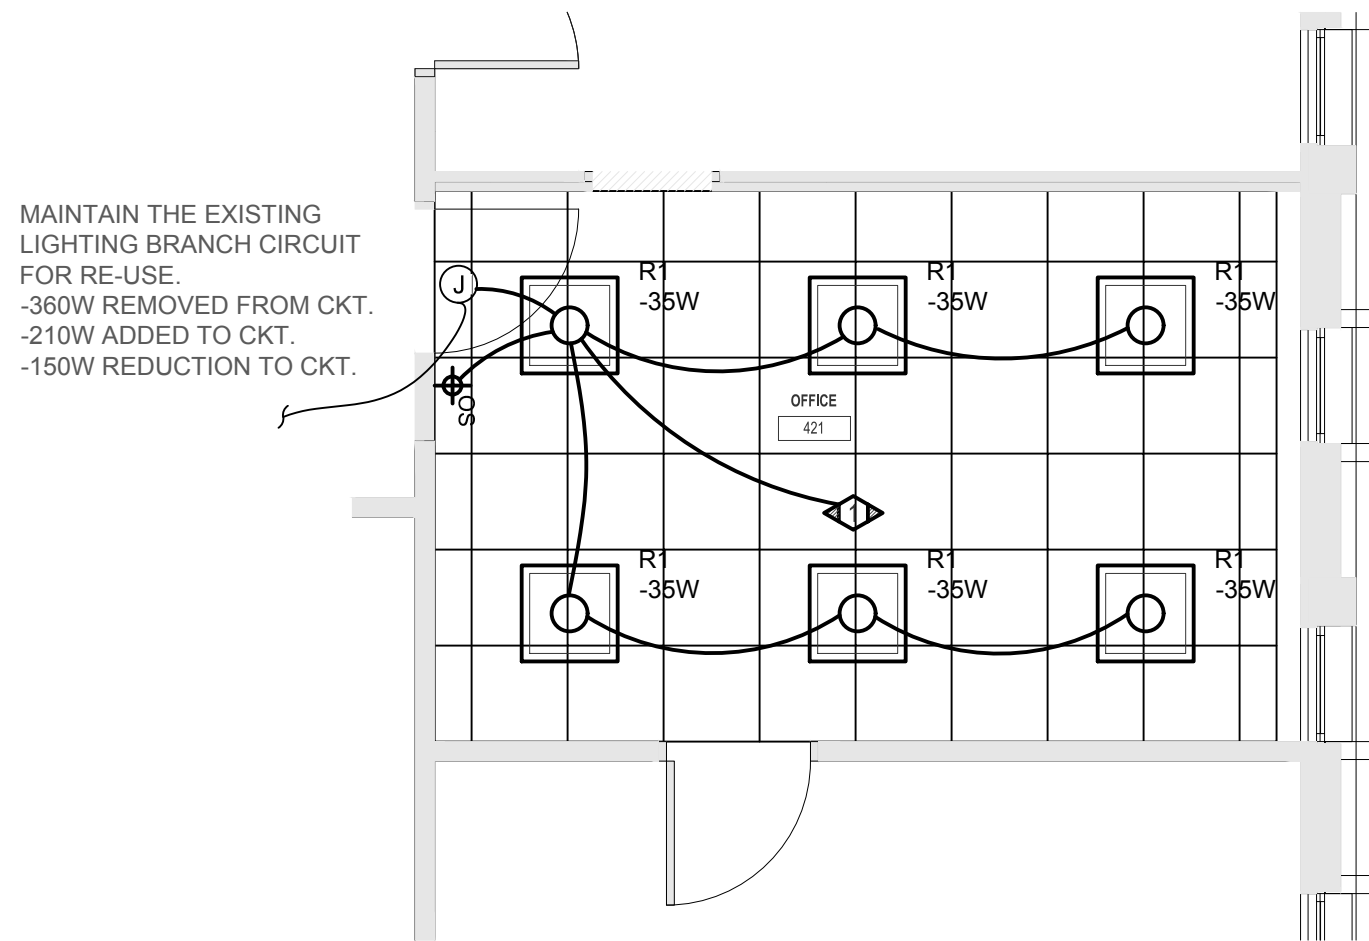


5 LEVEL 4 ROOM 421 - RENOVATION PLAN - LIGHTING

E1.1 1/4" = 1'-0"

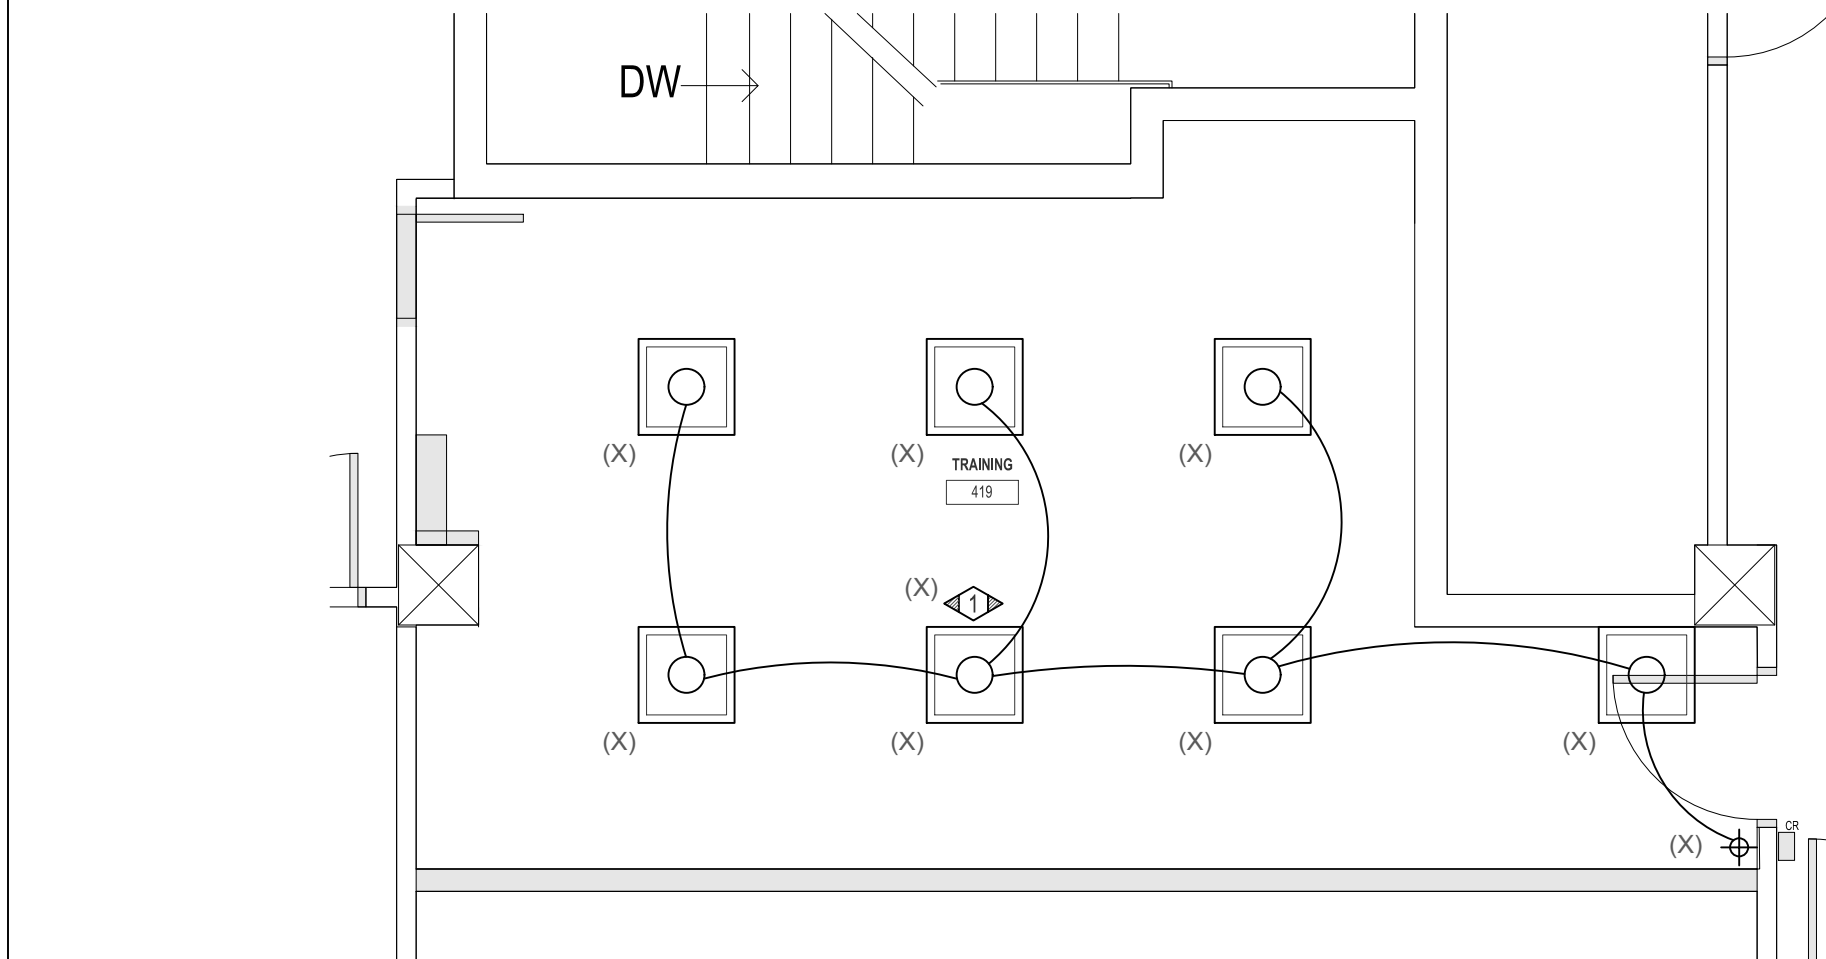

1 LEVEL 4 ROOM 419 - DEMOLITION PLAN - LIGHTING

E1.1 1/4" = 1'-0"

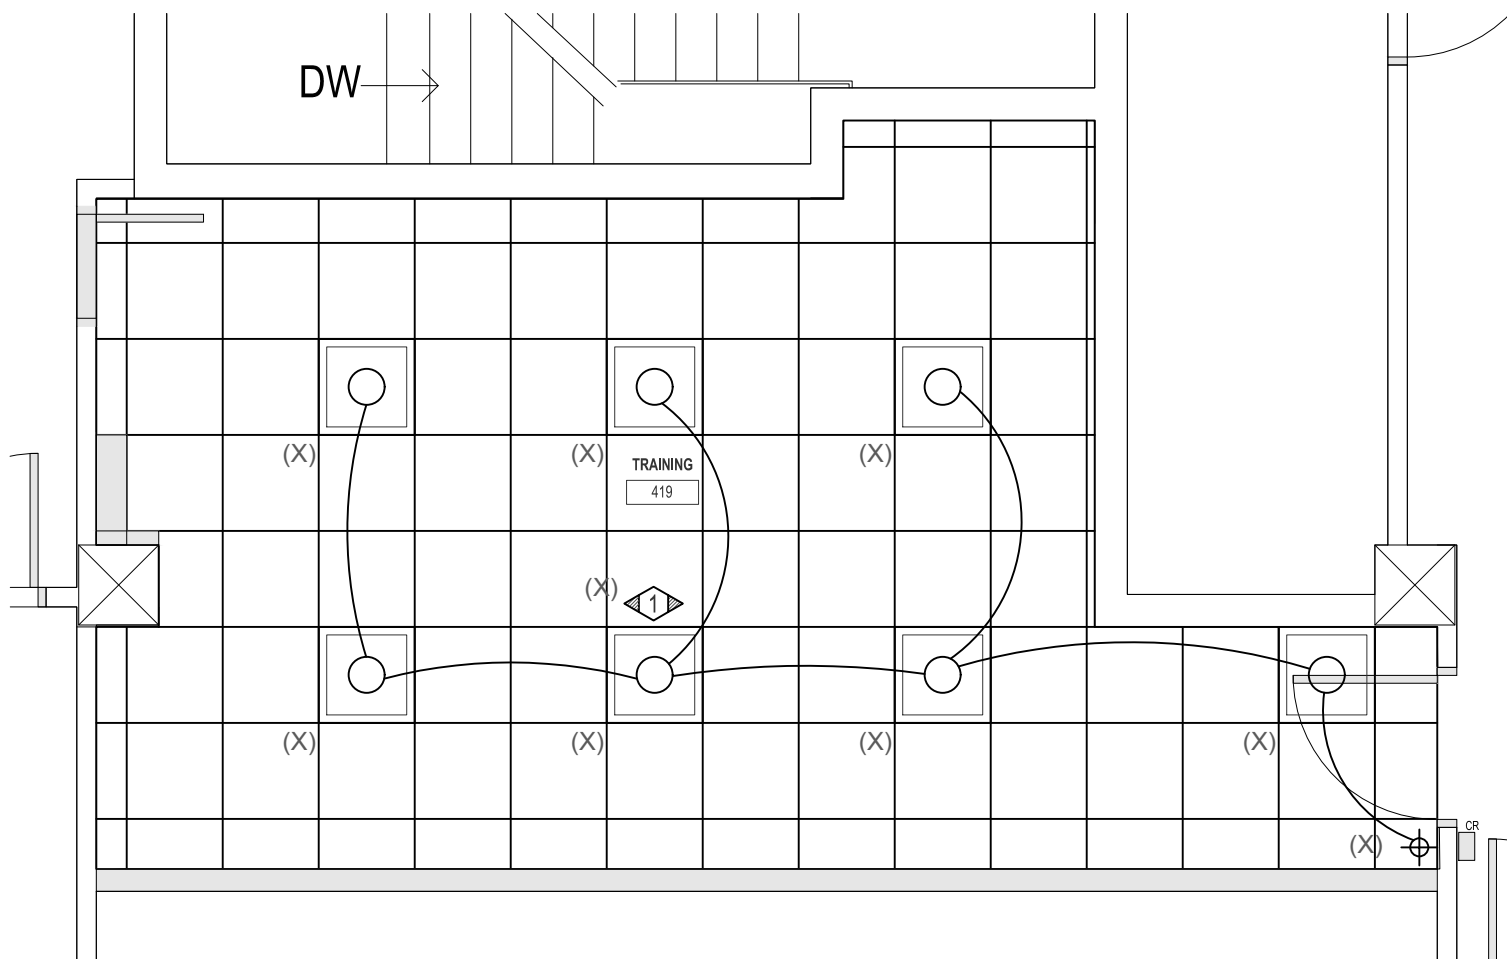


4 LEVEL 4 ROOM 419 - RENOVATION PLAN - LIGHTING

E1.1 1/4" = 1'-0"



1940 Buford Blvd. - Tallahassee, FL 32302
Phone: 850-402-3040
Fax: 850-402-9659
Certificate of Authorization #: 29709
Tomahawk Project #: 23056

RICHARD LINDBURG
PE#: 62829
MICHAEL BOYLE
PE#: 76983

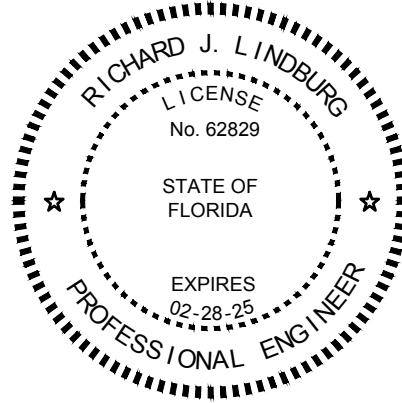

THIS ITEM HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY THE ENGINEER INDICATED HEREIN WITH THE DATE AS INDICATED IN THE TIME STAMP USING AN SHA CODE.
PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SHA AUTHENTICATION CODE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.



FSU BELLAMY
BUILDING

19480 Drawn By: BCP
Project Code Checked By: RJL

03 NOVEMBER, 2023

Date

100% CONTRACT
DOCUMENTS

Revisions


▲
▲
▲
▲
▲
▲
▲
▲
▲
▲

LEVEL 4 ENLARGED
PLANS - DEMO & RENO
- LIGHTING

Tallahassee Florida

E1.1


2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978

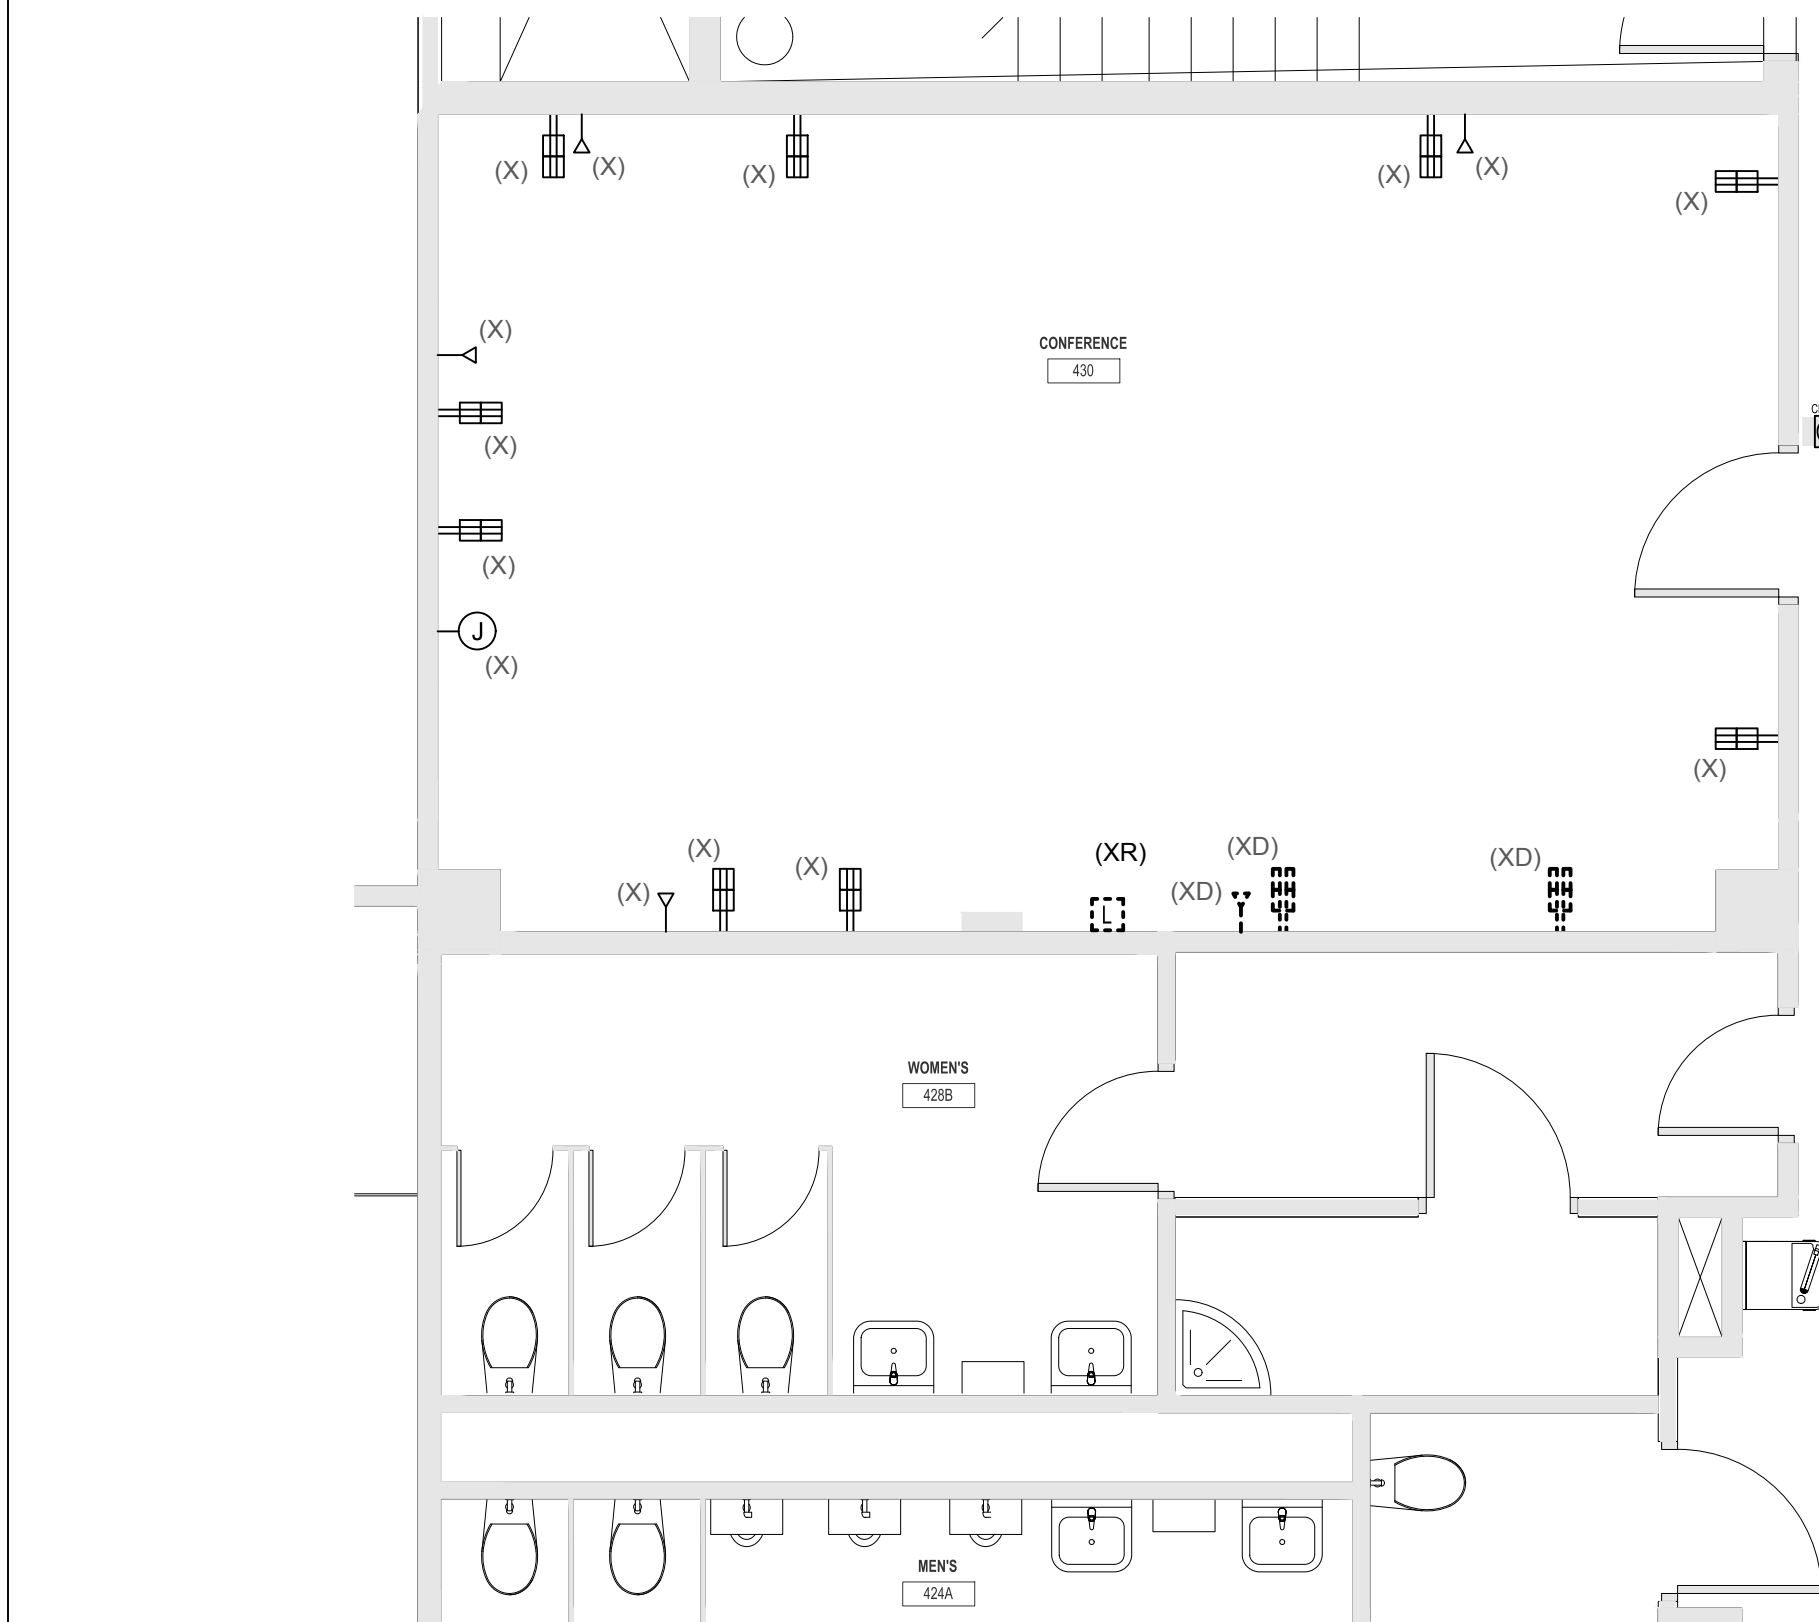

DEMOLITION NOTES:

- 1 IN GENERAL, THE ELECTRICAL ITEMS AND ASSOCIATED DEVICES SHOWN DASHED SHALL BE REMOVED AND THOSE ITEMS SHOWN LIGHTLY ARE TO REMAIN.
- 2 ALL SERVICES, WHETHER SHOWN OR NOT, WHICH ARE TO REMAIN, SHALL BE MAINTAINED BY THE CONTRACTOR AND SERVICE SHALL BE REROUTED AS REQUIRED TO MAINTAIN THEM.
- 3 THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILIAR WITH THE EXISTING CONDITIONS AND SHALL BE RESPONSIBLE FOR THE DEMOLITION WORK REQUIRED BY THE NEW WORK AND THE GENERAL DEMOLITION.
- 4 CONTRACTOR IS RESPONSIBLE FOR REMOVING AND RE-INSTALLING CEILING TILES AND CEILING SUPPORT SYSTEMS. TILES, ETC., DAMAGED BY CONTRACTOR, SHALL BE REPLACED BY CONTRACTOR. PROVIDE A LIST OF DAMAGED TILES, ETC., PRIOR TO REMOVAL & SIGNED BY THE OWNER. SEND COPY TO THE ARCHITECT.


- POWER AND SYSTEMS GENERAL NOTES:
- 1 THE ELECTRICAL CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILIAR WITH THE EXISTING CONDITIONS. ALL OTHER CONTRACT DOCUMENTS, AND SHALL BE RESPONSIBLE FOR THE ELECTRICAL WORK REQUIRED BY THESE DOCUMENTS.
 - 2 THE ELECTRICAL CONTRACTOR SHALL BECOME FAMILIAR WITH ALL OTHER CONTRACT DOCUMENTS, AND SHALL BE RESPONSIBLE FOR THE ELECTRICAL WORK REQUIRED BY THESE DOCUMENTS.
 - 3 OUTLET BOXES SHALL NOT BE MOUNTED BACK TO BACK. OFFSET OUTLET BOXES TO MINIMIZE SOUND TRANSMISSION BETWEEN ROOMS.
 - 4 COORDINATE OUTLET BOX LOCATIONS WITH FURNITURE, CABINETS, AND EQUIPMENT. REFER TO ARCHITECTURAL ELEVATIONS.
 - 5 COORDINATE SWITCH BOX LOCATIONS WITH FURNITURE, CABINETS, DOORS, SIDE LITES, ETC.. IN GENERAL, SWITCHES SHALL BE ADJACENT TO LATCH SIDE OF DOOR. REFER TO ARCHITECTURAL ELEVATIONS.
 - 6 COORDINATE ROUTING OF CONDUITS WITH OTHER TRADES. CONDUITS SHALL BE RUN PARALLEL AND PERPENDICULAR TO WALLS, CEILINGS, AND FLOORS. PROVIDE JUNCTION AND/OR PULL BOXES AS REQUIRED BY FIELD CONDITIONS.
 - 7 PROVIDE IDENTIFICATION FOR EQUIPMENT, DEVICES & BRANCH CIRCUIT CONDUCTORS AS CALLED FOR IN THE SPECIFICATIONS.
 - 8 REFER TO THE SYMBOLS LIST AND SPECIFICATIONS FOR MOUNTING HEIGHTS OF DEVICES.
 - 9 REFER TO PROJECT SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS, EQUIPMENT SCHEDULES AND DETAILS.
 - 1 THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING
 - 0 TEMPORARY FIRE DETECTION AND ANNUNCIATION FOR AREAS UNDER THIS CONTRACT. THE CONTRACTOR SHALL NOTIFY AND SCHEDULE WITH THE OWNER PRIOR TO PROCEEDING WITH FIRE ALARM WORK. PROVIDE FIRE WATCH PERSONNEL AS REQUIRED BY NFPA 101 AND AS APPROVED BY THE AUTHORITY HAVING JURISDICTION (AHJ) FOR PERIODS WHEN THE FIRE ALARM SYSTEM IS INOPERABLE DUE TO PROJECT CONSTRUCTION.
 - 1 NEUTRAL CONDUCTORS SHALL NOT BE SHARED.
 - 1 IN GENERAL, THE ELECTRICAL ITEMS AND ASSOCIATED DEVICES SHOWN LIGHTLY SHALL BE EXISTING AND THOSE ITEMS SHOWN DARK ARE TO BE NEW.
 - 1 WHERE THE CONTRACTOR DEVIATES FROM THIS SET OF
 - 3 CONSTRUCTION DOCUMENTS AND RESUBMISSION OF REVISED DRAWINGS IS REQUIRED BY THE PERMITTING OFFICE/OFFICIAL, A MINIMUM CHARGE OF \$750.00 PER AFFECTED DRAWING SHEET WILL BE BILLED TO THE CONTRACTOR. THE REVISED DRAWINGS WILL NOT BE PROVIDED AND/OR SUBMITTED TO THE PERMIT OFFICE UNTIL A PURCHASE ORDER OR SIGNED AGREEMENT IS ISSUED BY THE CONTRACTOR TO THE DESIGN PROFESSIONAL FOR WORK REQUIRED. THIS SHALL NOT APPLY TO UNFORESEEN CONDITIONS OR CHANGES REQUIRED FOR THE PROJECT THAT ARE NOT INITIATED BY THE CONTRACTOR.

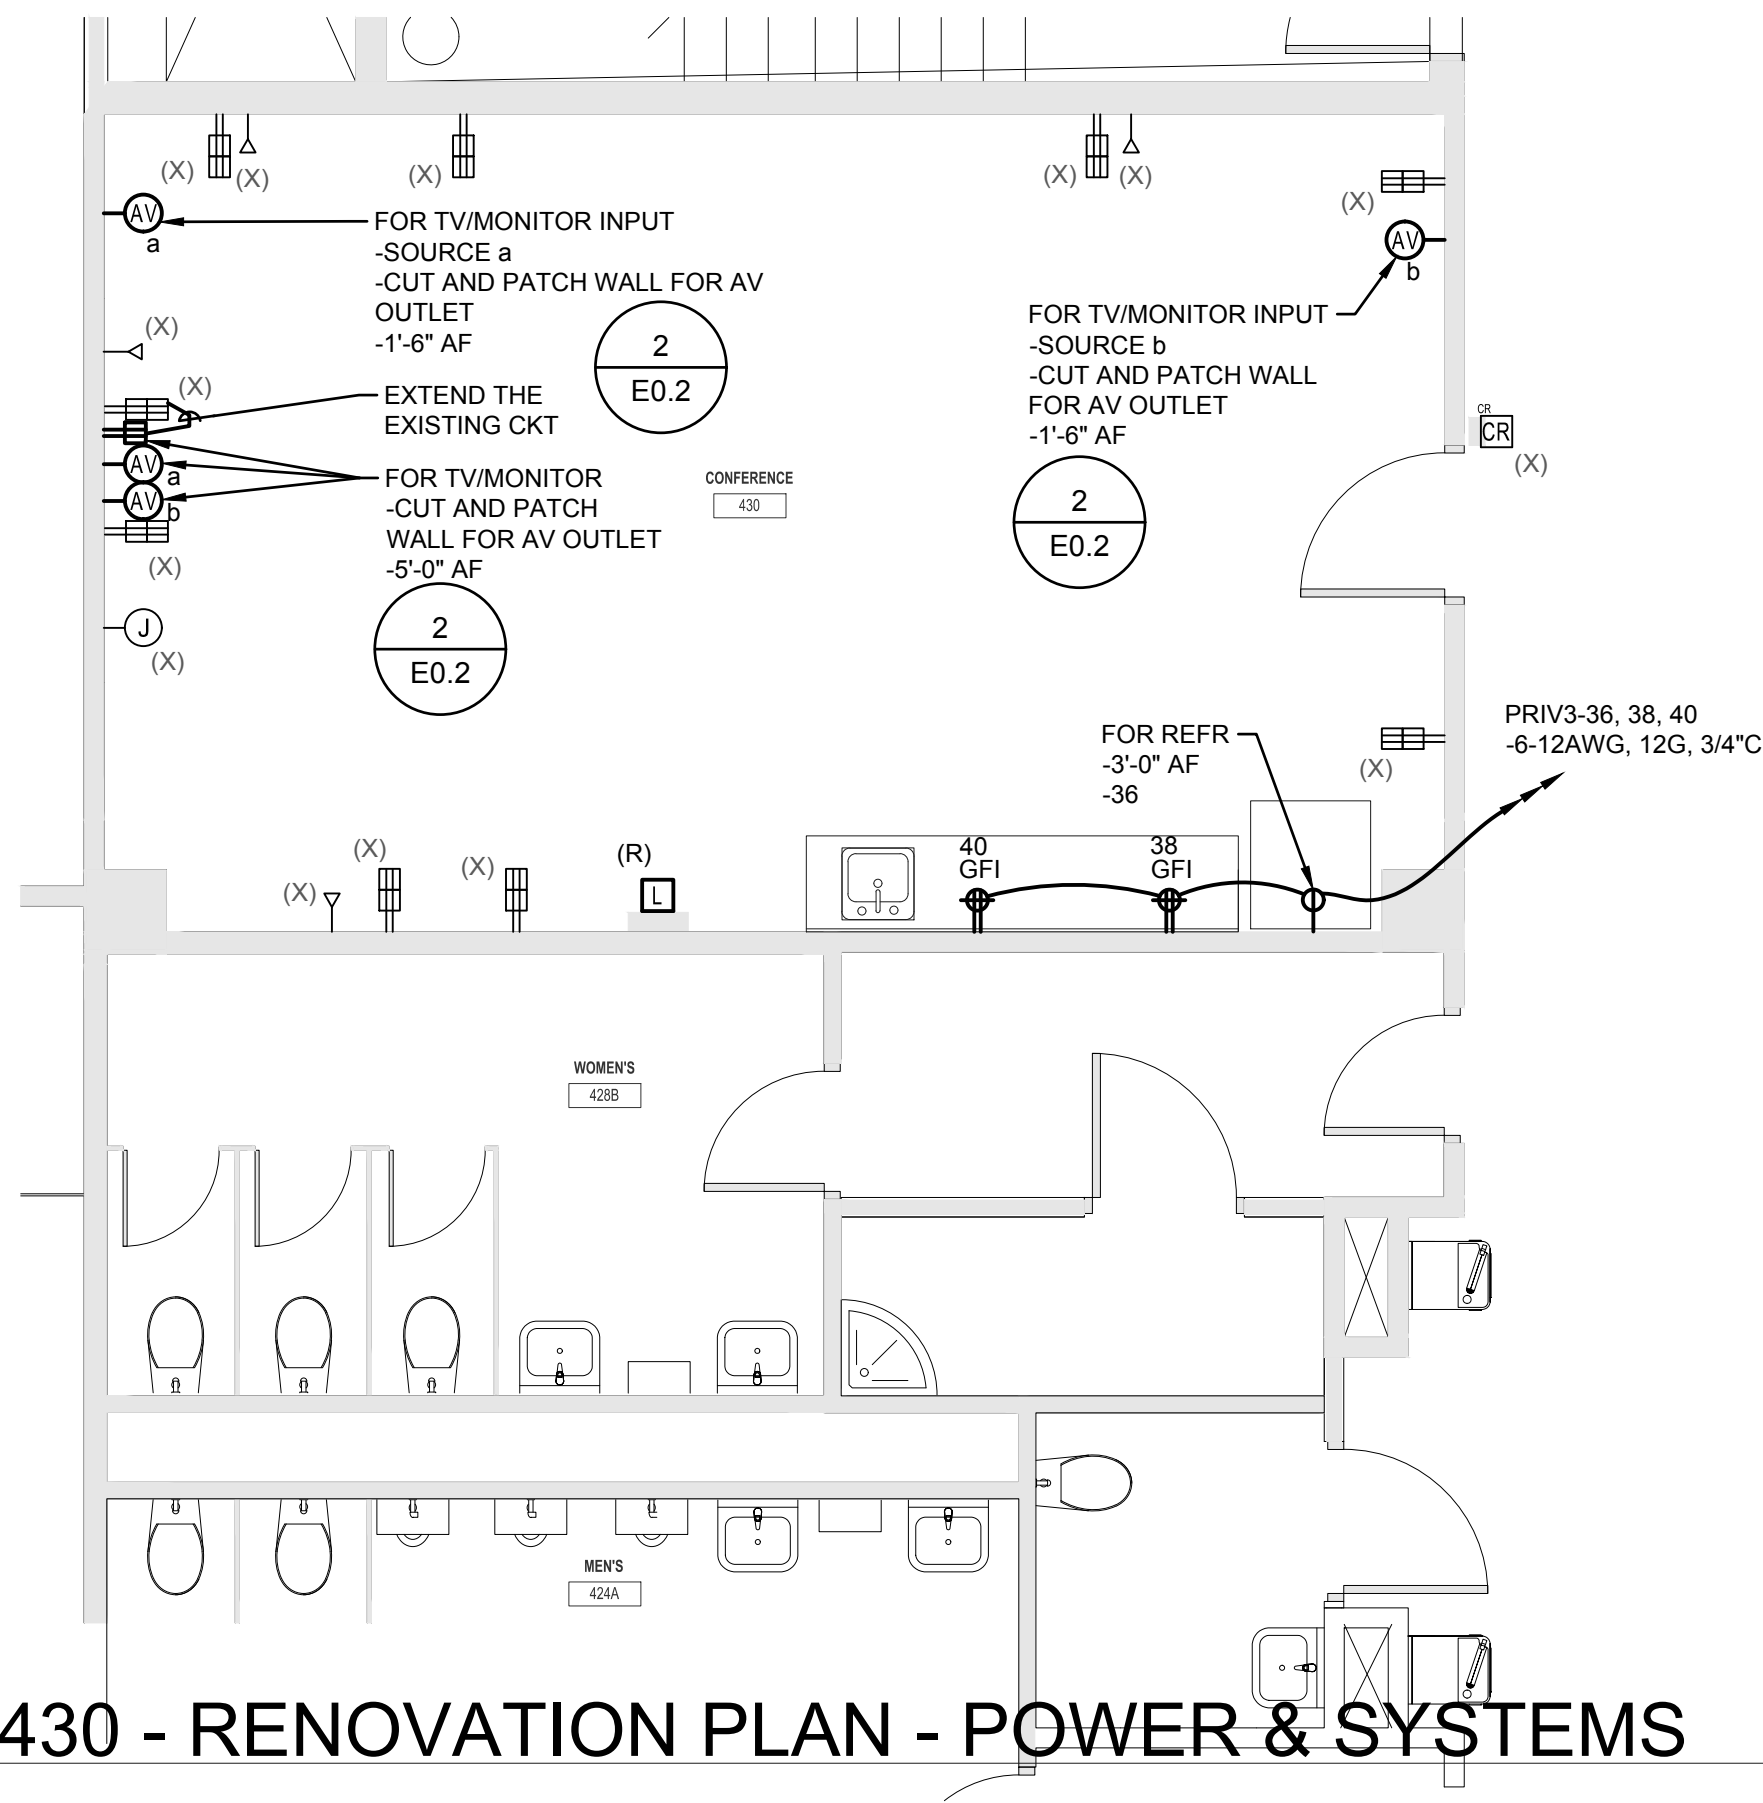**3 LEVEL 4 ROOM 430 - DEMOLITION PLAN - POWER & SYSTEMS**


E2.1 1/4" = 1'-0"

6 LEVEL 4 ROOM 430 - RENOVATION PLAN - POWER & SYSTEMS


E2.1 1/4" = 1'-0"

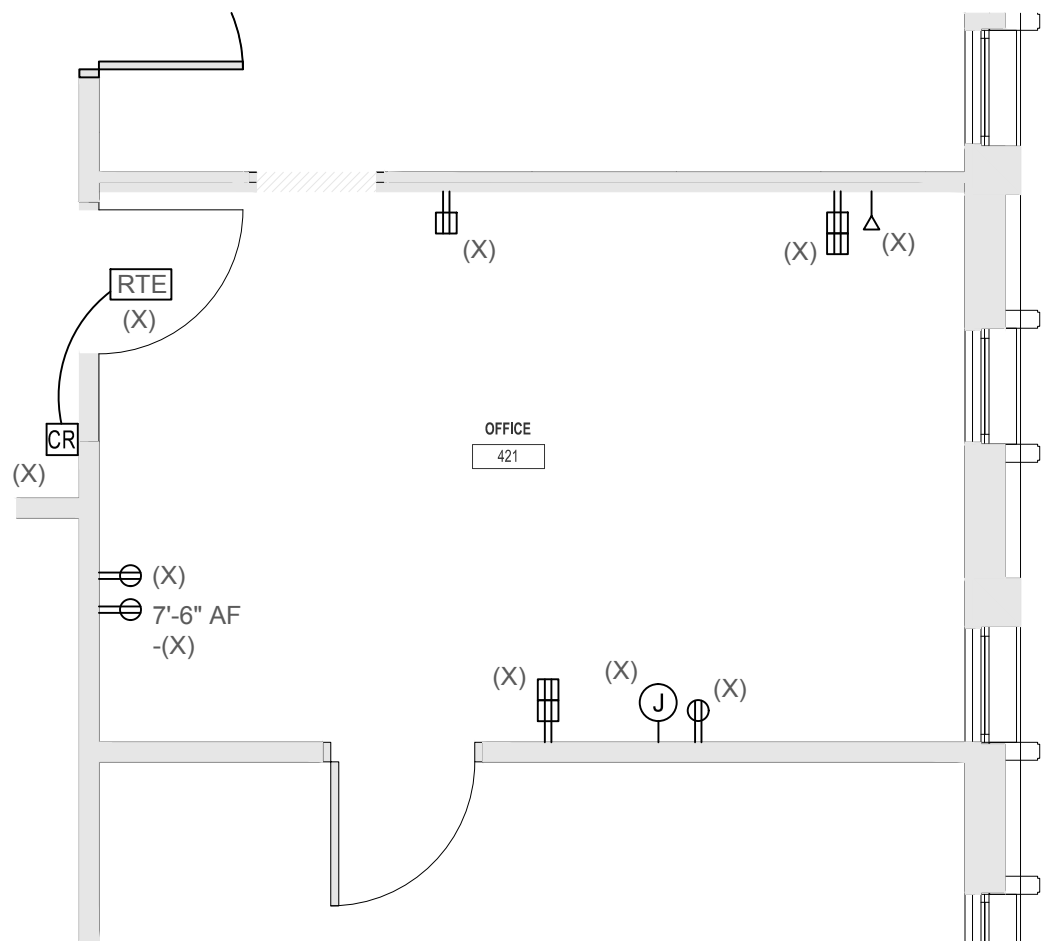**2 LEVEL 4 ROOM 421 - DEMOLITION PLAN - POWER & SYSTEMS**


E2.1 1/4" = 1'-0"

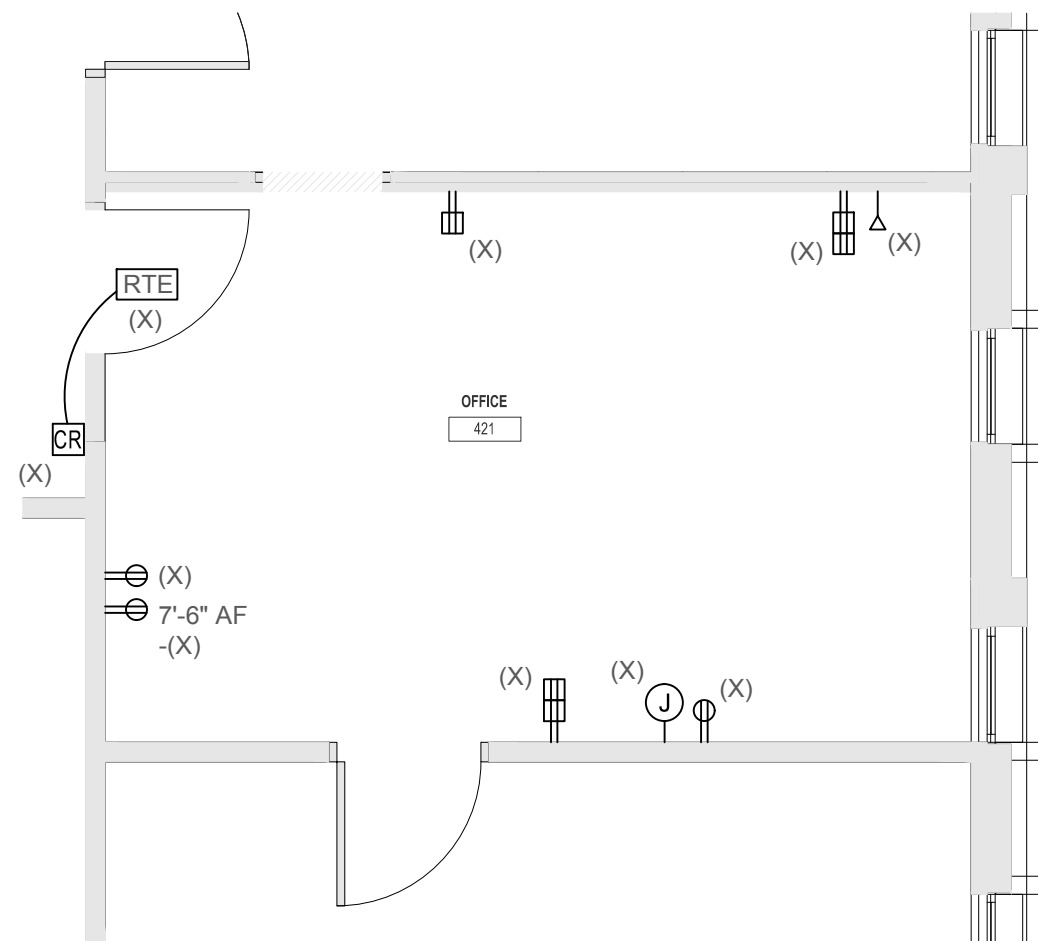**5 LEVEL 4 ROOM 421 - RENOVATION PLAN - POWER & SYSTEMS**

E2.1 1/4" = 1'-0"

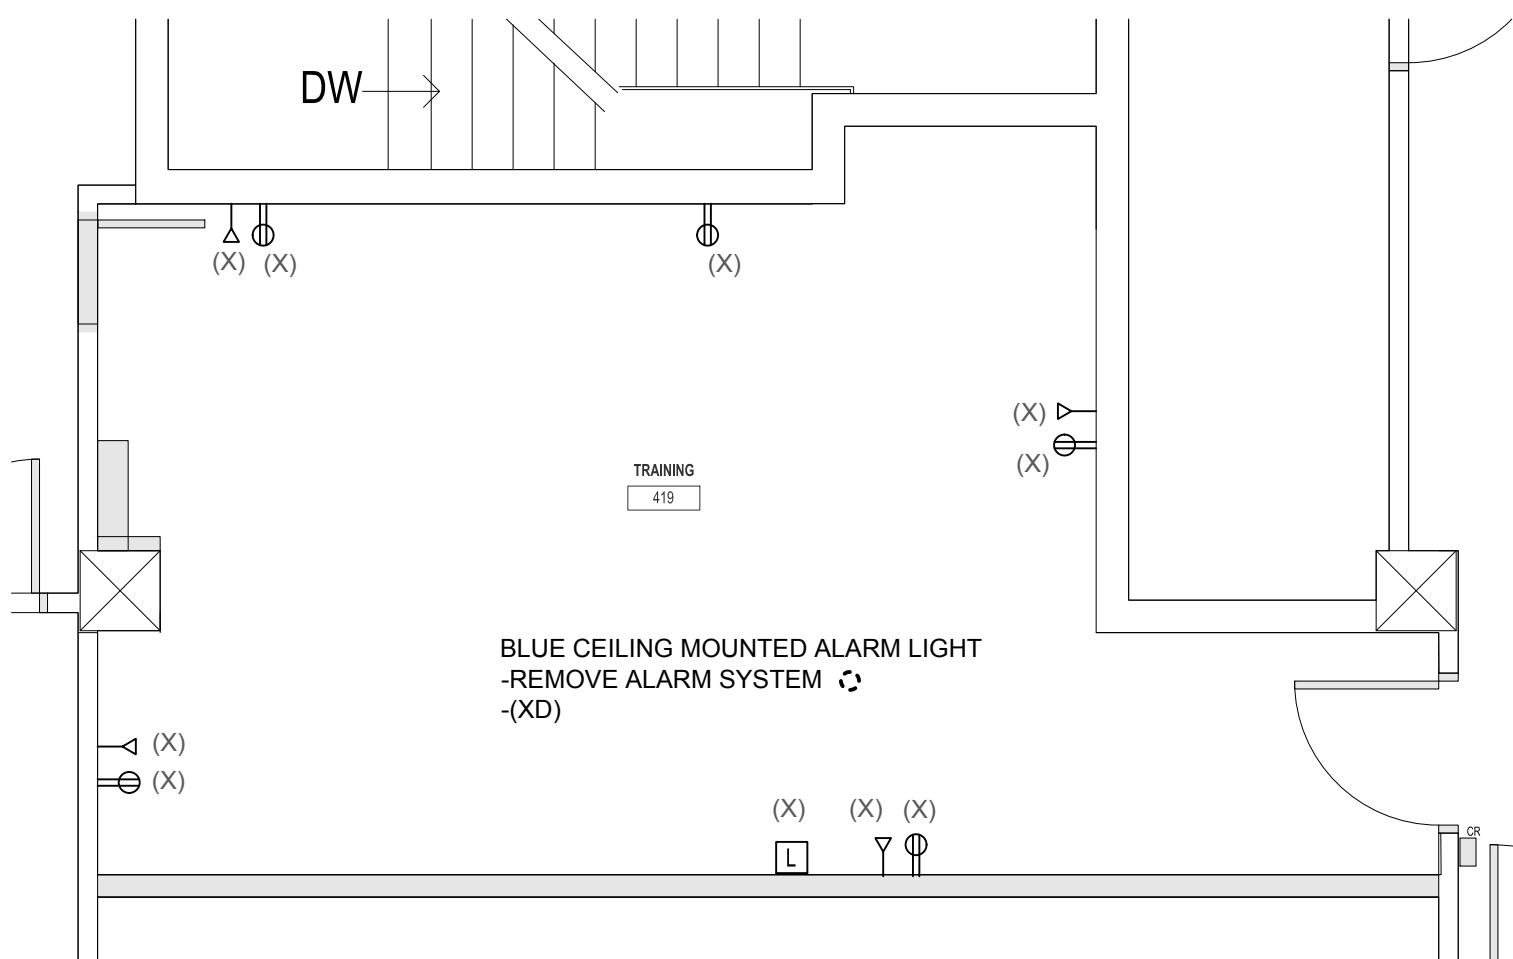**1 LEVEL 4 ROOM 419 - DEMOLITION PLAN - POWER & SYSTEMS**

E2.1 1/4" = 1'-0"

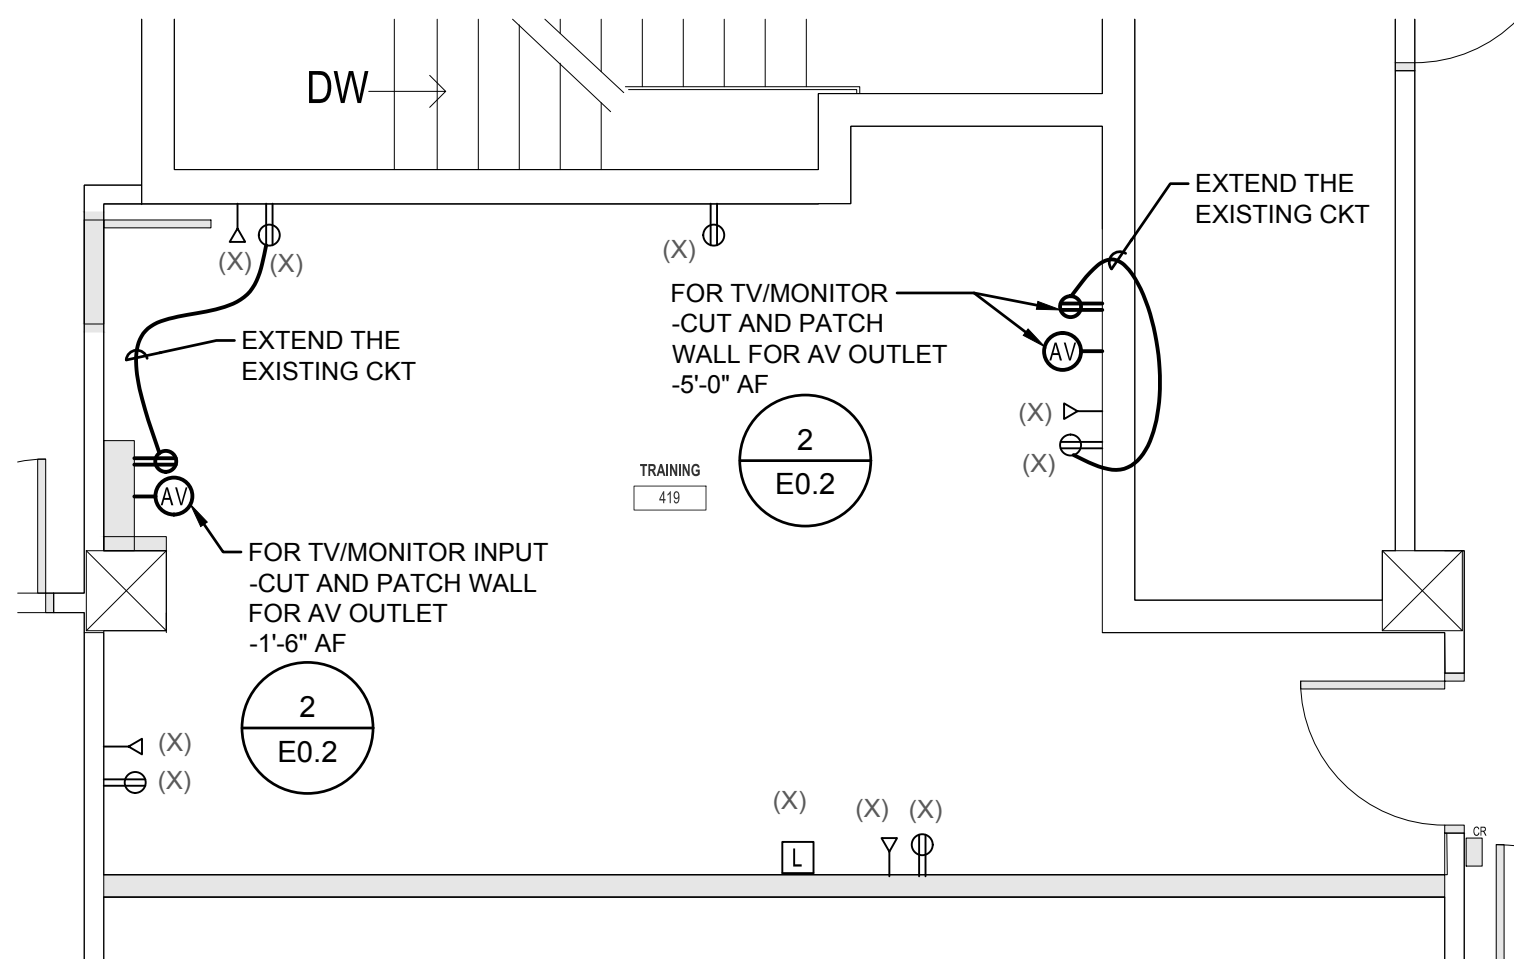
**4 LEVEL 4 ROOM 419 - RENOVATION PLAN - POWER & SYSTEMS**

E2.1 1/4" = 1'-0"



1940 Buford Blvd. - Tallahassee, FL 32302
Phone: 850-402-3040
Fax: 850-402-9659
Certificate of Authorization #: 29709
Tomahawk Project #: 23056

RICHARD LINDBURG
PE#: 62829
MICHAEL BOYLE
PE#: 76983

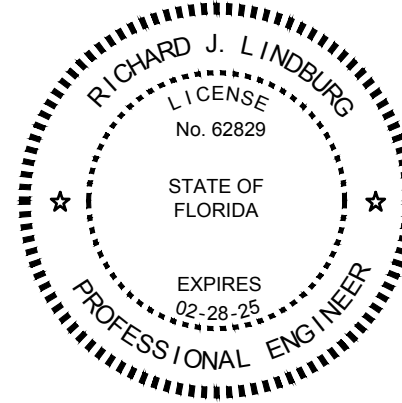

THIS ITEM HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY THE ENGINEER INDICATED HEREIN WITH THE DATE AS INDICATED IN THE TIME STAMP USING HIS SHA CODE.
PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SHA AUTHENTICATION CODE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.



FSU BELLAMY
BUILDING


19480 Drawn By: BCP
Project Code Checked By: RJL

03 NOVEMBER, 2023

Date

**100% CONTRACT
DOCUMENTS**

Revisions

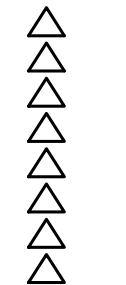**LEVEL 4 ENLARGED
PLANS - DEMO & RENO
- POWER & SYSTEMS**

Tallahassee Florida

E2.1

2074 Centre Pointe Blvd, Suite #200, Tallahassee, FL 32308
Phone 850 224-6301 Fax 850 561-6978